





LIGHT

How fortunate we are to be purveyors of such an incredibly impactful medium. This elemental necessity has created an industry running the full gamut from addressing our basic need to feel safe, to the most complex light layering with precision and dynamic control. When you think of Tech Lighting, you may not think of either of these extremes, but likely an image of something very special in-between comes to mind. It may include our timeless artisan glass. It may include our original LED-centric designs. It may include our sophisticated style with high-end finishes and performance-minded engineering. Or maybe you think of our highly configurable fixtures and systems designed to solve virtually any lighting challenge. When we reflect on our role in the world of lighting, we feel privileged to live and breathe all of the above. In this new Full Line Catalog, it is our pleasure to present our latest designs and innovations, and we hope our work inspires you to create something truly amazing.

1



OVERVIEW	VISUAL INDEX	PENDANTS	CHANDELIERS
		32	256
linear suspension	CEILING	wall & bath	HEADS & DISPLAY
314	342	390	534
SYSTEMS	accent & task	LAMPING	INDEX
508	630	654	664

PENDANTS

CHANDELIERS

OVERVIEW

VISUAL INDEX



We hope you find the following visual index to be a valuable tool and an easy way to get an effective overview of the entire full-line catalog.

Throughout this catalog you will find these icons which represent special features of our products. By making a few, key features easier to find, these icons will help you in selecting the best products for your specific application.

- Indicates which fixtures have an Incandescent option
- Indicates which fixtures have a Fluorescent option

Many fixtures can be custom ordered with fluorescent lamping options and programmed start ballasts, please contact quotes@generation-brands.com for details

- Indicates which fixtures are LED or have an LED option
- Indicates which fixtures have a Halogen option

- Indicates the Length of Mounting is included with the fixture
- Indicates fixture Mounting Position / Light Distribution
- Indicates which fixtures are Wet Listed
- IP-65 Indicates which fixtures are IP-65 Listed
- Indicates fixtures with Complementary Product

- ADA Indicates which fixtures are **ADA Compliant**
- Indicates which fixtures currently have Photometrics available on techlighting.com
- (Indicates which fixtures are Dark Sky Compliant
- T24 Indicates which fixtures are CEC Title 24 Compliant

Be sure to visit techlighting.com as we continually update our line of products with additional Title 24 Compliant fixtures

This catalog features item number grids for ease of ordering. For example, below is the item number grid for a Mini Echo pendant. Select from the bolded codes to build your item number of choice: 700FJECPQS-LEDS930 means you have selected the FreeJack option for the Mini Echo pendant in aquamarine with a satin nickel finish and LED lamp type.

700	SYST	EM	FJ	ECP	CC	LOR	Q	FII	NISH	5	LAMP	-LEDS930
	FJ MP MO MO2	MON	OPOINT*	NORAIL	Q C S	AMBER AQUAM CLEAR SMOKE STEEL BL		C	ANTIQU CHROM SATIN N		-24 -LEDS930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K

HOW TO BUY TECH LIGHTING

LIGHTING PROFESSIONAL


Tech Lighting products can be purchased through a network of helpful and knowledgeable sales representatives located Internationally. To find the representative nearest you, visit techlighting.com/HowToBuy, or call us at 847.410.4400

CONSUMER

Tech Lighting products are available in select lighting showrooms and internet retailers throughout North America. To find the showroom nearest you, visit techlighting.com/HowToBuy

FOR MORE INFORMATION

For detailed specification sheets, product instructions, system components, inspirational images, bill of material reference guides and much more, visit techlighting.com

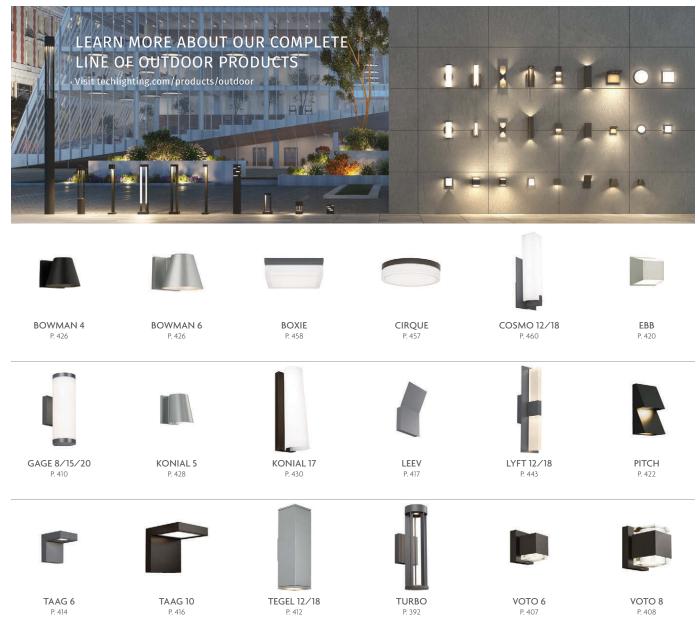

LEARN HOW OUR SYSTEMS CAN SOLVE YOUR LIGHTING CHALLENGE

P. 598-629



MONORAIL P. 600-605



TWO-CIRCUIT MONORAIL P. 606-611



WALL MONORAIL P. 612-617




KABLE LITE P. 618-623





T-TRAK P. 624-629


Need help setting up your system? Visit techlighting.com/systems or request a Tech Lighting Systems Ordering Guide


SYSTEMS

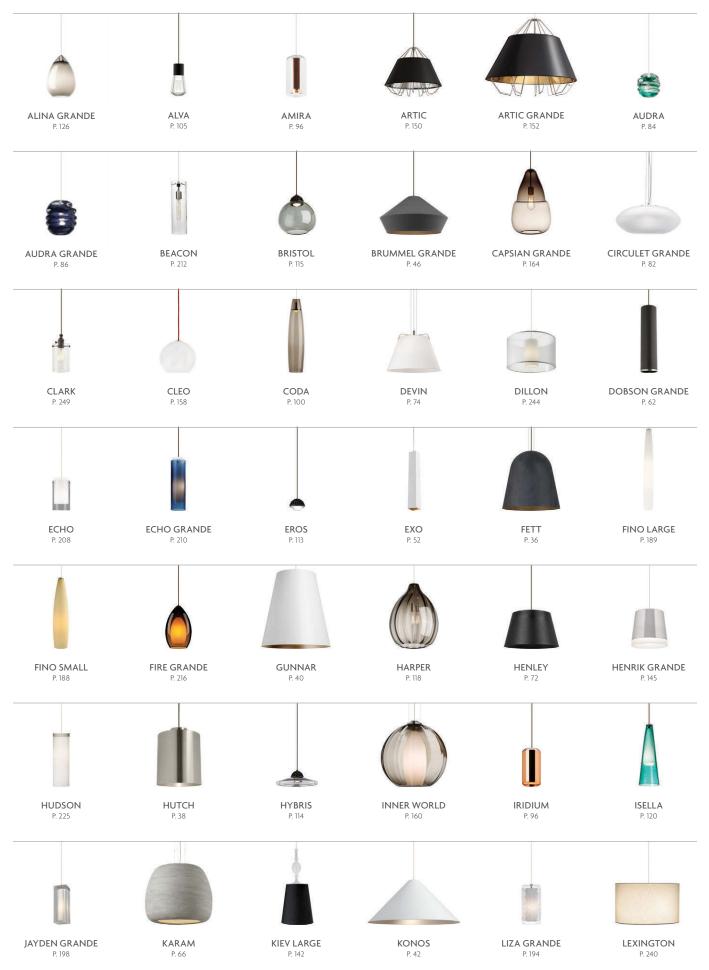


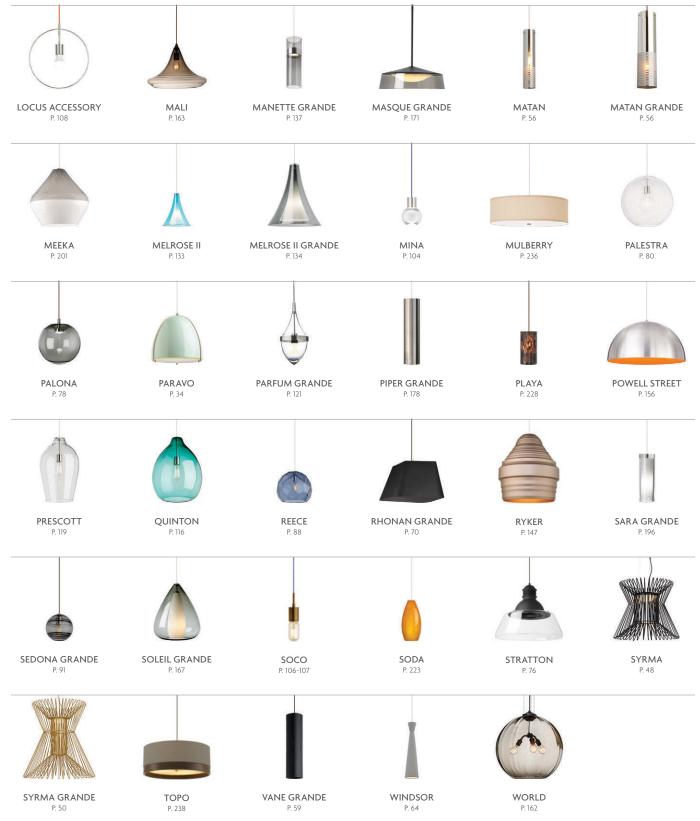

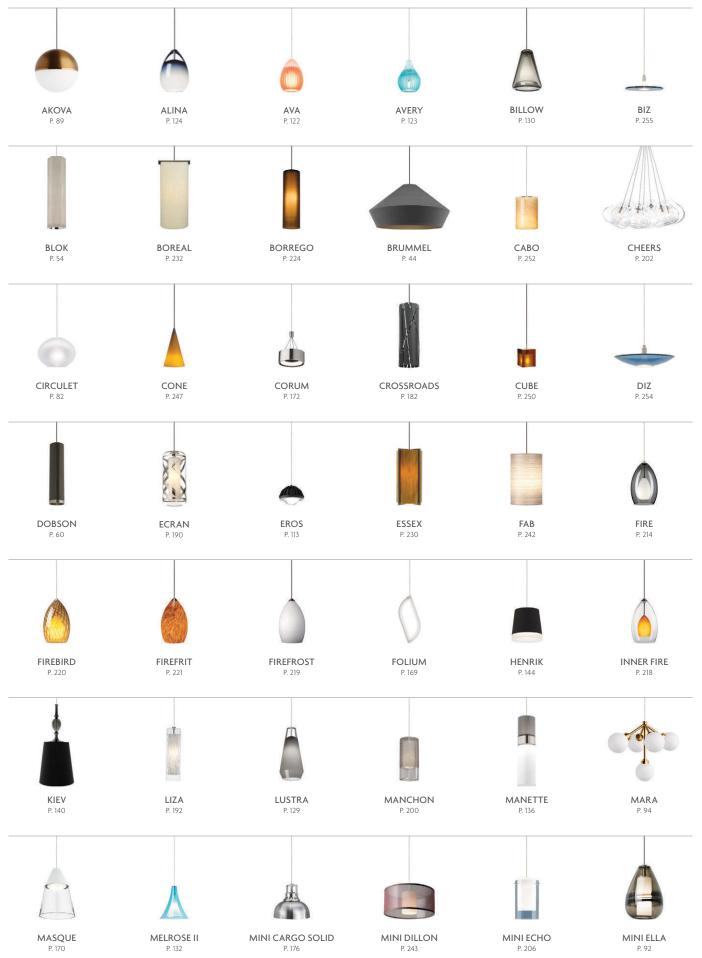

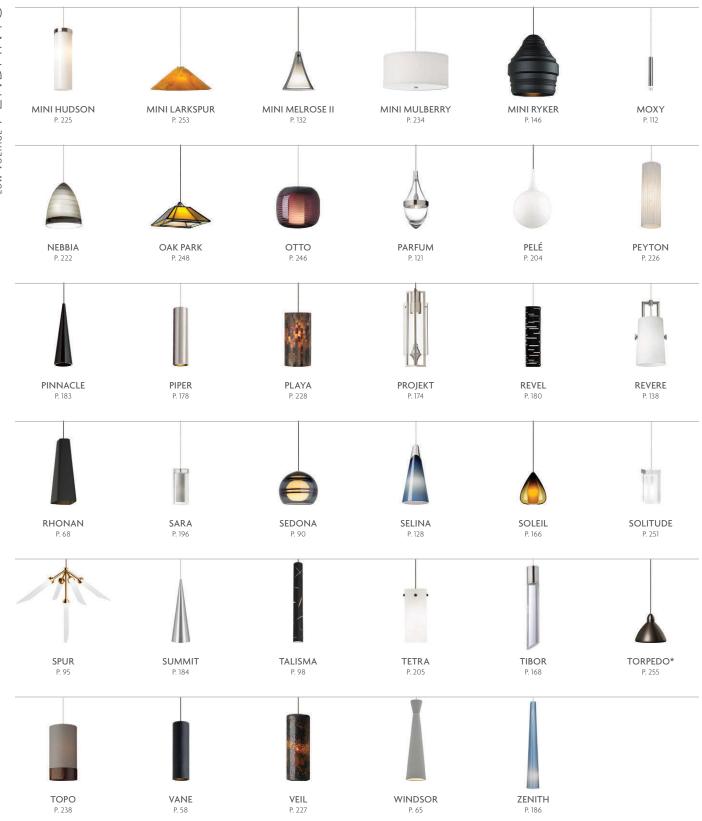

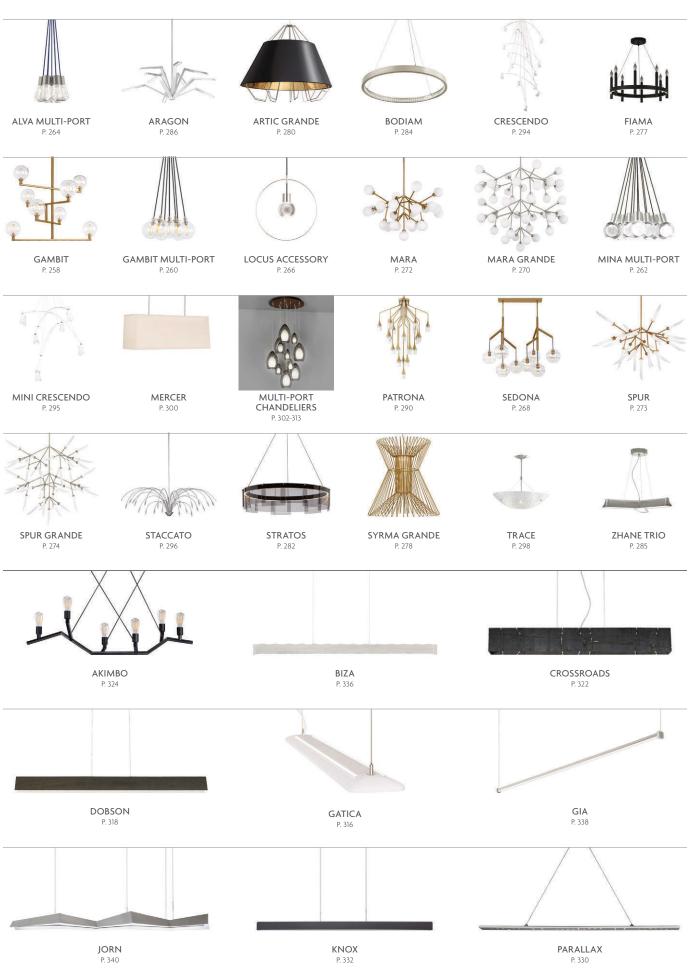

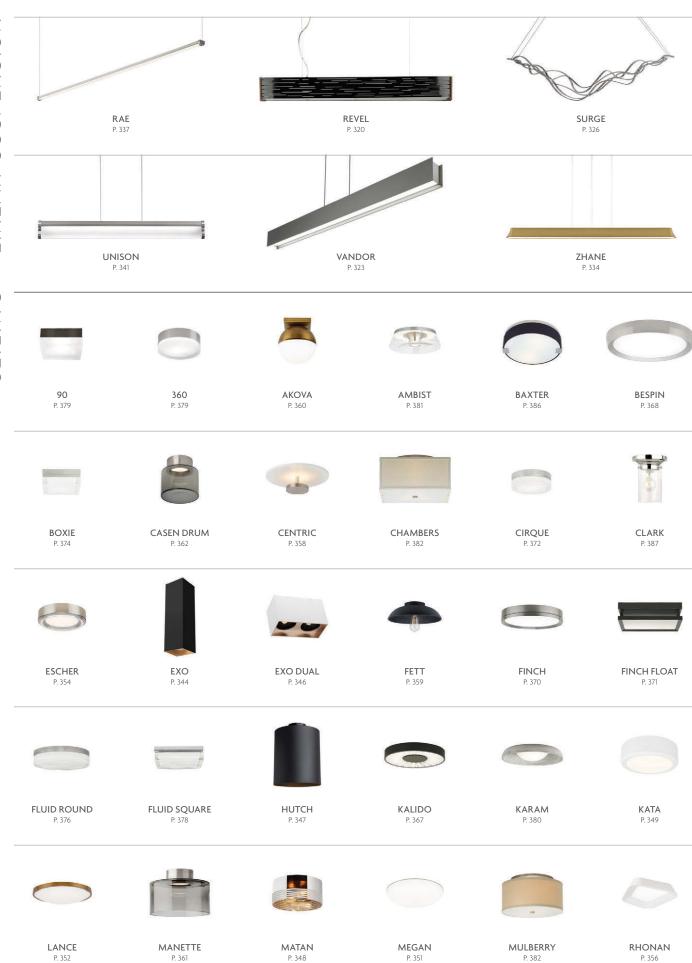













TEGAN P. 350

TOPO P. 384

TRACE P. 388

VANCE P. 353

WYNTER LINEAR P. 366

WYNTER ROUND P. 364



WYNTER SQUARE P. 365













ADERA

ADMIRAL SIMPLE

AKOVA

ALDEN P. 480

ARRIS P. 432

BASIS P. 434















BOREAL P. 522

BOWMAN 4 P. 426

BOWMAN 6 P. 426

BOXIE P. 458

BRIDGEPORT P. 504

CAFÉ P. 404





P. 521



CIRQUE P. 457



CLIFTON P. 502



CORONADO P. 518



CORVA BATH P. 482



CORVA P. 481



COSMO P. 462



COSMO 12/18 P. 460



CROSSROADS P. 485



CUBE P. 496



DOBSON P. 403



EBB P. 420



ECHO P. 514



ESSEX







FINN P. 468




FINN 24/36

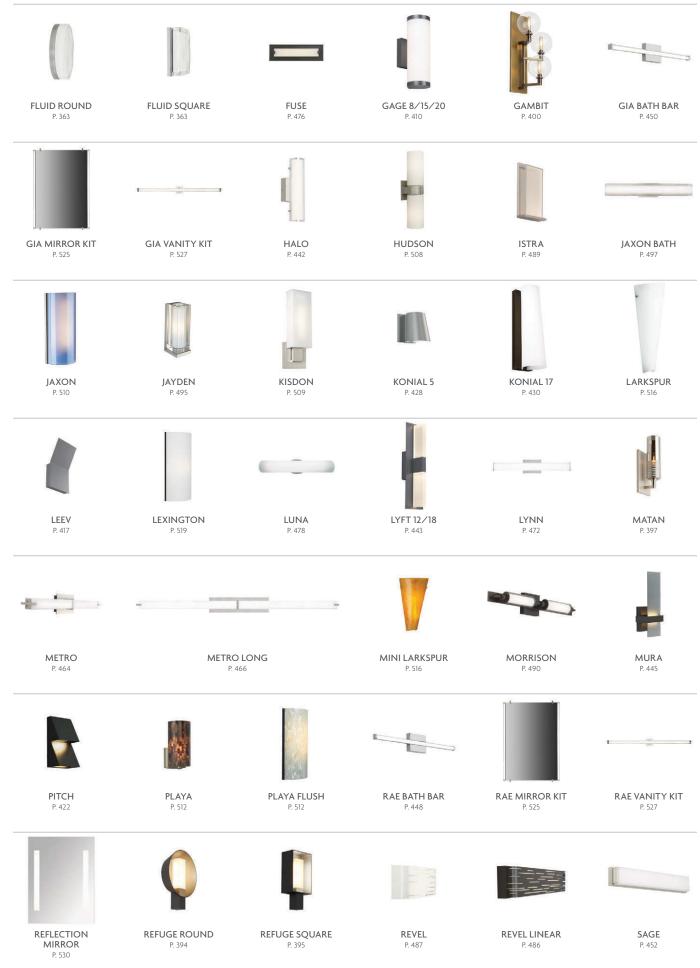



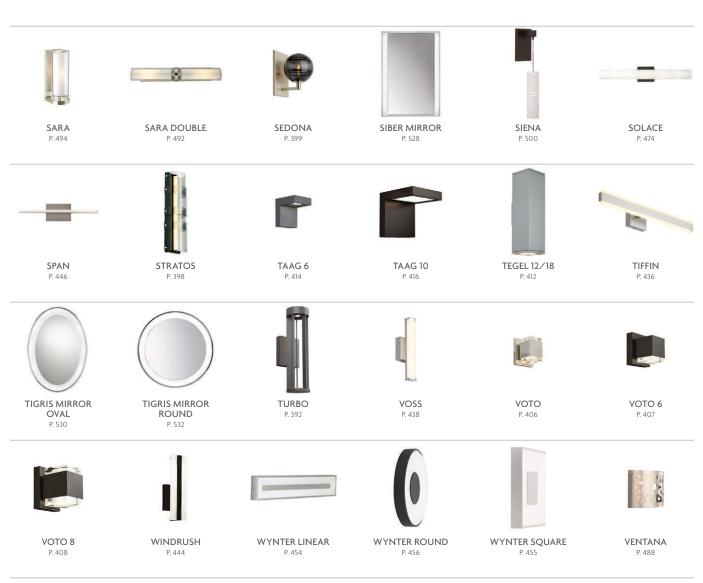



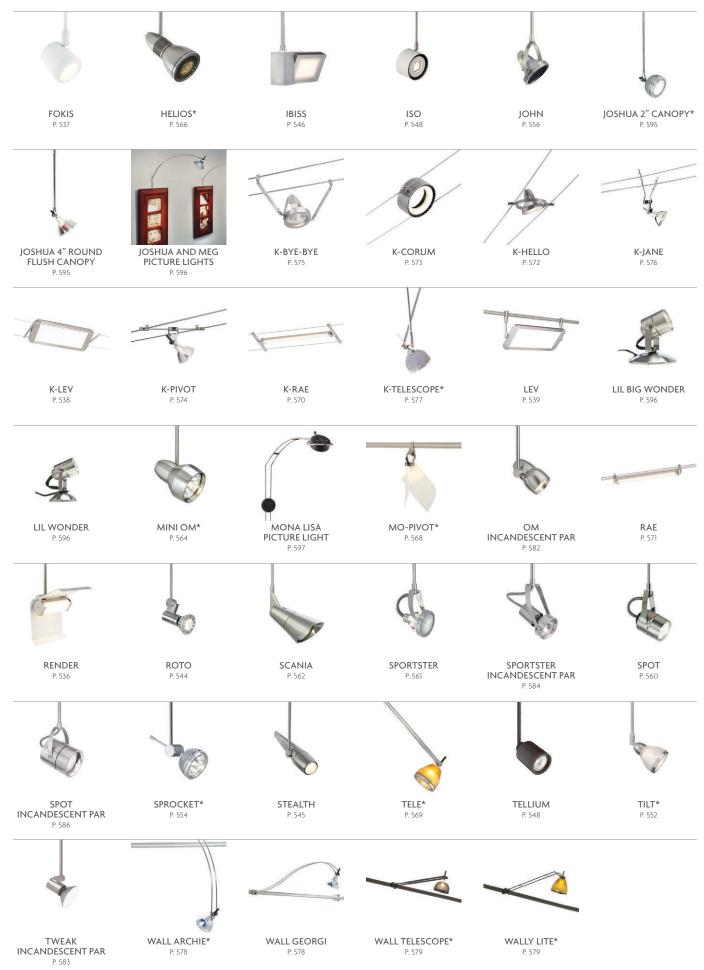

^{*} SHOWN ACCESSORIZED. SEE P. 588-593 FOR ACCESSORIES











BACKLIGHT SHIELD P. 592

BARNDOORS P. 593

BELL P. 591

BELLADONNA P. 591

CANOPY GOOF RING P. 588

CONE GLASS SHIELD P. 589













CONE ONYX SHIELD

EGGCRATE LOUVER

FLIGHT PAPER

INDUSTRIAL HANG STRAIGHT P. 588

LIL WOK P. 592

MR16 SNOOT













PRISM GLASS SHIELD

P. 590

ROUND GLASS SHIELD P. 589

SNAP LOUVER LENS HOLDER P. 592

SODA GLASS SHADE P. 590

SWAG HOOK P. 588

TINKERBELL WITH **INTEGRATED LENS** HOLDER







LIGHT BAR P. 633, 644-647




MICRO CHANNEL P. 633, 648-651



SLIMLINE P. 632, 638-641

OUR CUSTOMERS DESERVE THE ABSOLUTE BEST SUPPORT WE CAN OFFER. TO US, THIS MEANS PROVIDING ROBUST DIGITAL RESOURCES TO COMPLEMENT THE INDUSTRY-LEADING PRINTED LITERATURE WE STRIVE TO PRODUCE EACH YEAR. TODAY'S WORLD DEMANDS SIMPLE YET POWERFUL ONLINE TOOLS. OUR GOAL IS TO MAKE TECHLIGHTING.COM YOUR DESTINATION FOR THE ULTIMATE LIGHTING PRODUCT EXPERIENCE.

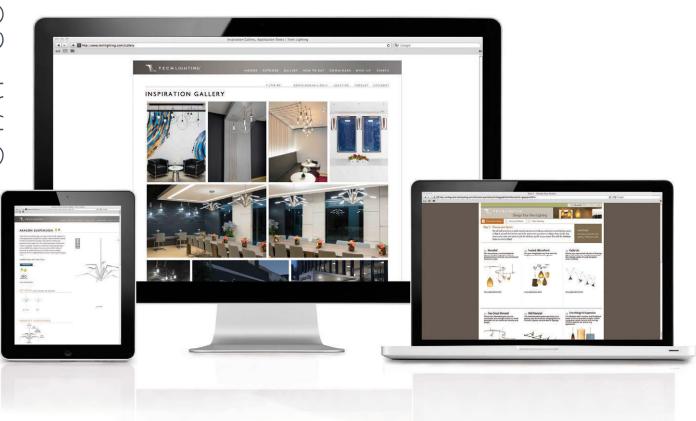

SYSTEMS GUIDE

provides detailed examples of how our systems solve complex lighting challenges, plus all the product info needed to specify your custom system

ENHANCED PRODUCT SEARCH

to easily sort products by category, name, color, new or LED

GROUP DOWNLOADS

to easily select multiple spec sheets and download them all at once

HOW TO BUY TOOLS

to quickly find local retail showrooms and online retailers who offer Tech Lighting

INSPIRATION GALLERY

including hundreds of hi-res images of our fixtures installed in a vast array of environments

DOWNLOADABLE HI-RES IMAGES

to share with others or use in professional layouts for advertising, design boards, specification proposals, etc.

GROWING SECTION OF PRODUCT VIDEOS

to learn about designers' inspirations and showcase key product features

SOCIAL MEDIA RESOURCES











TECH LIGHTING°

TECH LIGHTING NOW OFFERS PERFORMANCE ORIENTED,
SPECIFICATION GRADE OUTDOOR LIGHTING INCLUDING
WALL, CEILING, PATH, BOLLARD AND AREA LIGHT FIXTURES —
EACH FEATURING INNOVATIVE, IMPACTFUL DESIGN WITH
UNCOMPROMISING LEVELS OF QUALITY. ONLY OUR
OUTDOOR WALL & CEILING FIXTURES HAVE BEEN
INCLUDED IN THIS CATALOG, SO TO LEARN ABOUT
THE COMPLETE OUTDOOR LINE, LOCATE PRODUCT
SPECIFICATIONS, OR REQUEST A PRODUCT CATALOG,
PLEASE VISIT WWW.TECHLIGHTING.COM

When our designers and engineers focused their efforts to meet the unique needs of outdoor lighting, they ensured that the high level of craftsmanship, performance and value which specifiers have come to expect from Tech Lighting remained at the heart of the task. Whether designing outdoor lighting for public wayfinding, highlighting architectural or landscape features, or providing general illumination for safety after dark, Tech Lighting outdoor products will stand up to the most severe environmental conditions while providing state-of-the-art, long lasting and efficient LED light.

Every Tech Lighting outdoor product features each of these crucial features: marine-grade & corrosion-resistant finishes, impact-resistant & UV-stabilized acrylic diffusers, long-life LED lamping, IP65 ratings to ensure compliance to international commercial standards for water and dirt resistance, high lumen output optimized for outdoor applications, optional mounting solutions and durable die-cast aluminum construction.



TECH LIGHTING
OUTDOOR CATALOG
Visit techlighting.com/downloads
to download the catalog.





TECH LIGHTING®

FOR ALMOST 30 YEARS, TECH LIGHTING HAS BEEN THE INDUSTRY LEADER IN LOW-VOLTAGE (12V/24V) AND LINE-VOLTAGE (120V) LIGHTING SYSTEMS, PROVIDING COUNTLESS WAYS TO BRING AMBIENT, TASK AND DECORATIVE LIGHTING EXACTLY WHERE IT'S NEEDED VIA MODERN, STREAMLINED ALTERNATIVES TO STANDARD TRACK LIGHTING.



Initially introducing Kable Lite to the U.S. market in 1988,
Tech Lighting soon followed with the introductions of Monorail
(and it's FreeJack connectors) and T-TRAK. Today, we offer this full
array of flexible lighting systems, all of which have become industry
standards, enabling Tech Lighting to remain the leader in this
category with the vast majority of market share.

Each of these innovative systems serve as the infrastructure on which limitless lighting challenges can be solved when paired with compatible Tech Lighting pendants and directional spot heads. These versatile lighting systems create stunning solutions to fulfill your current design vision, as well as masterfully allow you to evolve the same lighting installation over time. Please reference P. 598-629 for inspiring ways to use Tech Lighting Systems to solve your lighting challenge.



TECH LIGHTING SYSTEMS ORDERING GUIDE

The Tech Lighting Systems Ordering Guide strives to provide you everything you need to know to select the right system from Tech Lighting and order the appropriate components to successfully meet the needs of your lighting design. Please feel free to request more of these printed guides from your local Tech Lighting Sales Rep or Authorized Showroom Retailer by visiting www.techlighting.com/HowToBuy



ONLINE SYSTEMS SUPPORT

Detailed information on each of Tech Lighting's Systems and their respective components is available online as well. Whether browsing or downloading the digital version of the Tech Lighting Systems Ordering Guide at www.techlighting.com/systems or utilizing our Online System Configurator at http://configurator.techlighting.com, assistance with creating a list of required system components is at your fingertips.









ELEMENT

by Tech Lighting®

TECH LIGHTING'S ELEMENT BRAND INCLUDES A COMPLETE LINE OF SPECIFIER-GRADE RECESSED DOWNLIGHTS WHICH ARE OFFERED AT EXTRAORDINARY VALUE AND BACKED BY THE BEST SERVICE LEVELS IN THE INDUSTRY. THE ELEMENT DOWNLIGHT LINE IS ALWAYS EXPANDING, SO TO FOLLOW THE ONGOING ADVANCES, LOCATE PRODUCT SPECIFICATIONS, OR REQUEST A PRODUCT CATALOG, PLEASE VISIT WWW.ELEMENT-LIGHTING.COM



Our thoughtful design & detailed manufacturing processes make certain what matters most to you, matters most to us:

Above the Ceiling Matters

Thoughtfully innovative engineering combined with high quality components and assembly methods ensure even the things you can't see are exceptional.

At the Ceiling Matters

Highly engineered housings deserve premium trims. Every ELEMENT trim is made of durable metal, then powder coated to ensure finish longevity.

Below the Ceiling Matters

Beautiful aesthetics cannot come at the expense of poor performance, so every ELEMENT fixture delivers beautiful light backed by the highest levels of support.



ELEMENT FULL LINE CATALOG

Visit element-lighting.com/downloads to download the catalog.

SMALL APERTURE RECESSED DOWNLIGHTS

Our uniquely deep offering of small aperture downlights includes flanged and flangeless ceiling appearances in a variety of housing types like Adjustable, Fixed, Wall Wash, Low Profile and Remodel – all of which provide a perfect balance of architectural appeal and optimal performance. Every downlight developed on a versatile platform designed to be customized with hundreds of combinations of LED boards, CCTs, CRIs, Outputs, Beam Spreads, Voltages, Dimming/Driver options, even traditional Halogen and CMH lamping options.

MULTIPLES & BUILD YOUR OWN MULTIPLES

ELEMENT has totally redefined Multiples, Twice. First, with our original Multiples line, which features a patented LED assembly which enables remarkable tool-free adjustment & locking while maintaining full center beam candle power, even at extreme tilt & rotation angles. Whether you select the open or trimmed ceiling appearance, adjustable spot, wall wash, or general illumination light modules, thoughtful design yields an uncommonly sleek look below the ceiling. Second, with our Build-Your-Own Multiples line, which provides lighting designers a completely new tool to quickly & easily achieve complex, never-before-seen downlighting arrays.



ELEMENT

by Tech Lighting®

TECH LIGHTING'S ELEMENT BRAND RECENTLY INTRODUCED MERGE™, AN INNOVATIVE, AWARD WINNING RECESSED LINEAR LIGHTING SYSTEM. THIS INCREDIBLY VERSATILE PRODUCT LINE TRANSCENDS TYPICAL GENERAL, TASK & ACCENT LIGHTING BY COMBINING THEM ALL IN A SINGLE, EASY TO CONFIGURE SYSTEM. TO LEARN ABOUT IT, VIEW SUGGESTED APPLICATIONS, OR REQUEST A PRODUCT CATALOG, PLEASE VISIT WWW.ELEMENT-LIGHTING.COM



UTILIZING THE CONCEALED LOW-VOLTAGE **BUS SYSTEM ENABLES YOU TO:**

Use one of our system integrated spot heads

Use a Merge FreeJack connector and anyTech Lighting low-voltage head or pendant.



MERGE Gimbal



MERGE Drop-down



Tech Lighting Pendant

(over 80 pendant options)

THE ELEMENT MERGE SYSTEM

ELEMENT Merge represents the marriage of a recessed linear LED system with a low voltage track lighting system. Whether being used to highlight architectural elements or deliver well-controlled general illumination, ELEMENT Merge creates recessed channels of uniform, glare-free LED light while offering stunning design flexibility.

Enhancing the utility of this beautifully integrated linear lighting system, spot heads or pendants can be added directly into the channel at any point along the concealed, patent-pending low-voltage bus (track) system for simultaneous accent or task illumination. Spot heads or pendants can be controlled completely separately from the linear channel for separate dimming and on / off control of either the channel or the heads.

ELEMENT Merge linear channels can be designed to make same-plane 90° turns or perpendicular transitions from ceiling to wall for enhanced architectural interest.



ELEMENT FULL LINE CATALOG

Visit element-lighting.com/downloads to download the catalog.

Tech Lighting

Head



ELEMENT

by Tech Lighting®

ELEMENT REFLECTIONS REDEFINES RECESSED LIGHTING
AT A FUNDAMENTAL LEVEL BY ALLOWING LED DOWNLIGHTS
TO BECOME AN ESSENTIAL DECORATIVE COMPONENT OF
A WELL-COMPOSED, MULTI-LAYERED LIGHTING DESIGN.
IDEAL FOR RESIDENTIAL, HOSPITALITY, OR SENIOR LIVING
ENVIRONMENTS, ELEMENT REFLECTIONS RECESSED
DOWNLIGHTS DELIVER PRISTINE, GLARE-FREE, INDIRECT
LED ILLUMINATION WITH DESIGNER FLAIR.

ELEMENT Reflections unique decorative domes, molded with exquisitely embossed design details, subtly accent architectural themes with beautiful and abundant LED general illumination while creating a soft ceiling glow. Available in 5", 8" and 12" diameters, Reflections domes are recessed into the ceiling plane and act as reflectors to a completely hidden ring of upward-firing LEDs that deliver perfectly controlled, fully dimmable indirect illumination.

ELEMENT Reflections can be a sole source of glare-free general illumination or can be used in combination with other lighting fixtures. When combined with more traditional ELEMENT architectural recessed downlights that deliver high performance, angle adjustment, beam options, programmability and a myriad of functional light design attributes, ELEMENT Reflections enhances and complements the overall lighting design of a given space.



ELEMENT REFLECTIONS BROCHURE

Visit element-lighting.com/downloads to download the catalog.



BLOOM

brings a touch of the natural world into harmony with transitional to contemporary room decors



DUNE

creates concentric rings of reflected light reminiscent of Art Deco modern design themes



FLEUR

eimagines the traditional Fleur di Lis as a classically stylized accent to any lighting design



SKYE

lives simply unadorned, where pure, glare-free, indirect illumination is the absolute requirement



TORUS

transforms subtle three-dimensional geometry into the perfect accent for a wide range of aesthetics



GATICA

TECH LIGHTING ALSO OFFERS OUR GATICA MODULAR LED SYSTEM WHICH SMARTLY COMBINES AIMABLE GENERAL ILLUMINATION, WALL WASH AND SPOT LIGHTING, WITH INTEGRATED CONTROLS AND EMERGENCY BACK-UP, IN A HIGHLY CONFIGURABLE SYSTEM THAT BEAUTIFULLY INTEGRATES INTO ITS SURROUNDINGS. THE GATICA PRODUCT LINE IS ALWAYS EXPANDING, SO TO FOLLOW THE ONGOING ADVANCES, LOCATE PRODUCT SPECIFICATIONS, OR REQUEST A PRODUCT CATALOG, PLEASE VISIT WWW.TECHLIGHTING.COM/GATICA

GATICA can serve as the sole or majority light source throughout spaces requiring general illumination, wall washing, task illumination or all three. The system's inherent versatility and multiple mounting options are particularly suited to serve industries such as retail, grocery, corporate office, health care, education, hospitality, museum, library and gallery among others.

GATICA is the result of tremendous collaboration between designers, engineers and technology partners. Throughout the design process, we focused on how GATICA could contribute to the overall design aesthetic of a space including the physical form factor as well as the light it produces.

The result is a system which makes a bold design statement while simultaneously unifying with the surrounding environment. The modular nature of GATICA's patent pending tiltable panels, spots and controls allows designers to maximize the impact of every lumen the system produces by putting light exactly where it is needed, exactly when it is needed. In short, we have developed a tool for designers to transform a space by creating precisely controlled layers of light from a single system, eliminating the need to combine unrelated lighting systems to avoid a disjointed look.



GATICA FULL LINE CATALOG

Visit techlighting.com/GATICA/downloads to download the catalog.





<












A precisely molded fiberglass shade offered in five dramatic colors including vivid tangerine, invigorating mint, deep ocean blue, arctic white and gloss black is encased within a die-cast aluminum exostructure which supports the lower diffusor of frosted plate glass.



LINE-VOLTAGE

□ 120 volt 53 watt, medium base halogen A19 lamp / Dimmable with standard incandescent dimmer

-i- 120 volt 19 watt, 1680 delivered lumen, 2700K, medium base LED A21 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

12 feet of field-cuttable cloth cord

T24 LED includes Title 24 Compliant lamp

700TDPRVP SHADE COLOR / HARDWARE FINISH

BB GLOSS BLACK / MATTE BLACK
WW GLOSS WHITE / SATIN NICKEL

GS MINT/SATIN NICKEL
US BLUE/SATIN NICKEL
AS TANGERINE/SATIN NICKEL


LAMP

INCANDESCENT 120V -LED927 A21 LED 90 CRI 3000K 120V





An instant classic, this significantly scaled pendant blends its characteristic dome, deep weathered zinc finish and signature texture, created during a meticulous natural sand casting technique, to project a monolithic presence.

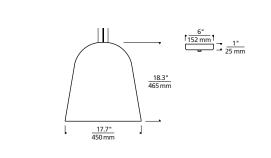

LINE-VOLTAGE

120 volt 150 watt, medium base G40 lamp / Dimmable with standard incandescent dimmer

-i- 120 volt 15 watt, 900 delivered lumen, 3000K, medium base LED G40 lamp $\scriptstyle /$ Dimmable with LED compatible dimmer

SPECIFICATIONS

12 feet of field-cuttable cloth cord

COMPLEMENTARY PRODUCT

Ceiling / P. 359, Wall / P. 396

700TDFETP SHADE COLOR / HARDWARE FINISH LAMP E WEATHERED ZINC INCANDESCENT 120V










MATTE BLACK

BRUSHED ALUMINUM

Clean, sharp lines harmonize with the soft matte and raw aluminum finishes of this scaled-up stamped metal shade. Choice of low and high output LED modules offer flexibility for use in both modern residential or commercial applications.



LINE-VOLTAGE

-h- High Output: 120-277 universal voltage, 48 watt, 1807 delivered lumen, 2700 or 3000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

Low Output: 120 volt 18 watt, 1392 delivered lumen, 2700 or 3000K LED module / Dimmable with low-voltage electronic dimmer only

SPECIFICATIONS

60 inches of variable rigid stems with coordinating finish

₹ 25° and 40° field changeable optics

T24 LED Title 24 Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Ceiling / P. 346

700TDHTCP BEAM SPREAD

25 25°

40 40°

SHADE COLOR / HARDWARE FINISH A BRUSHED ALUMINUM
B MATTE RI ACV

W MATTE WHITE

LAMP -LEDLO927 -LEDHI927 -LEDLO930

LED LO-OUTPUT 90 CRI 2700K 120V LED HI-OUTPUT 90 CRI 2700K 120V-277V UNV

-LEDLO930-277 LED LO-OUTPUT 90 CRI 3000K 277V

LED LO-OLITPLIT 90 CRI 3000K 120V LED HI-OUTPUT 90 CRI 3000K 120V-277V UNV -LEDLO927-277 LED LO-OUTPUT 90 CRI 2700K 277V






Grand scale tempered by elemental geometry define this architectural spun metal pendant.

Each shade is hand painted with flawlessly smooth matte exterior finishes

while the interior is highlighted in beautiful semi-gloss metallic hues.

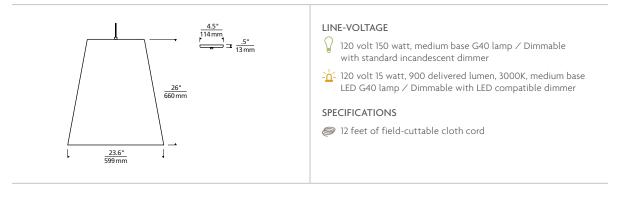

700TDGUNP SHADE COLOR (OUTER / INNER) / HARDWARE FINISH LAMI


BG BLACK/SATIN GOLD/BLACK
WS WHITE/SATIN HAZE/WHITE

INCANDESCENT 120V -LED930 G40 LED 80 CRI 3000K 120V





The simple cone is exaggerated to voluminous scale in this architecturally significant spun metal pendant. Each shade is hand painted with flawlessly smooth matte exterior finishes while the interior is highlighted in beautiful semi-gloss metallic hues.

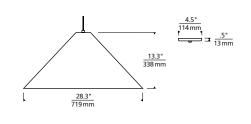

LINE-VOLTAGE

120 volt 150 watt, medium base G40 lamp / Dimmable with standard incandescent dimmer

120 volt 15 watt, 900 delivered lumen, 3000K, medium base LED G40 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

12 feet of field-cuttable cloth cord

700TDKONP SHADE COLOR (OUTER/INNER)/HARDWARE FINISH

BG BLACK/SATIN GOLD/BLACK WS WHITE/SATIN HAZE/WHITE

-LED930 INCANDESCENT 120V -LED930 G40 LED 80 CRI 3000K 120V





Clean, sharp lines harmonize with the soft, matte finish of this mid-century inspired spun metal shade.



LOW-VOLTAGE

Û Low-Voltage, 50 watt halogen MR16 lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Pendant / P. 46

700	SYSTEM B		BML	SHADE COLOR	FINISH	LAMP		
	KL MP MO	FREEJACK KABLE LITE MONOPOINT* MONORAIL TWO-CIRCUIT MO	NORAIL	Y MATTE CHARCOAL GRAY W MATTE WHITE	Z ANTIQUE BRONZE** C CHROME S SATIN NICKEL		12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K	

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE










Clean, sharp lines harmonize with the soft, matte finish of this large scale, impactful, mid-century inspired spun metal shade.



LINE-VOLTAGE

120 volt 60 watt, medium base G40 globe lamp / Dimmable with standard incandescent dimmer

-h- 120 volt 19 watt, 1680 delivered lumen, 2700K, medium base LED A21 lamp / Dimmable with an LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 44

700TI	DBMLGP	SHADE COLOR

Y MATTE CHARCOAL GRAY W MATTE WHITE

HARDWARE FINISH

B BLACK
S SATIN NICKEL


INCANDESCENT 120V -LED927 A21 LED 90 CRI 2700K 120V

W WHITE





Dozens of machined metal rods are duplicated and painstakingly fastened at perfectly spaced intervals to form an incredible, multidimensional shade. At its core, light emanates from its smoothly diffused LED source to illuminate this significant piece inspired by mid-century modern design.



LINE-VOLTAGE

- 17 watt, 881 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic, triac or 0-10v dimmer

SPECIFICATIONS

Matte Black Finish: 12 feet of field-cuttable black cloth cord Satin Gold Finish: 12 feet of field-cuttable cord

COMPLEMENTARY PRODUCT

Pendant / P. 50, Chandelier / P. 278

700TDSYRP SHADE COLOR / HARDWARE FINISH LAM


B MATTE BLACK
G SATIN GOLD

-LED930 LED 90 CRI 3000K 120V





Dozens of machined metal rods are duplicated and painstakingly fastened at perfectly spaced intervals to form an incredible, multidimensional shade. At its core, light emanates from its smoothly diffused LED source to illuminate this significant piece inspired by mid-century modern design.



LINE-VOLTAGE

-i- 17 watt, 881 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic, triac or 0-10v dimmer

SPECIFICATIONS

Matte Black Finish: 12 feet of field-cuttable black cloth cord Satin Gold Finish: 12 feet of field-cuttable cord

COMPLEMENTARY PRODUCT

Pendant / P. 48, Chandelier / P. 278

700TDSYRGP SHADE COLOR / HARDWARE FINISH

B MATTE BLACK
G SATIN GOLD


LAMP

-LED930 LED 90 CRI 3000K 120V





A simple cuboid yields the ultimate in minimalist form and conceals the specification-grade, multifunction performance downlight within. Output is harnessed by field changeable optics and precisely controlled by 0°-30° tool-free tilt, while choice of recessed trims adds a custom touch.

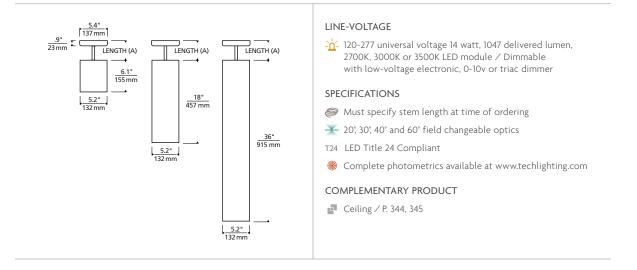


700TDEXOP	SHADE HEIGHT	STEM LENGTH (A)	BEAM SPREAD	SHADE COLOR / HARDWARE FINISH	TRIM FINISH	LAMP
	6 6.1" 18 18" 36 36"	12 12" 24 24" 36 36" 48 48"	20 20° 30 30° 40 40° 60 60°	B MATTE BLACK W MATTE WHITE	B BLACK W WHITE G GOLD HAZE	-LED927 LED 90 CRI 2700K 120V 277 UNV -LED930 LED 90 CRI 3000K 120V 277 UNV -LED935 LED 90 CRI 3500K 120V 277 UNV





The classic metal cylinder undergoes an art deco inspired interpretation in this fresh new design. Each hexagonal shade is offered in five on-trend finishes and features a removable lower accessory that translates the six-sided shade to a circular diffusor.



LOW-VOLTAGE

Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 6 watt, 435 delivered lumen, 3000K, replaceable SORAA® LED MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

T24 LED includes Title 24 Compliant lamp

700	SYSTI	SYSTEM B		SYSTEM BLK SIZE SHADE CO		ADE COLOR / HARDWARE FINISH	LAMP		
	FJ	FREEJACK	9	5 5	SMALL	RR	AGED BRASS / AGED BRASS**		12 VOLT HALOGEN
	MP	MONOPOINT*	L		LARGE	ZZ	ANTIQUE BRONZE / ANTIQUE BRONZE	-24	24 VOLT HALOGEN
	MO	MONORAIL				BS	MATTE BLACK / SATIN NICKEL	-LED930	12 VOLT LED 90 CRI 3000K
	MO2	TWO-CIRCUIT MOI	NORAIL			WS	MATTE WHITE / SATIN NICKEL		
						SS	SATIN NICKEL / SATIN NICKEL		

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** AGED BRASS FINISH INCLUDES SATIN NICKEL SYSTEM HARDWARE





Artisan molded glass treated with a special mirror like coating creates two stunning visual effects - when illuminated, the partially opaque shade provides a glimpse of the light source within. When not illuminated, the shade resembles molten metal.

LINE-VOLTAGE

-h- 120 volt 2 watt, 155 delivered lumen, 2200K or 2700K, E12 base LED vintage tubular lamp / Dimmable with LED compatible or triac dimmer


SPECIFICATIONS

6 feet of field-cuttable cloth cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Ceiling / P. 347, Wall / P. 397



700TDMTNP SHADE COLOR

MC METALLIC CHROME

HARDWARE FINISH

S SATIN NICKEL

LAMP

T6 LED 90 CRI 2200K 120V -LED927 T6 LED 90 CRI 2700K 120V



Artisan molded glass treated with a special mirror like coating creates two stunning visual effects - when illuminated, the partially opaque shade provides a glimpse of the Edison-style lamping within. When not illuminated, the shade resembles molten metal.

LINE-VOLTAGE

-h- 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage radio lamp / Dimmable with LED compatible or triac dimmer


SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Ceiling / P. 347, Wall / P. 397



700TDMTNGP COLOR

HARDWARE FINISH

LAMP

-LED922 T14 LED 90 CRI 2200K 120V **-LED927** T14 LED 90 CRI 2700K 120V





The ubiquitous metal cylinder undergoes an intriguing upgrade featuring a thick cast aluminum shade and a new signature texture created during a meticulous natural sand casting process. The texture is further accentuated by its deep weathered zinc finish.



LOW-VOLTAGE

Low-Voltage, 50 watt halogen MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

-M- Low-Voltage, 6 watt, 435 delivered lumen, 3000K, replaceable SORAA® LED MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable


T24 LED includes Title 24 Compliant lamp

700	SYSTEM		VNE	SHADE COLOR		FI	NISH	LAMP	
	FJ MP MO MO2	FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT MO	ONORAIL	E	WEATHERED ZINC	S	SATIN NICKEL	-24 -LED930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH



The ubiquitous large metal cylinder undergoes an intriguing upgrade featuring a thick cast aluminum shade and a new signature texture created during a meticulous natural sand casting process. The texture is further accentuated by its deep weathered zinc finish.



LINE-VOLTAGE

120 volt 39 watt, medium base halogen PAR 20 lamp / Dimmable with standard incandescent dimmer

120 volt 8 watt, 470 delivered lumen, 3000K, medium base LED PAR 20 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cloth cord

T24 LED includes Title 24 Compliant lamp

 700TDVNEGP
 SHADE COLOR / HARDWARE FINISH
 LAMP

 E
 WEATHERED ZINC
 INCANDESCENT 120V

 -LED930
 PAR 20 LED 90 CRI 3000K 120V



A cylindrical metal shade is treated with a special coating to replicate the warm look and texture of real woods including oak, ash or chestnut, then finished with a satin nickel detail for a sophisticated touch.



LOW-VOLTAGE

Low-voltage, 50 watt halogen MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 62, Linear Suspension / P. 318, Wall / P. 403


700	SYSTEM DBS		DBS	SHADE FINISH		FI	NISH	LAMP	LAMP		
	FJ	FREEJACK		N	BROWN CHESTNUT	S	SATIN NICKEL		12 VOLT HALOGEN		
	MP	MONOPOINT*		Υ	WEATHERED GRAY OAK			-24	24 VOLT HALOGEN		
	MO	MONORAIL		Α	WHITE ASH			-LED930	12 VOLT LED 90 CRI 3000K		
	MO2	TWO-CIRCUIT MO	NORAII								

 $[\]star$ includes 4" round flush canopy in coordinating finish





A large cylindrical metal shade is treated with a special coating to replicate the warm look and texture of real woods including oak, ash or chestnut, then finished with a sophisticated satin nickel detail.

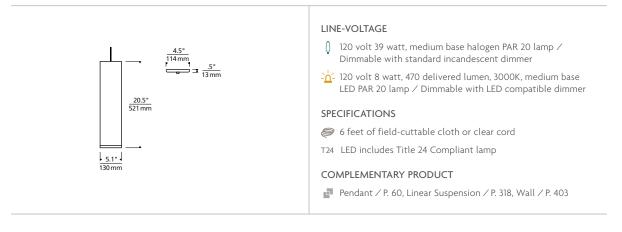


700TDDBSGP SHADE FINISH HARDWARE FINISH / CORD COLOR LAMP

N BROWN CHESTNUT B BLACK / BLACK INCANDESCENT 120V
Y WEATHERED GRAY OAK S SATIN NICKEL / CLEAR - LED930 PAR 20 LED 90 CRI 3000K 120V
W WHITE ASH
W WHITE





The dual-tapered, elongated silhouette of the shade inspired by mid-century modern design creates alluring dimension while the choice of painted metal finishes, satin nickel or natural cast concrete offer varying texture options.



LINE-VOLTAGE

🗓 120 volt 39 watt, medium base halogen PAR 20 lamp / Dimmable with standard incandescent dimmer

120 volt 8 watt, 470 delivered lumen, 3000K, medium base LED PAR 20 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable black cloth cord

T24 LED includes Title 24 Compliant lamp

700TDWDS SHADE COLOR / CANOPY FINISH

BB BLACK / BLACK
CB CONCRETE / BLACK


SB SATIN NICKEL / BLACK
WB WHITE / BLACK

LAMP

INCANDESCENT 120V -LED930 PAR 20 LED 90 CRI 3000K 120V



The dual-tapered, elongated silhouette of the shade inspired by mid-century modern design creates alluring dimension while the choice of painted metal finishes, satin nickel or natural cast concrete offer varying texture options.



LOW-VOLTAGE

- Low-Voltage, 50 watt halogen MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- Low-Voltage, 6 watt, 435 delivered lumen, 3000K, replaceable SORAA® LED MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

Ø 6 feet of field-cuttable cable / All finishes ship with Satin Nickel cord

T24 LED includes Title 24 Compliant lamp

700	SYST	EM	WDS SH	ADE COLOR	FINISH	LAMP	
	MP MO	FREEJACK KABLE LITE MONOPOINT* MONORAIL TWO-CIRCUIT MO	C S W	CONCRETE	Z ANTIQUE BRONZE** C CHROME S SATIN NICKEL	-24 -LED930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE








BLACK / BLACK SMALL

Unexpected scale and extraordinary texture join forces to define this incredible pendant. Made entirely of ceramic material, the inner and outer walls of each over-sized shade are textured and painted by hand to create the rough and inherently unique appearance.

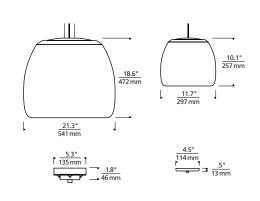

LINE-VOLTAGE

Small: 120 volt 72 watt, medium base A19 lamp / Dimmable with standard incandescent dimmer

Large: 120 volt 150 watt, G40 globe lamp / Dimmable with standard incandescent dimmer

- Small & Large: 120 volt 19 watt, A21 LED lamp / Dimmable with an LED compatible dimmer

SPECIFICATIONS

Small: 6 feet of field-cuttable cloth cord to match finish selection Large: 12 feet of field-cuttable cloth cord to match finish selection

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Ceiling / P. 380

700TDKRMP	SIZE	SHADE COLOR / HARDWARE FINISH	LAMP*	
	S SMALL	B BLACK / BLACK		INCANDESCENT 120V
	L LARGE	C CONCRETE / WHITE	-LED927	A21 LFD 90 CRI 2700K 120V










A modern, asymmetric, stamped metal shade undergoes a unique treatment process to add a natural rough cast texture, then is painted with your choice of matte finish to yield a dramatic linear form.



LOW-VOLTAGE

Û Low-Voltage, 50 watt halogen MR16 lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 70, Ceiling / P. 356


700	SYSTEM RHN		RHN o	OUTER / INNER SHADE COLOR			NISH	LAMP		
	FJ	FREEJACK	BE		TEXTURED BLACK / BLACK		ANTIQUE BRONZE**	24	12 VOLT HALOGEN	
	KL MP	KABLE LITE MONOPOINT*	VV	W	TEXTURED WHITE / WHITE	_	CHROME*** SATIN NICKEL	-24 -LEDS930	24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K	
		MONORAIL***								
	MO2	TWO-CIRCUIT MONO	RAIL***							

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



TEXTURED BLACK / BLACK

An asymmetric, stamped metal shade undergoes a unique treatment process to add a natural rough cast texture, then is painted with your choice of matte finish to yield a dramatically modern pendant in unexpected scale.



LINE-VOLTAGE

120 volt 75 watt, medium base A19 lamp with white globe diffuser / Dimmable with standard incandescent dimmer

-i- 120 volt 19 watt, 1680 delivered lumen, 2700K, medium base LED A21 lamp with white globe diffuser / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cloth cord to match hardware finish

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 68, Ceiling / P. 356

700TDRHNGP	SHADE COLOR / HARDWARE FINISH
------------	-------------------------------

BB TEXTURED BLACK / BLACK WW TEXTURED WHITE / WHITE

LAMP

INCANDESCENT 120V -LED927 A21 LED 90 CRI 2700K 120V










TEXTURED BLACK / BLACK

This large spun metal shade lures the eye in with its unique rough cast texture finish. Its contemporary yet neutral style and scale make it perfect for commercial and residential applications alike.



LINE-VOLTAGE

120 volt 75 watt, medium base A19 lamp with white globe diffuser / Dimmable with standard incandescent dimmer

-h- 120 volt 19 watt, 1680 delivered lumen, 2700K, medium base LED A21 lamp with white globe diffuser / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cloth cord

T24 LED includes Title 24 Compliant lamp

700TDHNLP SHADE COLOR / HARDWARE FINISH

BB TEXTURED BLACK / BLACK WW TEXTURED WHITE / WHITE

LAMP


INCANDESCENT 120V -LED927 A21 LED 90 CRI 2700K 120V





POLISHED NICKEL / WHITE

In an unexpected twist on the classic table lamp silhouette, a large hand-blown, frosted glass shade is finished with tailored metal details.



LINE-VOLTAGE

120 volt 150 watt medium base G40 globe lamp

120 volt 15 watt, 900 delivered lumen, 3000K, medium base G40 LED lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS


12 feet of field-cuttable white cloth cord and matching canopy

700TDDEVP	COLOR	FRAME / CANOPY FINISH	LAMP	
	W WHITE	NW POLISHED NICKEL / WHITE		INCANDESCENT 120V





The ultimate marriage of industrial design and modern elegance starts with a large-scale, hand-blown Italian glass shade and ends with a decorative metal housing garnished with a riveted canvas detail. The thoughtfully hidden light source leaves the beautiful glass uninterrupted.

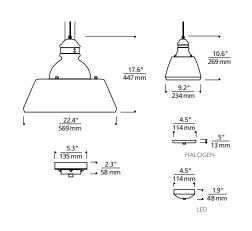

LINE-VOLTAGE

☐ Small: 120 volt 39 watt, medium base halogen PAR 20 lamp /
Dimmable with low-voltage electronic dimmer

Large: 120 volt 60 watt, medium base halogen PAR 30 lamp $\!\!\!/$ Dimmable with low-voltage electronic dimmer

-i Small: 15 watt, 260 delivered lumen, 2700K or 3000K field replaceable LED module / Dimmable with low-voltage electronic dimmer

Large: 22 watt, 500 delivered lumen, 2700K or 3000K field replaceable LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

6 feet of field-cuttable cloth cord to match finish selection

Complete photometrics available at www.techlighting.com

700TDSTNP	SIZE	SHADE COLOR	FINISH	LAMP	LAMP		
	S SMALL	C CLEAR	B BLACK	-PAR	HALOGEN PAR 120V		
	L LARGE	K SMOKE	Y GRAY	-LED27	LED 80 CRI 2700K 120V		
				-LED27-277	LED 80 CRI 2700K 277V		
				-LED30	LED 80 CRI 3000K 120V		
				-LED30-277	LED 80 CRI 3000K 277V		










This large-scale pendant flawlessly blends the art of beautiful hand-blown glass, the science of highly engineered mechanical components, and the technology of warm color dimming LED to create an elegantly simple, yet dramatic fixture.



LINE-VOLTAGE

Clear & Smoke Glass: 120 volt 60 watt, S21 Squirrel Cage lamp / Dimmable with standard incandescent dimmer

White Glass: 120 volt 53 watt, medium base halogen A19 lamp / Dimmable with standard incandescent dimmer

Clear & Smoke Glass: 9 watt, 684 delivered lumen, 3000K-2200K warm color dimming LED module / Dimmable with low-voltage electronic dimmer

Clear & Smoke Glass: 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED Squirrel Cage lamp $\scriptstyle /$ Dimmable with LED compatible or triac dimmer

White Glass: 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

6 feet of field-cuttable cable


T24 LED922 and LED927 include Title 24 Compliant lamp

700 SYSTEM PI	NP COLOR	HARDWARE FINISH	LAMP	
TD MONOPOINT TT T-TRAK	C CLEAR K SMOKE W WHITE*	R AGED BRASS S SATIN NICKEL		INCANDESCENT / HALOGEN 120V LED 90 CRI WARM COLOR DIMMING 3000K-2200K 120V ST19 LED 90 CRI 2200K 120V
				ST19 LED 90 CRI 2700K 120V





Venetian artisans work with white glass rods to meticulously create a tightly wound spiral effect within clear glass, then leverage decades of craftsmanship to create a large, perfectly round globe that is simply stunning.



LINE-VOLTAGE

2 120 volt 60 watt, G40 globe lamp / Dimmable with standard incandescent dimmer


14.5 watt, 1,000 net lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

700TDPALP	COLOR		ANOPY FINISH	LAMP		
	OC OPAL/CLEAR	S	S SATIN NICKEL INCANDESCENT 120V		INCANDESCENT 120V	
		W	WHITE	-LEDWD	LED 90 CRI WARM COLOR DIMMING 3000K-2200K 120V	
				LEDOSO	LED 00 CBI 2000K 120V	



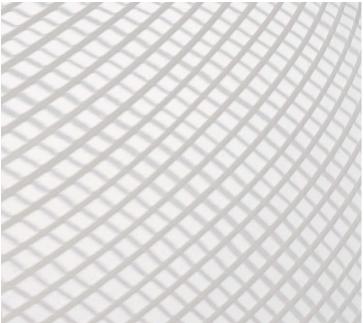





Dozens of shallow grooves are hand-carved into the finely sandblasted surface of an elliptical glass shade. When illuminated, the warm color dimming LED interacts with the rich textures to create a glowing aesthetic.

LOW-VOLTAGE

Û Low-Voltage, 35 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable



700	SYSTEM		SYSTEM		CIR	COLOR	FINISH	LAMP	
	FJ	FREEJACK KABLE LITE		W WHITE (CARVED ETCHED)	Z ANTIQUE BRONZE** C CHROME	24	12 VOLT HALOGEN 24 VOLT HALOGEN		
	KL MP	MONOPOINT*			S SATIN NICKEL	-24 -LEDS930	12 VOLT LED 90 CRI 3000K		
	MO	MONORAIL							
	MO2	TWO-CIRCUIT MON	IORAIL						

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH



Hundreds of shallow grooves are hand-carved into the finely sandblasted surface of a large, elliptical glass shade. When illuminated, the warm color dimming LED interacts with the rich textures to create a glowing aesthetic.


LINE-VOLTAGE

-ir- 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with LED compatible dimmer

14.5 watt, 600 delivered lumen, 3000K-2200K warm color dimming LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS


12 feet of field-cuttable cable



700TDCIRGP	COLOR	HARDWARE FINISH	LAMP
	W WHITE (CARVED ETCHED)	Z ANTIQUE BRONZE	-LEDW

-LEDWD LED 90 CRI WARM COLOR DIMMING 3000K-2200K 120V **-LED927** A19 LED 90 CRI 2700K 120V Z ANTIQUE BROS SATIN NICKEL



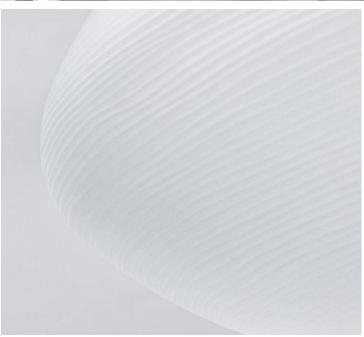














SURF GREEN

WHITE

Thick, organic flowing glass is molded by artisans in Poland to create an incredibly deep and rhythmic silhouette through which the light is artfully diffused.



LINE-VOLTAGE

Low-Voltage, 35 watt halogen bi-pin lamp / Dimmable with low-voltage electronic

Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic

SPECIFICATIONS

6 feet of field-cuttable cable

Accepts a 12 volt bi-pin lamp, yet is included in the line-voltage section because it is not compatible with low-voltage systems such as MonoRail or Freejack. Each pendant ships complete with canopy and transformer to be mounted in the junction box.

COMPLEMENTARY PRODUCT


Pendant / P. 86

700TDADR	COLOR	CANOPY FINISH	LAMP					
	C CLEAR K SMOKE G SURF GREEN W WHITE U STEEL BLUE	B BLACK S SATIN NICKEL	12 VOLT HALOGEN -LEDS930 12 VOLT LED 90 CRI 3000K					





Thick, organic flowing glass is molded by artisans in Poland to create an incredibly deep and rhythmic silhouette through which the light is artfully diffused.



LINE-VOLTAGE

Low-Voltage, 35 watt halogen bi-pin lamp / Dimmable with low-voltage electronic

-<u>^</u>- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic

SPECIFICATIONS

6 feet of field-cuttable cable

Accepts a 12 volt bi-pin lamp, yet is included in the line-voltage section because it is not compatible with low-voltage systems such as MonoRail or Freejack. Each pendant ships complete with canopy and transformer to be mounted in the junction box.

COMPLEMENTARY PRODUCT


Pendant / P. 84

700TDADRGP	COLOR		ANOPY FINIS	SH LAMP	
	C CLEAR K SMOK G SURF C W WHITE U STEEL I	REEN	BLACK SATIN NICKE	L -LEDS9	12 VOLT HALOGEN 30 12 VOLT LED 90 CRI 3000K





A thick orb of glass is rough molded then taken into the talented hands of European artisans to polish dozens of large, irregular facets on its outer surface. Light from the warm, retro radio tube inspired LED lamp is gently refracted as it shines through the transparent shade



LINE-VOLTAGE

-i- 120 volt 2 watt, 155 delivered lumen, 2200K or 2700K, E12 base LED vintage tubular lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

700TDRECP	COLOR	HARDWARE FINISH	LAMP		
	K SMOKE	B BLACK	- LED922 T6 LED 90 CRI 2200K 120V		
	U STEEL BLUE	S SATIN NICKEL	- LED927 T6 LED 90 CRI 2700K 120V		



Inspired by mid-century design, a simple sphere becomes an elegant contemporary statement when divided into three distinct regions. Each finished upper metal housing is briefly separated from its lower glass diffuser by a contrasting decorative metal band.



LOW-VOLTAGE

- Low-Voltage, 14 watt, 640 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Ceiling / P. 360, Wall / P. 402

700	SYSTI	EM	AKV SI	HAI	DE / TRIM FINISH	Н	ARDWARE FINISH	LAMP	
	FJ MP MO MO2	FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT MO	V	R	AGED BRASS / BRIGHT BRASS MATTE BLACK / AGED BRASS MATTE WHITE / CHROME		AGED BRASS** SATIN NICKEL	-LED927	12 VOLT LED 90 CRI 2700K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** AGED BRASS FINISH INCLUDES SATIN NICKEL SYSTEM HARDWARE



Small scale doesn't inhibit this pendant from making a dramatic statement. While each orb is perfectly spherical on the exterior, the interior surface features gradually thickening bands of glass which are further accentuated by the inner glass diffusor.



LOW-VOLTAGE

Û Low-Voltage, 35 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT


Chandelier / P. 268, Wall / P. 399

700	SYST	EM	SDN	CO	LOR	FIN	IISH	LAMP	
	FJ	FREEJACK		C	CLEAR	R	AGED BRASS**		12 VOLT HALOGEN
	MP	MONOPOINT*		K	TRANSPARENT SMOKE	S	SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K
	MO	MONORAIL							
	MO2	TWO-CIRCUIT MC	NORAIL						

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH ** AGED BRASS FINISH INCLUDES SATIN NICKEL SYSTEM HARDWARE



This pendant makes a dramatic statement, particularly when installed in clusters. While each orb is perfectly spherical on the exterior, the interior surface features gradually thickening bands of glass to add alluring visual interest.



LINE-VOLTAGE

-i- 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage radio lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

6 feet of field-cuttable black cloth cordT24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Chandelier / P. 268, Wall / P. 399

700TDSDNGP	COLOR	HARDWARE FINISH	LAMP	LAMP		
	C CLEAR	R AGED BRASS		T14 LED 90 CRI 2200K 120V		



A delicate artisan process creates a thick organic glass band on the interior of the hand-blown teardrop-shaped shade. When lit, the serene beauty of this elegant pendant is enhanced by the contrast of the opal glass diffuser.



LOW-VOLTAGE

Û Low-Voltage, 35 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

700	SYST	EM	ELA	CC	DLOR	FII	NISH	LAMP	
	FJ KL	FREEJACK KABLE LITE			CLEAR SMOKE		ANTIQUE BRONZE** SATIN NICKEL	-24	12 VOLT HALOGEN 24 VOLT HALOGEN
	MO	MONOPOINT* MONORAIL TWO-CIRCUIT MOI	NORAIL					-LEDS930	12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE





Rarely does such a petite fixture provide such dramatic impact. Whether used in parallel series or clusters of varying heights, each pendant's five frosted glass globes smoothly diffuse the LED light for an unmistakably high-end look.



LOW-VOLTAGE

-i- (5) Low-Voltage, 2.5 watt, 67 delivered lumen (335 total delivered lumens), 2700K LED modules / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT


Chandelier / P. 270, 272

700	SYSTI	EM	MRA	COLOR	FII	NISH	LAMP	
	FJ MP MO MO2	FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT M	ONORAIL	W WHITE		AGED BRASS** SATIN NICKEL	-LED927	12 VOLT LED 90 CRI 2700K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** AGED BRASS FINISH INCLUDES SATIN NICKEL SYSTEM HARDWARE



A wholly modern interpretation of a mini chandelier, this delicately scaled pendant features five glass spurs extending dramatically in opposing directions, each illuminated by a diffused LED light source.



LOW-VOLTAGE

-i- (5) Low-Voltage, 2.5 watt, 91 delivered lumen (457 total delivered lumens), 2700K LED modules / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Chandelier / P. 273, 274

700	SYST	EM	SPR	CC	DLOR	FII	NISH	LAMP	
	FJ MP MO MO2	FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT MON	ORAIL	F	FROST		AGED BRASS** SATIN NICKEL	-LED927	12 VOLT LED 90 CRI 2700K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** AGED BRASS FINISH INCLUDES SATIN NICKEL SYSTEM HARDWARE



Large, capsule shaped, metal shades are plated with either highly reflective metallic chrome or copper and almost completely enclosed except for a small aperture for the downward firing lamp which provides a solid punch of task lighting.

LINE-VOLTAGE


120 volt 39 watt, medium base halogen PAR 20 lamp / Dimmable with standard incandescent dimmer

-a-120 volt 6 watt, 450 delivered lumen, 3000K, medium base LED PAR 20 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp



700	SYSTE	M l	IRDP	COL	OR	CA	NOPY FINISH	LAMP	
	TD M	ionopoin Trak	Т		METALLIC CHROME METALLIC COPPER	S	BLACK* SATIN NICKEL WHITE	-LED930	INCANDESCENT 120V PAR 20 LED 90 CRI 3000K 120V

^{*} BLACK FINISH ONLY AVAILABLE ON TD



An architecturally inspired anodized aluminum heat sink, offered in satin nickel or copper, is encased in beautiful clear, hand-blown glass as the warm color dimming LED downlight provides a punch of diffused task lighting.


LINE-VOLTAGE

-i- 120 volt 14.5 watt, 684 delivered lumen, 3000K-2200K warm color dimming LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

Complete photometrics available at www.techlighting.com



700	SYSTEM	AMRP	GLASS / HARDWARE COLOR	CANOPY FINISH	LAMP
-----	--------	-------------	------------------------	---------------	------

TD MONOPOINT TT T-TRAK CP CLEAR/COPPER

CS CLEAR/SATIN NICKEL
NP NO GLASS/COPPER
NS NO GLASS/SATIN NICKEL

B BLACK*
S SATIN NICKEL
W WHITE


-LEDWD LED 90 CRI WARM COLOR DIMMING 3000K-2200K 120V

^{*} BLACK FINISH ONLY AVAILABLE ON TD





Each Venetian glass cylinder is comprised of three distinct layers of glass. Molded transparent clear glass forms the base, then frosted white glass envelops it and finally, the top layer of colored glass is applied. For dramatic impact, each shade is hand carved to allow light to escape from within.



LOW-VOLTAGE

- Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable


700	SYSTE	ΕM	TLS	SIZ	ZE	CO	LOR	FI	NISH	LAMP	
	FJ MP	FREEJACK MONOPOINT*		S	SMALL	В	BLACK		ANTIQUE BRONZE	-24	12 VOLT HALOGEN 24 VOLT HALOGEN
	MO	MONORAIL TWO-CIRCUIT MON	ORAII	_	LANGE	W	WHITE	_	SATIN NICKEL		12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME NOT OFFERED ON TWO-CIRCUIT MONORAIL





Slender silhouettes of beautifully molded transparent glass undergo a delicate treatment to create an intricate crackle effect which gently catches and refracts the light pouring downward from the optic-controlled LED source.

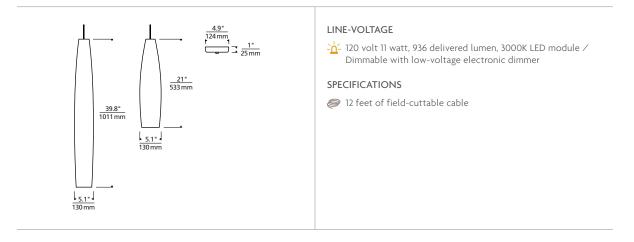

700TDCDAP	SIZE	COLOR	HARDWARE FINISH	LAMP		
		CC CLEAR CRACKLE	S SATIN NICKEL	-LED930	12 VOLT LED 90 CRI 3000K	













MINA, ALVA & SOCO CUSTOM DESIGN WELL WITHIN REACH


Whether you're a design-savvy consumer or creative-minded lighting specifier, Tech Lighting has developed the SoCo, Mina and Alva fixtures as perfect ways for you to design custom pendants that uniquely fit the aesthetic of the space you intend to illuminate. By allowing varying custom selections of socket style, cord color, cord length, hardware finish, lamp/globe type, fixture density, accessories and swag options; there are over 5000 unique ways to configure these incredibly versatile fixtures, each capable of making a highly functional yet bold statement in your home or project.







An elegant sphere of pure optic crystal is laser etched to create a mysterious yet beautiful orb floating within. When illuminated by the downward-firing LED hidden within the socket, the orb glows brilliantly while the fixture provides a bounty of task light on surfaces below.



LINE-VOLTAGE

-120 volt 9 watt, 135 delivered lumen, 3000K, 2200K or 3000K-2200K warm-color dimming LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

- 6 feet of field-cuttable cloth cord
- Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Accessory / P. 108, 3-Lite, 7-Lite, 11-Lite Chandelier / P. 262

700TDMINAP	SIZE	COLOR	CORD COLOR	HARDWARE FINISH	LAMP	
	1 1-LITE 3 3-LITE CHANDELIER 7 7-LITE CHANDELIER 11 11-LITE CHANDELIER	C CLEAR	B BLACK I BLACK & WHITE U BLUE N BROWN P COPPER F FUSCIA Y GRAY O ORANGE R RED T TEAL W WHITE	R AGED BRASS B BLACK S SATIN NICKEL	-LEDWD -LED922 -LED930	

CUSTOMIZE YOUR MINA & ALVA PENDANTS







CORD COLOR OPTONS



RED



TEAL



WHITE


BLUE



BROWN



The classic squirrel cage lamp is reincarnated as a modern socket and cord-style LED pendant. An LED is smartly hidden within the "socket" then combined with a solid "bulb" of pure optic crystal. Intricately detailed "filaments" are laser-etched into the crystal for a visually intriguing fixture.



LINE-VOLTAGE

120 volt 9 watt, 135 delivered lumen, 3000K, 2200K or Warm Color Dimming 3000K-2200K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

- 6 feet of field-cuttable cloth cord
- Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Accessory / P. 108, 3-Lite, 7-Lite, 11-Lite Chandelier / P. 264

700TDALVPMC	SIZE	CORD COLOR	HARDWARE FINISH	LAMP	
	1-LITE 3 3-LITE CHANDELIER 7 7-LITE CHANDELIER 11 11-LITE CHANDELIER	B BLACK I BLACK & WHITE U BLUE N BROWN P COPPER F FUSCIA Y GRAY O ORANGE R RED T TEAL W WHITE	R AGED BRASS B BLACK S SATIN NICKEL	-LEDWD -LED922 -LED930	LED 90 CRI WARM COLOR DIMMING 3000-2200K 120V LED 90 CRI 2200K 120V LED 90 CRI 3000K 120V

SWAG HOOK OPTION

Use as a creative tool to gracefully change a pendant's point of suspension from the mounting canopy to any point on the ceiling. Order one or multiple for each pendant.



700TDSWG FINISH

R AGED BRASS Z ANTIQUE BRONZE B BLACK S SATIN NICKEL W WHITE

LOCUS ACCESSORY OPTION

Available in three sizes, this clean, circular accessory adds dimension and scale as it frames Tech Lighting's simple socket and cord style pendants including Mina, SoCo and Alva (sold separately).



700LOCUS SIZE

13 13" SMALL 18 18" MEDIUM 23 23" LARGE

CANOPY FINISH R AGED BRASS B BLACK S SATIN NICKEL



Tech Lighting's SoCo system of Socket & Cords delivers choice, flexibility and the power of custom design. Mix, match and cluster to create a truly unique light sculpture or just install a few at a time to put light exactly where you need it. Available in 2 socket styles, 3 standard lengths, 11 cord colors and 7 finishes.



4.5" CANOPY STANDARD WITH EVERY PENDANT

LINE-VOLTAGE

SoCo sockets accommodate any 120 volt, medium base lamp up to 150 watts (not included) making it easy to create your own look

SPECIFICATIONS



9 standard colors options and 3 standard cord lengths (8', 16', 24'), the possibilities are almost limitless

Due to the diameter of the cord, SoCo pendants do not currently work with our T-TRAK system or our multi-port canopies. For compatible mini canopies see P. 107

700TDSOCOP	SOCKET	CORD LENGTH**	CC	ORD COLOR**	FI	NISH***
* VINTAGE SOCKET NO ** CUSTOM CORD LENG QUOTES DEPARTMEN ** SHIPS WITH MATCHIN	THS AND COLORS A' T: QUOTES@GENER	VAILABLE, CONTACT THE	Р	BLACK BLACK & WHITE BLUE BROWN COPPER FUSCIA GRAY ORANGE RED TEAL WHITE	Z B C P	BLACK CHROME

1 CHOOSE YOUR SOCKET & FINISH

Select between a modern or vintage socket in your ideal finish. A 4.5" flush canopy in the matching metal finish ships standard with every pendant.



2 CHOOSE YOUR FABRIC CORD COLOR & LENGTH (8', 16' or 24')

Contact us for alternate colors and custom lengths or let us cut your cords to size so you save time during installation



CUSTOM CORD COLORS AVAILABLE, CONSULT FACTORY

3 CHOOSE YOUR LAMP TO COMPLETE THE LOOK

SoCo sockets accommodate any medium base lamp up to 150 watts. We have made it easy to order some of the most popular lamps. For more lamping options, see P. 656-658



4 MULTI CANOPY OPTIONS

Mount to a standard 4" junction box with round plaster ring (provided by electrician).

700TDMRD	SIZE	CANOPY	FINISH
	3 3-PORT 7 7-PORT 11 11-PORT 19 19-PORT	T METAL	R AGED BRASS Z ANTIQUE BRONZE B BLACK S SATIN NICKEL W WHITE
⊢ 4.5° 114 mm		6.5 ° 165 mm	1.7* 43 mm
⊢ 6.5" 165 mm	1.7" 43 mm	11-PORT 6.5" 165 mm 19-POR	1.7" 43 mm

5 SWAG HOOK OPTION

Use as a creative tool to gracefully change a pendant's point of suspension from the mounting canopy to any point on the ceiling. Order one for each pendant.

700TDSWG	FINISH
	R AGED BRASS
	Z ANTIQUE BRONZE
	B BLACK
	S SATIN NICKEL
	W WHITE
1	.8" 20 mm

6 LOCUS ACCESSORY OPTIONS


Available in three sizes, this clean, circular accessory adds dimension and scale as it frames Tech Lighting's simple socket and cord style pendants including Mina,

SoCo and Alva (sold separately).

700LOCUS	SIZE	CANOPY FINISH
	13 13" SMALL 18 18" MEDIUM 23 23" LARGE	R AGED BRASS B BLACK S SATIN NICKEL W WHITE



Available in three sizes, this clean, circular accessory adds dimension and scale as it frames Tech Lighting's simple socket and cord style pendants including Mina, SoCo and Alva (sold separately).

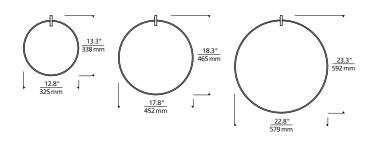

700LOCUS	SIZE	ACCESSORY FINIS	
	13 13" SMALL	R AGED BRASS	


18 18" MEDIUM 23 23" LARGE B BLACK
S SATIN NICKEL
W WHITE










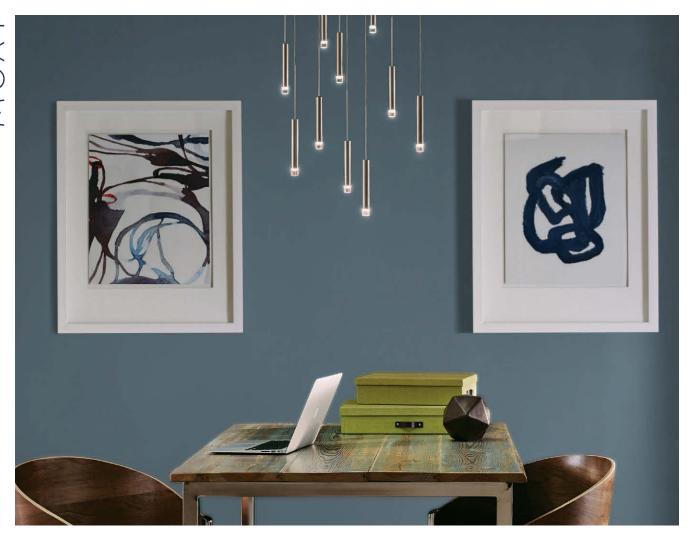

Small and versatile, the slim metal body is accented by an optic-grade acrylic diffuser which features sixteen tiny facets to create depth and dimension. Install alone for a minimal statement or in clusters at varying heights for a dramatic impact.

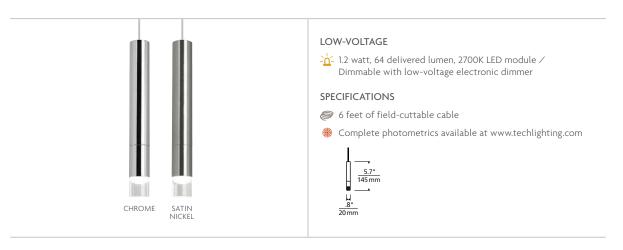

700	SYSTEM		MXY	FINISH		VOLTAGE	
	FJ	FREEJACK		C	CHROME	-LED927	LED 90 CRI 2700K 120V
	KL	KABLE LITE		S	SATIN NICKEL		
	MP	MONOPOINT*					

MO MONORAIL**

MO2 TWO-CIRCUIT MONORAIL**

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL



A precision die cast aluminum body serves a dual role as a geometrically striking design detail and the heat sink for this line voltage LED pendant. An optical grade pressed glass lens effectively distributes the output for excellent task lighting on the surface below while eliminating horizontal glare.

LINE-VOLTAGE

10 watt, 210 delivered lumen, 3000K or Warm Color Dimming 3000K-2200K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

6 feet of field-cuttable cloth cord

COMPLEMENTARY PRODUCT

Pendants / P. 114, 115

700TDERSBGP HARDWARE FINISH

B BLACK

-LEDWD LED 90 CRI WARM COLOR DIMMING 3000K-2200K3000K 120V -LED 90 CRI 3000K 120V



A precision die cast aluminum body serves a dual role as a geometrically striking design detail and the heat sink for this low voltage LED pendant. An optical grade pressed glass lens effectively distributes the output for excellent task lighting on the surface below while eliminating horizontal glare.

LOW-VOLTAGE

-10 watt, 210 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Pendants / P. 114, 115




700		SYSTEM		ERSB	FINISH		LAMP		
		FJ	FREEJACK		C	CHROME	-LED830	12 VOLT LED 80 CRI 3000k	
		MP	MONOPOINT*		S	SATIN NICKEL			
		840	MACNIODAIL**						

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL

MO2 TWO-CIRCUIT MONORAIL**



Beautifully executed hand blown glass echoing the silhouette of classic industrial light fixtures is combined with our LED Eros pendant as the light source for a rustic modern aesthetic.



LINE-VOLTAGE

-n-10 watt, 210 delivered lumen, 3000K or Warm Color Dimming 3000K-2200K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

6 feet of field-cuttable cloth cord


COMPLEMENTARY PRODUCT

Pendants / P. 113, 115

700TDHYBP	COLOR	HARDWARE FINISH	LAMP	
	C METALLIC CHROME	B BLACK		LED 90 CRI WARM COLOR DIMMING 3000K-2200K3000K 120V LED 90 CRI 3000K 120V



Two distinct sizes of bulb-shaped, hand blown glass are combined with our LED Eros pendant as the light source to create unique, sophisticated looks.



LINE-VOLTAGE

-n-10 watt, 210 delivered lumen, 3000K or Warm Color Dimming 3000K-2200K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

6 feet of field-cuttable cloth cord


COMPLEMENTARY PRODUCT

Pendants / P. 113, 114

700TDBSTP SIZE	E	SHADE COLOR	HARDWARE FINISH	LAMP	
-		C CLEAR T TRANSPARENT SMOKE	B BLACK		LED 90 CRI WARM COLOR DIMMING 3000K-2200K3000K 120V LED 90 CRI 3000K 120V



Grand scale and unparalleled quality are immediately evident when approaching this large scale glass pendant. The organic bulb shape is hand blown by highly skilled Polish artisans.



LINE-VOLTAGE

120 volt 60 watt, S21 Squirrel Cage lamp / Dimmable with standard incandescent dimmer

-h- 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage Squirrel Cage lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

Black Finish: 6 feet of field-cuttable black cloth cord Satin Nickel Finish: 6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT


Pendants / P. 118, 119

700TDQNTP	COLOR	CANOPY FINISH	LAMP		
	C CLEAR G SURF GREEN K SMOKE	B BLACK S SATIN NICKEL	INCANDESCENT 120V -LED922 ST19 LED 90 CRI 2200K 12 -LED927 ST19 LED 90 CRI 2700K 12		





This large scale glass pendant is handcrafted by highly skilled Polish artisans who create a classic bulb shape whose ribbed organic texture gently manipulates light as it passes through.



LINE-VOLTAGE

120 volt 60 watt, S21 Squirrel Cage lamp / Dimmable with standard incandescent dimmer

-h- 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage Squirrel Cage lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

Black Finish: 6 feet of field-cuttable black cloth cord Satin Nickel Finish: 6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp


COMPLEMENTARY PRODUCT

Pendants / P. 116, 118

700TDHARP	COLOR	CANOPY FINISH	LAMP	
	C CLEAR	B BLACK	INCANDESCENT 120V	
	G SURF GREEN	S SATIN NICKEL	-LED922 ST19 LED 90 CRI 2200K 120V	
	K SMOKE		-I FD927 ST19 LFD 90 CRL2700K 120V	



A classic tulip silhouette is elevated to pure elegance in this large scale glass pendant which is handcrafted by highly skilled Polish artisans.



LINE-VOLTAGE

120 volt 60 watt, S21 Squirrel Cage lamp

-120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage Squirrel Cage lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

Black Finish: 6 feet of field-cuttable black cloth cord Satin Nickel Finish: 6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT


Pendants / P. 116, 118

700TDPRCP	C	OLOR	CA	ANOPY FINISH	LAMP	
	_	CLEAR SURF GREEN	_	BLACK SATIN NICKEL	-LED922	INCANDESCENT 120V ST19 LED 90 CRI 2200K 120V
	K	SMOKE			-LED927	ST19 LED 90 CRI 2700K 120V



A remarkable blend of scale and elegance with a touch of dramatic flair, the hand blown outer glass shade features smooth, undulating ripples reminiscent of a gently disturbed pool of water.

An inner glass diffuser provides visual contrast and mirrors the tall conical shape.



LINE-VOLTAGE

120 volt 53 watt, medium base halogen A19 lamp / Dimmable with standard incandescent dimmer

120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

R HARDWARE FINISH	LAMP	
F GREEN B BLACK* DKE S SATIN NICKEL	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V
2	RF GREEN B BLACK*	AR Z ANTIQUE BRONZE* RF GREEN B BLACK* -LED927 OKE S SATIN NICKEL

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD



With a modern take on vintage French perfume bottles, the silhouette is sleek and clean while still warm and elegant. A metal band separates the top and bottom hand-blown glass pieces, and the bottom glass features a beautiful clear draw adding richness and depth to the design.

LOW-VOLTAGE

Low-voltage, 20 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable



700	SYST	EM	PFM	COLOR (TOP/BOTTOM)	FI	NISH	LAN	LAMP		
	FJ MP	FREEJACK MONOPOINT*		CLCL CLEAR/CLEAR		ANTIQUE BRONZE SATIN NICKEL	-24	12 VOLT HALOGEN 24 VOLT HALOGEN		
	MO	MONORAIL								

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH

MO2 TWO-CIRCUIT MONORAIL



With a modern take on vintage French perfume bottles, the silhouette is sleek and clean while still warm and elegant.

LINE-VOLTAGE


120 volt 60 watt, S21 Squirrel Cage Lamp
Dimmable with standard incandescent dimmer

-120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage Squirrel Cage lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp



700TDPFMGP COLOR (TOP/BOTTOM)

CLCL CLEAR/CLEAR

HARDWARE FINISH

Z ANTIQUE BRONZE
B BLACK

B BLACK
S SATIN NICKEL
W WHITE

 LAMP
 INCANDESCENT 120V

 -LED922
 ST19 LED 90 CRI 2200K 120V

 -LED927
 ST19 LED 90 CRI 2700K 120V



A new twist on the classic teardrop silhouette, the glass is hand-blown by artisans $% \left(1\right) =\left(1\right) \left(1$ with a flawless clear draw at the top and then hand carved to add visual interest and highlight its modern color options.



LOW-VOLTAGE

🖺 Low-voltage, 35 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

WHITE

Includes white inner glass diffuser

700	SYST	em AVA	CC	OLOR	FII	NISH	LAN	1P
	FJ MP MO MO2	FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MONORAIL**	C O K	AQUA CLEAR ORANGE SMOKE WHITE	C	ANTIQUE BRONZE CHROME SATIN NICKEL	-24	12 VOLT HALOGEN 24 VOLT HALOGEN

SMOKE

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL



Bulb-shaped glass is hand-blown by artisans with a solid draw, then hand carved to add visual interest and to help capture and diffuse the light.



LOW-VOLTAGE

 $\ensuremath{\mathring{\square}}$ Low-voltage, 20 watt clear xenon bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

700	SYST	EM	AVY	COLOR		FINISH		LAMP		
	MO	FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MON	ORAIL**	ò	AQUA ORANGE SMOKE	C	ANTIQUE BRONZE CHROME SATIN NICKEL	-24	12 VOLT XENON 24 VOLT XENON	

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL



Created by the skilled hands of Venetian artisans, this dramatically thick teardrop shaped glass features a beautiful clear draw and glows brilliantly while providing soft accent lighting on surfaces below.



LOW-VOLTAGE

Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Pendant / P. 126


700	SYSTEM		ALI (COLOR		NISH	LAMP		
	FJ	FREEJACK	1	N BROWN	Z	ANTIQUE BRONZE		12 VOLT HALOGEN	
	MP	MONOPOINT*	I	SMOKE	C	CHROME	-24	24 VOLT HALOGEN	
	MO	MONORAIL*	ı	J STEEL BLUE	S	SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K	
	1402	TIMO CIRCUIT MONO	ο Λ II ** 1	BI VALUET					

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL





This elegant, large scale glass pendant is masterfully hand-blown in Poland to feature a beautiful clear draw at the crown of the ample, flowing teardrop silhouette.



LINE-VOLTAGE

120 volt 53 watt, medium base halogen A19 lamp / Dimmable with standard incandescent dimmer

-i- 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cable

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 124

700TDALIGP	COLOR	HA	ARDWARE FINISH	LAMP	
	K SMOKE U STEEL BLUE W WHITE	B S	ANTIQUE BRONZE BLACK SATIN NICKEL WHITE	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V





Created by the skilled hands of Venetian artisans, the rick opaque color of this cone shaped glass is crowned by a beautiful clear draw and glows brilliantly while providing soft accent lighting on surfaces below.



LOW-VOLTAGE

Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

-h- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

700	SYST	EM	SLN	COLOR	FINISH	LAMP		
		FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MONO		K SMOKE U STEEL BLUE W WHITE	Z ANTIQUE BRONZE C CHROME S SATIN NICKEL	-24 -LEDS930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K	

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL



Inspired by classic crystal drops on traditional chandeliers, pure optic crystal is hand-cut to create a dual faceted pendant whose simplicity equals its elegance.



LOW-VOLTAGE

- û Low-Voltage, 35 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- -h- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

700	SYST	EM	LST	COLOR	FI	NISH	LAMP	
		FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MONOR	AIL**	K SMOKE W WHITE	C	ANTIQUE BRONZE CHROME SATIN NICKEL	-24 -LEDS9	12 VOLT HALOGEN 24 VOLT HALOGEN 130 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL



A delicately designed hand-blown glass pendant features a unique rippled inner lip which meets the case glass inner shade as it softly diffuses the light.



LOW-VOLTAGE

 $\ensuremath{\mathring{\square}}$ Low-Voltage, 35 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

700	SYST	EM	BLW	CC	DLOR	FI	NISH	LAN	IP
	FJ	FREEJACK		C	CLEAR	Z	ANTIQUE BRONZE***		12 VOLT HALOGEN
	KL	KABLE LITE		В	OCEAN BLUE	C	CHROME	-24	24 VOLT HALOGEN
	MP	MONOPOINT*		K	SMOKE	S	SATIN NICKEL		
	MO	MONORAIL**							
	MO2	TWO-CIRCUIT MON	IORAIL**						

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH

** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL

*** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE





A contemporary glass shade made of beautifully transparent glass features a graceful shape and conical inner diffuser with a machined metal detail.

LOW-VOLTAGE

- Û Low-Voltage, 35 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- -ii- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable ${\tt SORAA@LED\ module\ /\ Dimmable\ with\ low-voltage\ electronic}$ or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Pendants / P. 133, 134



700	SYST	EM	MML	MML COLOR FINISH				LAMP			
	FJ KL MP MO MO2	FREEJACK KABLE LITE MONOPOINT* MONORAIL** TWO-CIRCUIT MOI	NORAIL**	Ċ	AQUA CLEAR SMOKE	C	ANTIQUE BRONZE*** CHROME SATIN NICKEL	-24 -LEDS930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K		



A contemporary shade made of beautifully transparent glass features a graceful shape and conical inner diffuser with a machined metal detail.

LOW-VOLTAGE

- Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Pendants / P. 133, 134



700	SYST	EM	MLP	COLOR	FI	NISH	LAMP	
		FREEJACK MONOPOINT* MONORAII**		Q AQUA C CLEAR K SMOKE	C	ANTIQUE BRONZE CHROME SATIN NICKEI		12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K
		TWO-CIRCUIT MONOR	AIL**	N SIVIORE	,	SATIVIVICKEE	-LLD33330	12 VOLI LED 30 CIN 3000K


^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL
*** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE





A contemporary shade made of beautifully transparent glass features a graceful shape and conical inner diffuser with a machined metal detail.



LINE-VOLTAGE

120 volt 40 watt, mini-candelabra base halogen E11 lamp / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

COMPLEMENTARY PRODUCT


Pendants / P. 132, 134

700		SYSTEM MLP		MLP	COLOR			ARDWARE FINISH	LAMP	
		TD	MONOPOIN	JT (Q	AQUA	Z	ANTIQUE BRONZE	INCANDESCENT 120	
		TT	T-TRAK	(c	CLEAR	В	BLACK*		
				-	K	SMOKE	S	SATIN NICKEL		
					۸	TALLOF DINE ANADED	10/	VACUATE		

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD



An unexpectedly large contemporary shade made of beautifully transparent glass features a graceful shape and conical inner diffuser, both of significant stature for a dramatic impact.



LINE-VOLTAGE

120 volt 53 watt, medium base halogen A19 lamp / Dimmable with standard incandescent dimmer

-o-120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

12 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT


Pendants / P. 132, 133

700TDMLGP		OLOR	HA	ARDWARE FINISH	LAMP				
	Ċ	AQUA CLEAR SMOKE	B S	ANTIQUE BRONZE BLACK SATIN NICKEL WHITE	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V			





The simple cylinder is elevated to a rare level of sophistication as the sleek metal band connects separate upper and lower hand-blown glass pieces which can be customized via several color combinations. Dual LED light sources provide direct and indirect illumination. Visit techlighting.com for more examples.

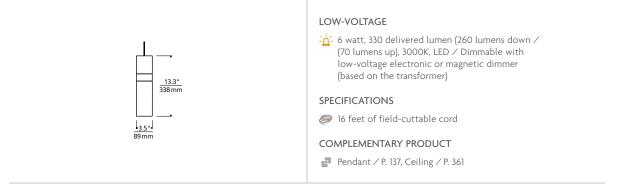

700 SYSTEM M	N TOP COLOR	BOTTOM COLOR	RING / HARDWARE FINISH	LAMP	
FJ FREEJACK MP MONOPOINT*	CL CLEAR SM SMOKE	CL CLEAR SM SMOKE	ZZ ANTIQUE BRONZE / ANTIQUE BRONZE	-LED 12 VOLT LED 80 CRI 3000K	
MO MONORAIL MO2 TWO-CIRCUIT MONO	TK TRANSPARENT SMOKE		BS BLACK / SATIN NICKEL SS SATIN NICKEL / SATIN NICKEL		

 $^{^{\}star}$ includes 4" round flush canopy in coordinating finish

The simple cylinder is elevated to a rare level of sophistication as the sleek metal band connects separate upper and lower hand-blown glass pieces which can be customized via several color combinations. Visit techlighting.com for more glass combinations.




700	SYSTEM MANGP	TOP COLOR	BOTTOM COLOR	RING / HARDWARE FINISH	LAMP
	TD MONOPOINT TT T-TRAK	WA WHITE ACRYLIC* CL CLEAR SM SMOKE TK TRANSPARENT SMOKE WH WHITE	WA WHITE ACRYLIC* CL CLEAR SM SMOKE TK TRANSPARENT SMOKE WH WHITE	ZZ ANTIQUE BRONZE / ANTIQUE BRONZE BS BLACK / SATIN NICKEL SS SATIN NICKEL / SATIN NICKEL	-LED LED 80 CRI 3000K 120V -LED277 LED 80 CRI 3000K 277V

MANETTE GRANDE

^{*} WHITE ACRYLIC OPTION NOT AVAILABLE WITH GLASS COMBINATIONS ** ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD



The contrast of crisp, industrial hardware against an elegantly tapered hand-blown glass shade combine in this lantern-inspired pendant to create a modern vibe.



LOW-VOLTAGE

Opaque Glass: Low-voltage, 50 watt frosted xenon bi-pin lamp Transparent Glass: 20 watt clear xenon bi-pin lamp

- 8 watt replaceable LED SORAA® module

SPECIFICATIONS

700	SYSTEM		RVR (COLOR	ME	TAL FINISH / HARDWARE FINISH	LAMP	
	FJ KL MP	FREEJACK KABLE LITE MONOPOINT*	1	SMOKE T TRANSPARENT SMOKE W WHITE	BS	CHROME / CHROME MATTE BLACK / SATIN NICKEL SATIN NICKEI / SATIN NICKEI		12 VOLT XENON 24 VOLT XENON 12 VOLT LED 90 CRI 3000K
	MO	MONORAIL** TWO-CIRCUIT MONO		WHITE	33	SATIN NICKEL/ SATIN NICKEL	-LED33330	12 VOLI LED 90 CNI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL





Antique charm meets contemporary design as this unique pendant combines a delicately ornate glass fount with a tapered rolled edge fabric shade for an unmistakably luxurious look.



LOW-VOLTAGE

Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Pendant / P. 142


700	SYST	SYSTEM K		COLOR	FOUNT COLOR		FINISH		LAMP		
	MO	FREEJACK KABLE LITE MONOPOINT* MONORAIL** TWO-CIRCUIT MONOF		B BLACK W WHITE	F	CLEAR FROST SMOKE	C	ANTIQUE BRONZE*** CHROME SATIN NICKEL	-24 -LEDS930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K	

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE ON MONORAIL OR TWO-CIRCUIT MONORAIL
*** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE





Antique charm meets contemporary design as this unique large scale pendant combines a delicately ornate glass fount with a tapered rolled edge fabric shade for an unmistakably luxurious look.



LINE-VOLTAGE



120 volt 75 watt, A19 medium base lamp / Dimmable with standard incandescent dimmer



120 volt 19 watt, 1680 delivered lumen, 2700K, medium base LED A21 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 140

700	SYS	STEM	KIELP	SHADE COLOR	FC	OUNT COLOR	FII	NISH	LAMP	
	TD	MONOP	OINT	B BLACK	C	CLEAR	Z	ANTIQUE BRONZE*		INCANDESCENT 120
	TT	T-TRAK		W WHITE	F	FROST	В	BLACK*	-LED927	A21 LED 90CRI 2700K 120V
					K	SMOKE	S	SATIN NICKEL		
							W	WHITE		

 $[\]ensuremath{^{\star}}$ antique bronze and black finish only available on TD





A spun metal upper body is hand-painted with rubberized enamel for a soft, matte finish then combined with a beautifully hand-polished, premium pressed glass shade for a unique contemporary closed bottom pendant.



LOW-VOLTAGE

☐ Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS


700	SYST	EM	HNK	SHADE COLOR	FINISH	LAMP	
		FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT MONO	RAIL	B BLACK RUBBERIZED A BRUSHED ALUMINUM W WHITE RUBBERIZED	S SATIN NICKEL	-24 -LEDS930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH



WHITE RUBBERIZED

A spun metal upper body is hand-painted with rubberized enamel for a soft, matte finish then combined with a beautifully hand-polished, premium pressed glass shade for a unique contemporary closed bottom LED pendant.



LINE-VOLTAGE

120 volt 150 watt, medium base A21 lamp / Dimmable with standard incandescent dimmer

120 volt 19 watt, 1680 delivered lumen, 2700K, medium base LED A21 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

700 SYSTEM HNKGP	SHADE COLOR	CANOPY FINISH	LAMP	
TD MONOPOINT TT T-TRAK	B BLACK RUBBERIZED A BRUSHED ALUMINUM	B BLACK* S SATIN NICKEL	-LED927	INCANDESCENT 120V A21 LED 90 CRI 2700K 120

^{*} BLACK FINISH ONLY AVAILABLE ON TD



Elegantly simple with complex details, this silhouette provides a fresh take on warehouse-inspired design. The spun metal shade features varying angular planes to create depth and dimension. Its crisp inflections are softened by a matte, rubberized finish to complete the modern industrial aesthetic.



LOW-VOLTAGE

 Low-Voltage, 50 watt halogen MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 6 watt, 435 delivered lumen, 3000K, replaceable SORAA® LED MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)


SPECIFICATIONS

	700	SYSTEM		RYK SHADE COLOR		FINISH LAMP		
MP MO			FREEJACK MONOPOINT* KABLE LITE	B BLACK A BRUSHED ALUMII G GOLD		S SATIN NICKEL		12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K
			MONORAIL TWO-CIRCUIT MON	-	GRAY White			

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH



Elegantly simple yet visually complex, its scale and silhouette combine to give a fresh take on large, warehouse-inspired design. The spun metal shade's crisp inflections are softened by a matte, rubberized finish to complete the modern industrial aesthetic.



LINE-VOLTAGE


- Small: 120 volt 53 watt, medium base halogen A19 lamp / Dimmable with standard incandescent dimmer
- Large: 120 volt 150 watt, G40 globe lamp / Dimmable with standard incandescent dimmer
- -M- Small & Large: 120 volt 19 watt, 1680 delivered lumen, 2700K, medium base LED A21 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cloth cord to match finish selection

700TDRYKP	SIZE	SHA	DE COLOR / CANOPY FINISH	LAMP	
	S SMALL L LARGE	AB GB YY	BLACK / BLACK BRUSHED ALUMINUM / BLACK GOLD / BLACK GRAY / GRAY WHITE / WHITE	-LED927	INCANDESCENT 120V A21 LED 90 CRI 2700K 120V



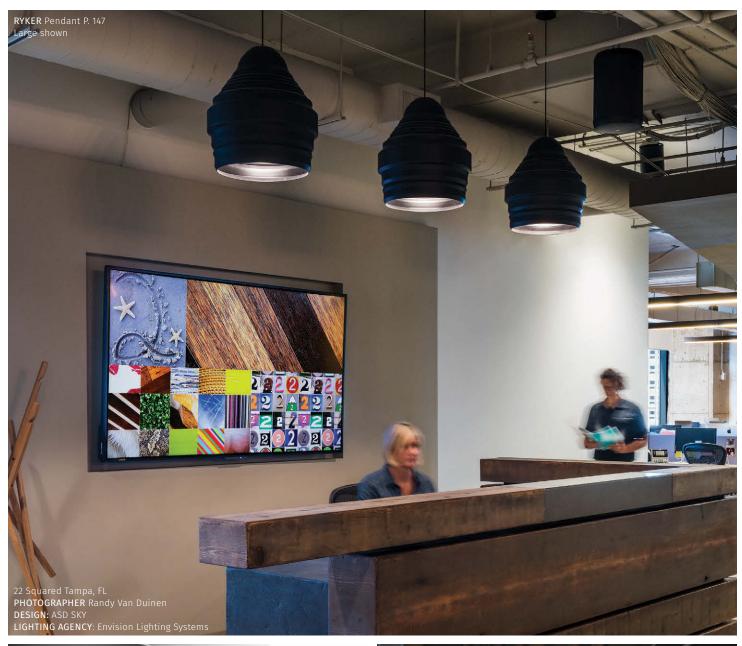








A sculptural metal frame whose arms elegantly represent the path the light is taking is surrounded by a modern, high-gloss, semi-translucent shade which allows light to playfully bounce around the fixture and enables just a hint of the light source itself to shine through.



LINE-VOLTAGE

Î.

120 volt 60 watt, medium base S21 Squirrel Cage lamp / Dimmable with standard incandescent dimmer

120 volt 39 watt, medium base halogen PAR 20 lamp / Dimmable with standard incandescent dimmer

120 volt 8 watt, 470 delivered lumen, 3000K, medium base LED PAR 20 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cloth cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 152, Chandelier / P. 280

700TDATCP	OUTER / INNER COLOR	CORD COLOR	CAGE FINISH	CANOPY FINISH	LAMP
	BG GLOSS BLACK/GOLD BS GLOSS BLACK/SILVER WG GLOSS WHITE/GOLD WS GLOSS WHITE/SILVER	B BLACK Y GRAY	S SATIN NICKEL	B BLACK S SATIN NICKEL W WHITE	-INC INCANDESCENT SQUIRREL CAGE 120V -PAR HALOGEN PAR20 120V -LED LED PAR20 80 CRI 3000K 120V










The scale of this piece will truly transform a space. A sculptural metal frame whose arms elegantly represent the path the light is taking is surrounded by a modern, high-gloss, semi-translucent shade which allows light to playfully bounce around the fixture and enables just a hint of the light source itself to shine through.

700TDATCGP	OUT	ER / INNER COLOR	CORD COLOR	CAGE FINISH	CANOPY FINISH	LAMP
	BS	GLOSS BLACK / GOLD GLOSS BLACK / SILVER	B BLACK Y GRAY	S SATIN NICKEL	S SATIN NICKEL	-INC INCANDESCENT SQUIRREL CAGE 120V -PAR HALOGEN PAR30L 120V
		GLOSS WHITE / GOLD GLOSS WHITE / SILVER				-LED LED PAR30L 80 CRI 3000K 120V





LINE-VOLTAGE

- (3) 120 volt 60 watt, medium base S21 Squirrel Cage lamps / Dimmable with standard incandescent dimmer
- (1) 60 watt medium base halogen PAR 30 long lamp / Dimmable with standard incandescent dimmer
- -i(I) 13 watt medium base LED 3000K PAR 30 long lamp /
 Dimmable with standard incandescent dimmer

SPECIFICATIONS

12 feet of field-cuttable cloth cord

COMPLEMENTARY PRODUCT


Pendant / P. 150, Chandelier / P. 280







Spun metal shade available in two styles: High Gloss features an exterior coated in a luxurious high gloss black or white paint paired with a matte white interior; Satin Nickel exterior is paired with Sunrise Orange or Matte White interior.



LINE-VOLTAGE

20 volt 150 watt, medium base G40 globe lamp with white globe diffusor / Dimmable with standard incandescent dimmer

-120 volt 15 watt, 900 delivered lumen, 3000K, medium base LED G40 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

700	700 SYSTEM PSP24		PSP24 OUTER/INNER COLO		R HARDWARE FINISH			LAMP		
	TD MONO		WW	HIGH GLOSS BLACK / WHITE HIGH GLOSS WHITE / WHITE SATIN NICKEL / SUNRISE ORANGE SATIN NICKEL / WHITE	S	BLACK* SATIN NICKEL WHITE	-LED830	INCANDESCENT 120V G40 LED 80CRI 3000K 120V		


^{*} BLACK FINISH ONLY AVAILABLE ON TD







Modern simplicity. A large white orb of hand-blown glass is suspended from colorful cloth cord for a dramatic statement.



LINE-VOLTAGE

Medium: 120 volt 75 watt, or equivalent medium base A19 lamp / Dimmable with standard incandescent dimmer

Grande: 120 volt 150 watt, or equivalent medium base G40 lamp / Dimmable with standard incandescent dimmer

Medium: 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp $\scriptstyle /$ Dimmable with LED compatible dimmer

Grande: 120 volt 15 watt, 900 delivered lumen, 3000K, medium base LED G40 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS



Medium: 6 feet of field-cuttable cloth cord Grande: 12 feet of field-cuttable cloth cord


700TDCLOP	SIZE	COLOR	CORD COLOR*	HARDWARE FINISH	LAMP	
	G GRANDE M MEDIUM	W WHITE	Y GRAY O ORANGE R RED	Z ANTIQUE BRONZE B BLACK S SATIN NICKEL		INCANDESCENT 120V (GRANDE ONLY) G40 LED 80 CRI 3000K 120V A19 LED 90 CRI 2700K 120V (MEDIUM ONLY)

 $^{{\}tt *CUSTOM\,CORD\,COLORS\,AVAILABLE, CONSULT\,QUOTES\,DEPARTMENT\,AT\,QUOTES@GENERATION-BRANDS.COM}\\$





Twenty inches in diameter, this hand-blown Murano glass is truly a work of art, and the inner white case glass helps diffuse the light.



LINE-VOLTAGE

120 volt 100 watt, medium base A19 lamp / Dimmable with standard incandescent dimmer

-i- 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp $\, / \,$ Dimmable with LED compatible dimmer

SPECIFICATIONS

12 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT


Pendant / P. 162

700TDIWOP	COLOR	HARDWARE FINISH	LAMP	
	K SMOKE	Z ANTIQUE BRONZE B BLACK S SATIN NICKEL W WHITE	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V





Twenty inches in diameter, this hand-blown Murano glass is truly a work of art. Classic Edison lamps and clean, modern hardware complete the look.



LINE-VOLTAGE

(3) 120 volt 60 watt, or E26 medium base Classic Edison lamps $\scriptstyle /$ Dimmable with standard incandescent dimmer

-h- (3) 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED Squirrel Cage lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

12 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp


COMPLEMENTARY PRODUCT

Pendant / P. 160

700TDWORP	COLOR	HARDWARE FINISH	LAMP	
	K SMOKE	Z ANTIQUE BRONZE		INCANDESENT 120V
		N POLISHED NICKEL	-LED922	ST19 LED 90 CRI 2200K 120V
		S SATIN NICKEL	-LED927	ST19 LFD 90 CRI 2700K 120V



Hand-blown by Italian artisans, the Moroccan-inspired shape of this large-scale, transparent glass pendant provides a dramatic backdrop for its various lamping options. The Mali Pendant makes a grand statement in any space, individually or clustered together.



LINE-VOLTAGE

2 120 volt 60 watt, medium base A19 Classic Edison lamp / Dimmable with standard incandescent dimmer

-120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage Squirrel Cage lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

12 feet of field-cuttable cable

T24 LED includes Title 24 Compliant lamp

700TDMALP COLOR

K SMOKE

HARDWARE FINISH Z ANTIQUE BRONZE

B BLACK
S SATIN NICKEL

W WHITE

LAMP

INCANDESCENT 120V


-LED922 ST19 LED 90 CRI 2200K 120V -LED927 ST19 LED 90 CRI 2700K 120V





STEEL BLUE LED

Hand-blown by Italian artisans, the Moroccan-inspired shape of this large-scale, transparent glass pendant provides a dramatic backdrop for its various lamping options. The Capsian Grande makes a grand statement in any space, individually or clustered together.



LINE-VOLTAGE

120 volt 60 watt, medium base S21 Squirrel Cage lamp $\scriptstyle /$ Dimmable with standard incandescent dimmer

-<u>h</u>- 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage Squirrel Cage lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

12 feet of field-cuttable cord

700TDCPSGP	COLOR	HARDWARE FINISH	LAMP		
		Z ANTIQUE BRONZE B BLACK S SATIN NICKEL W WHITE		INCANDESCENT 120V ST19 LED 90 CRI 2200K 120V ST19 LED 90 CRI 2700K 120V	





Teardrop-shaped transparent colored glass gently fades to clear. Amber, and olive green are diffused by a matching colored inner glass. Smoke is diffused by white inner glass.



LOW-VOLTAGE

 $\ensuremath{\mathring{\square}}$ Low-Voltage, 35 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS




700	SYSTEM		SOL	COLOR	FI	NISH	LAN	IP
	FJ MP	FREEJACK MONOPOINT*		A AMBER V OLIVE GREEN		ANTIQUE BRONZE CHROME**	-24	12 VOLT HALOGEN 24 VOLT HALOGEN
		MONORAIL** TWO-CIRCUIT MONO		K SMOKE	S	SATIN NICKEL		

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL





Large venetian teardrop-shaped transparent glass surrounds inner white case glass which helps gently diffuse the light.



LINE-VOLTAGE

20 volt 75 watt, medium base A19 lamp / Dimmable with standard incandescent dimmer

120 volt 19 watt, 1680 delivered lumen, 2700K, medium base LED A21 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

12 feet of field-cuttable cord

700TDSOLGP	COLOR	HARDWARE FINISH	LAMP	
	C CLEAR K SMOKE	Z ANTIQUE BRONZEB BLACKS SATIN NICKELW WHITE	-LED927	INCANDESCENT 120V A21 LED 90 CRI 2700K 120V



The LED source is hidden inside the upper metal cap and shines brightly through the extravagant, hand-faceted solid crystal for a strikingly dramatic effect inspired by the clean lines of ice formations.



700	SYST	EM	TBRC	FII	NISH**	LAM	P	
	FJ MP	FREEJACK MONOPOINT*		_	BLACK SATIN NICKEL	-LED	12 VOLT LED	80 CRI 3000K
		MONORAIL TWO-CIRCUIT MO	NODAII	W	WHITE			

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ALL FINISHES INCLUDE SATIN NICKEL CABLE AND SYSTEM CONNECTOR



Inspired by nature, the die-cast aluminum leaf-like silhouette quickly gives way to an ultra-modern aesthetic created by its inward firing LED light source and asymmetrical hollow center.



LOW-VOLTAGE

6 watt, 240 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

700	SYSTEM FLM		FLM	COL	OR / HARDWARE FINISH	LAM	LAMP			
	FJ KL MP MO MO2	FREEJACK KABLE LITE MONOPOINT* MONORAIL TWO-CIRCUIT MOI	NORAIL	SS WS	SATIN NICKEL / SATIN NICKEL WHITE / SATIN NICKEL	-LED	12 VOLT LED 80 CRI 3000K			

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH



A simple yet sophisticated look is created by a one-piece blown glass shade with a meticulously painted crown which cleverly hides the light source.



LOW-VOLTAGE

-h- 4.5 watt, 280 delivered lumen, 3000K replaceable LED module with diffuser / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)


SPECIFICATIONS

700	SYSTE	EM	MSQ	COL	OR BOTTOM / TOP	FI	NISH	LAM	P
	MP MO	FREEJACK MONOPOINT* MONORAIL		CW KB KY	CLEAR / WHITE SMOKE / BLACK SMOKE / GRAY	S	SATIN NICKEL	-LED	12 VOLT LED 80 CRI 3000K
	MO2	TWO-CIRCUIT MO	DNORAIL						

 $^{^{\}star}$ includes 4" round flush canopy in coordinating finish



Serious scale and sophistication are the foundations of this impressively large one-piece blown glass shade in a mid-century modern silhouette with a meticulously painted crown. Its gently curving diffuser evenly distributes the output of the LED light source.



LINE-VOLTAGE

- 22 watt, 1347 delivered lumen, 3000K, field replaceable LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

66" of variable rigid stems and lockable integrated ball joint to accommodate up to 45° ceiling slope

Complete photometrics available at www.techlighting.com

700TDMSQGP	COL	OR BOTTOM / TOP	Н	ARDWARE FINISH	LAMP	
	CW KB	CLEAR / WHITE SMOKE / BLACK	_	BLACK SATIN NICKEL	-LED -LED277	LED 80 CRI 3000K 120V LED 80 CRI 3000K 277V
	KY	SMOKE / GRAY	W	WHITE		



With intriguing design and a focus on high performance, this unique LED pendant is defined by its open center, thin metal frame and exposed geometrical heat sink.





LOW-VOLTAGE

-i- 5 watt, 300 delivered lumen, 3000K LED / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

Complete photometrics available at www.techlighting.com


COMPLEMENTARY PRODUCT

Head / P. 573

700	SYSTEM		COR	FINISH		LAMP	
	FJ KL MP	FREEJACK KABLE LITE MONOPOINT*		S	SATIN NICKEL	-LED830	12 VOLT LED 80 CRI 3000k

MO MONORAIL
MO2 TWO-CIRCUIT MONORAIL

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH

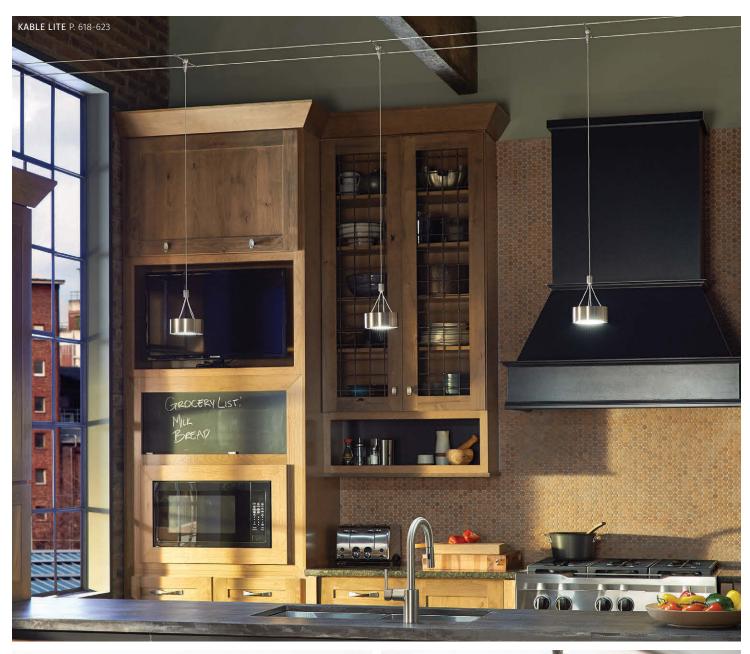








Sculptural and unexpected, this is a very modern take on the traditional finial. The LED light source shines brightly on the decorative finial perched inside the metal and glass exterior. The finish on the outer metal frame contrasts nicely making the polished finial inside the true focal point of the design.

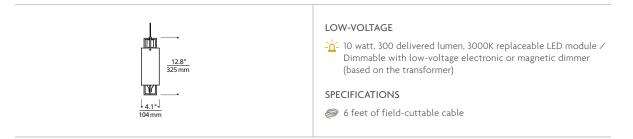

700	SYSTEM		PJT	COLOR	F	INISH	LAM	P
	MO	FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT MON	ORAIL	C CLEAR K SMOKE		ANTIQUE BRONZE SATIN NICKEL	-LED	12 VOLT LED 80 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH











SATIN NICKEL

Industrial-inspired dome-shaped metal shade.



LOW-VOLTAGE

 $\ensuremath{\mathring{\text{\sc l}}}$ Low-Voltage, 50 watt MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

-h- Low-Voltage, 6 watt, 435 delivered lumen, 3000K, replaceable SORAA® LED MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

600	SYST	EM	MCRGS	FINISH		LAMP		
	FJ KL MP	FREEJACK KABLE LITE MONOPOINT*			ANTIQUE BRONZE** SATIN NICKEL	-24 -LED930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K	

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE

MO2 TWO-CIRCUIT MONORAIL





Sleek cylindrical shaped metal shade provides crisp down light.

LOW-VOLTAGE

Low-Voltage, 50 watt MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 6 watt, 435 delivered lumen, 3000K, replaceable SORAA® LED MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

T24 LED includes Title 24 Compliant lamp

LAMP



 700
 SYSTEM
 PPR
 COLOR / FINISH

 FJ
 FREEJACK
 ZZ
 ANTIQUE BRC

 MP
 MONOPOINT*
 BS
 BLACK / SATIIN

 MO
 MONOPAIL
 SS
 SATIN NICKEL

 WO
 TWO-CIRCUIT MONORAIL
 WS
 WHITE / SATIIN

ZZ ANTIQUE BRONZE / ANTIQUE BRONZE
BS BLACK / SATIN NICKEL
SS SATIN NICKEL / SATIN NICKEL
WS WHITE / SATIN NICKEL

12 VOLT HALOGEN
-24 24 VOLT HALOGEN
-LED930 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH



A large, sleek cylindrical, metal shade provides crisp down light.

LINE-VOLTAGE


120 volt 39 watt, medium base halogen PAR 20 lamp / Dimmable with standard incandescent dimmer

-i-- 120 volt 8 watt, 470 delivered lumen PAR 20 LED lamp / Dimmable with standard incandescent dImmer

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp



700	SYSTEM	EM PPRGP		LOR	H	ARDWARE FINISH	LAMP			
	TD MON		_	GLOSS BLACK	_	BLACK* SATIN NICKFI	-I FD930	INCANDESCENT 120V PAR 20 I FD 90 CRI 3000K 120V		
	11 1-110/-	VIX.		SATIN NICKEL	_	/ WHITE	-LLD330	TAN 20 EED 30 CM 3000K 120V		

^{*} BLACK FINISH ONLY AVAILABLE ON TD





As it captures light in motion, the sleek metal surface is laser-cut with several horizontal cutouts which allow light to shine through the inner white case glass diffuser.



LOW-VOLTAGE

Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Linear Suspension / P. 320, Wall / P. 486, 487

700	SYSTEM		RVL	SHADE COLOR	Н	ARDWARE FINISH	LAMP		
		FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT MONOR		Z ANTIQUE BRONZE B GLOSS BLACK W GLOSS WHITE S SATIN NICKEL		ANTIQUE BRONZE SATIN NICKEL	-24 -LEDS930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K	

 $[\]star$ includes 4" round flush canopy in coordinating finish





Inspired by the sheen of big city streets and intersections illuminated at night, this unique pendant is composed of raw sheet steel protected with a clear lacquer coat and accented by brass spot welding at the joints with purposefully imperfect, rugged, industrial design.



LOW-VOLTAGE

Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT


Linear Suspension / P. 322, Wall / P. 485

700	SYST	EM	CRS F	PENDANT FINISH / HARDWARE FINISH	LAMP	
	FJ	FREEJACK	Z	STEEL / ANTIQUE BRONZE		12 VOLT HALOGEN
	MP	MONOPOINT*	5	STEEL / SATIN NICKEL	-24	24 VOLT HALOGEN
	MO	MONORAIL			-LEDS930	12 VOLT LED 90 CRI 3000k
	MO2	TWO-CIRCUIT MON	ORAII			

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH



This sleek glass cone, available in two sizes, will add subtle drama with a punch of task lighting in any setting. While the white glass provides a soft translucent glow, the black glass is totally impermeable by light for a deeply rich look.



LOW-VOLTAGE

🗓 Black: Low-Voltage, 35 watt MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

White: Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

-i- Black & White: Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable


700	SYST	ГЕМ	PIN	SIZE	COLOR	HARDWARE FINISH	LAMP	
	FJ KL	FREEJACK KABLELITE		S SMALL L LARGE	B BLACK W WHITE	Z ANTIQUE BRONZE**	-24	12 VOLT HALOGEN 24 VOLT HALOGEN
	MP	MONOPOINT*		E LANGE	** *******	S SATIN NICKEL		12 VOLT LED 90 CRI 3000K
	MO	MONORAII						

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE

MO2 TWO-CIRCUIT MONORAIL



This sleek spun metal cone, available in three graduated sizes and three contemporary finishes, features lamping options designed to provide a strong punch of task lighting on surfaces below.



LOW-VOLTAGE

Small & Large: Low-Voltage, 35 watt, MR16 lamp /
 Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

Grande: Low-Voltage, 50 watt, MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

-nd-Low-Voltage, 6 watt, 435 delivered lumen, 3000K, replaceable SORAA® LED MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

All finishes include Satin Nickel system hardware

T24 LED includes Title 24 Compliant lamp


700	SYSTE	ΕM	SUM	SIZ	ΖE	SHADE FINISH		LAMP	
	FJ MP MO MO2	FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT MO	ONORAIL	Ĺ	SMALL LARGE GRANDE	S	BLACK SATIN NICKEL WHITE	-24 -LED930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH





This slender, organic-shaped glass shade has vertical stringers to add depth and dimension.



LOW-VOLTAGE

Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)


Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

700	SYST	EM	ZEN S	IZE C	OLOR I	HARDWARE FINISH	LAMP	
	FJ	FREEJACK	-			ANTIQUE BRONZE		12 VOLT HALOGEN
	MP	MONOPOINT*	L	LARGE U	STEEL BLUE (CHROME**	-24	24 VOLT HALOGEN
	MO	MONORAIL**		W	/ WHITE 9	SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K
	MO2	TWO-CIRCUIT MON	ORAIL**					

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



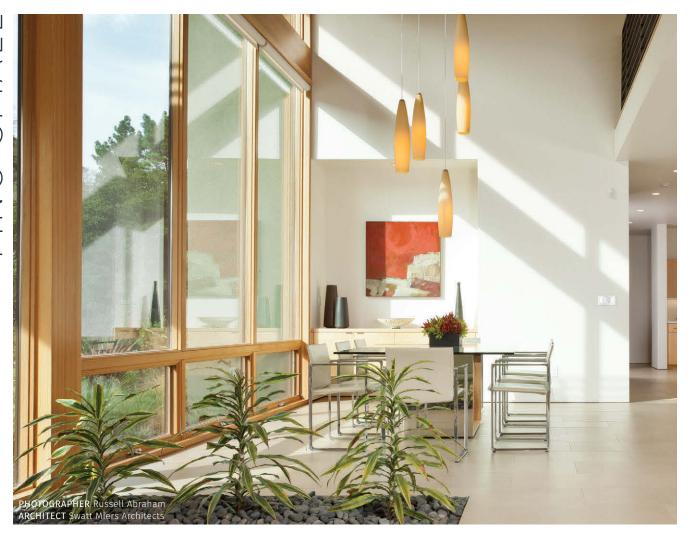


Slender case glass projects a warm, mid-century modern vibe in the spaces it illuminates.



700	SYSTEM	FINPS	COLOR	HARDWARE FINISH	LAMP	
	TD MONO		L LATTE W WHITE	Z ANTIQUE BRONZE* B BLACK* S SATIN NICKEL W WHITE	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V



Dramatically tall and slender case glass topped with a sleek metal detail projects a delightfully imposing, mid-century modern vibe in the spaces it illuminates.

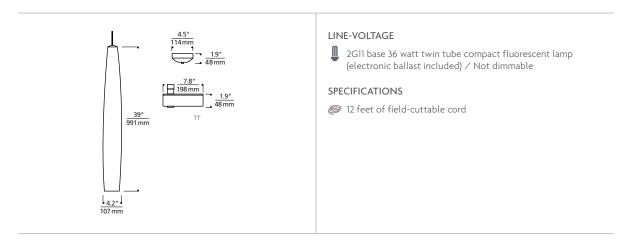

700	SYSTEM	FINPL COLOR		HARDWARE FINISH	LAMP	
	TD MONOP	OINT	L LATTE W WHITE	Z ANTIQUE BRONZE*B BLACK*S SATIN NICKELW WHITE	-CF -CF277	COMPACT FLUORESCENT 120V COMPACT FLUORESCENT 277V**

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD ** CF277 LAMP ONLY AVAILABLE ON TD



Patterns silk-screened onto hand-blown Italian pill-shaped glass are brought to life as light shines through an elegant, frosted inner glass diffuser.

700	SYST	EM ECN	C coi	OR / PATTERN	FINISH		LAMP	
	FJ	FREEJACK	GL	POLISHED GOLD / LATTICE	Z	ANTIQUE BRONZE**		12 VOLT HALOGEN
	KL	KABLE LITE	GM	POLISHED GOLD / MOROCCAN	C	CHROME***	-24	24 VOLT HALOGEN
	MP	MONOPOINT*	GP	POLISHED GOLD / PLAID	S	SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K
	MO	MONORAIL***	PL	POLISHED PLATINUM / LATTICE				
	MO2	TWO-CIRCUIT MONORAIL*	** PM	POLISHED PLATINUM / MOROCCAN				
			PP	POLISHED PLATINUM / PLAID				

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL





LOW-VOLTAGE

- ↓ Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- Cow-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS



Clear, flame-worked borosilicate glass—commercially known as Pyrex®— is formed into a dramatic cylinder with a flowing diagonal pattern of open glass which creates visual depth against an inner white glass diffuser.



LOW-VOLTAGE

Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Pendant / P. 194


700	SYST	EM	LIZ	CC	DLOR	FII	NISH	LAN	P
		FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MONOR	RAIL**	С	CLEAR	C	ANTIQUE BRONZE CHROME** SATIN NICKEL	-24	12 VOLT HALOGEN 24 VOLT HALOGEN

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL





Clear, flame-worked borosilicate glass – commercially known as Pyrex® – is formed into a large, dramatic cylinder with a flowing diagonal pattern of open glass which creates visual depth against an inner white glass diffuser.



LINE-VOLTAGE

2 120 volt 60 watt, BT15 medium base lamp / Dimmable with standard incandescent dimmer

-120 volt 6.5 watt, 810 delivered lumen, 2700K, medium base LED BT15 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

COMPLEMENTARY PRODUCT

Pendant / P. 192

700	SYSTEM	LIZGP	COLOR	HARDWARE FINISH	LAMP	
	TD MONO TT T-TRAK		C CLEAR	Z ANTIQUE BRONZE* B BLACK* S SATIN NICKEL W WHITE	-LED827	INCANDESCENT 120V BT15 LED 80 CRI 2700K 120V

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD





Delicately scaled, this elegant pressed crystal pendant features a hand-blown inner white glass diffuser.

LOW-VOLTAGE

with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

■ Wall / P. 492, Bath / P. 494



700	SYST	EM	SAR	COLOR	FINISH	LAM	P
	MO	FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MONO	ORAIL**	C CLEAR	Z ANTIQUE BRONZE C CHROME** S SATIN NICKEL	-24	12 VOLT HALOGEN 24 VOLT HALOGEN

* INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



Pure indulgence, the Sara Grande is cut from a solid block of crystal and formed into an elegant cylinder which surrounds a hand-blown inner white glass diffuser. Instantly elevates any space.

LINE-VOLTAGE

120 volt 60 watt, medium base BT15 lamp / Dimmable with standard incandescent dimmer


120 volt 6.5 watt, 810 delivered lumen, 2700K, medium base LED BT15 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

COMPLEMENTARY PRODUCT

Wall / P. 492, Bath / P. 494



700TDSARGP	COLOR	HARDWARE FINISH	LA
	C CLEAR	3 ANTHOUGH BROWER	


Z ANTIQUE BRONZEB BLACK S SATIN NICKEL W WHITE

-LED827 INCANDESCENT 120V BT15 LED 80 CRI 2700K 120V





Pure indulgence, the Jayden Grande is cut from a solid block of crystal and formed into an elegant rectangular prism which surrounds a hand-blown inner white glass diffuser. Instantly elevates any space.



LINE-VOLTAGE



120 volt 60 watt, medium base BT15 lamp / Dimmable with standard incandescent dimmer

-h- 120 volt 6.5 watt, 810 delivered lumen, 2700K, medium base LED BT15 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

COMPLEMENTARY PRODUCT

■ Wall / P. 495

700TDJDNGP	COLOR	HARDWARE FINISH	LAMP	
	C CLEAR	Z ANTIQUE BRONZE B BLACK S SATIN NICKEL W WHITE	LED827	INCANDESCENT 120V BT15 LED 80 CRI 2700K 120V





Cut crystal cylinder is draped with Le Labo® chain maille from Paris to create a dramatic and unique pendant. Hand-blown inner glass helps diffuse the light.



LOW-VOLTAGE

☐ Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable




700	SYSTEM		MCNC	FI	FINISH		LAMP	
		FREEJACK MONOPOINT* MONORAIL**		_	CHROME** SATIN NICKEL	-24	12 VOLT HALOGEN 24 VOLT HALOGEN	

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL

MO2 TWO-CIRCUIT MONORAIL**



In a unique combination of materials, the large-scale, internationally-inspired blown glass shade is dramatically draped with Le Labo® chain maille from Paris to create a statement piece.



LINE-VOLTAGE

120 volt 75 watt, medium base A19 lamp $\,/\,$ Dimmable with standard incandescent dimmer

-ii- 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

12 feet of field-cuttable cord


T24 LED includes Title 24 Compliant lamp

 700TDMKAP
 COLOR
 HARDWARE FINISH
 LAMP

 W WHITE
 B BLACK 5 SATIN NICKEL W WHITE
 INCANDESCENT 120V A19 LED 90 CRI 2700K 120V



Choice of single or seven clear glass globes with fused center tubes suspended from one central hub.



LOW-VOLTAGE

- (1) or (7) Low-voltage, 10 watt xenon bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- -i- (1) or (7) 3 watt, 500 delivered lumen, 3000K LED modules / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

700	SYSTEM		CHR	TYPE	FII	NISH	LAMP	
	MO	FREEJACK KABLE LITE MONOPOINT* MONORAIL*** TWO-CIRCUIT MONO	RAIL***	1 CHEE 7 CHEE	ERS C	ANTIQUE BRONZE** CHROME*** SATIN NICKEL	-24 -LED930	12 VOLT XENON 24 VOLT XENON 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE AND 7 CHEERS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL





This contemporary spherical glass pendant features a funneled glass detail and provides beautiful omnidirectional illumination while instantly adding a touch of mid-century modern-inspired design.



LOW-VOLTAGE

 $\begin{picture}(100,0) \put(0,0){\line(0,0){100}} \put(0,0){\line(0,0){10$ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)


Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS



70	O SYST	SYSTEM PEL COLOR FINISH		NISH	LAMP			
	FJ	FREEJACK		W WHITE	Z	ANTIQUE BRONZE**		12 VOLT HALOGEN
	MP	MONOPOINT*			C	CHROME***	-24	24 VOLT HALOGEN
	KL	KABLE LITE			S	SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K
	MO	MONORAIL***						
	MO2	TWO-CIRCUIT MONOR	AIL***					

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL

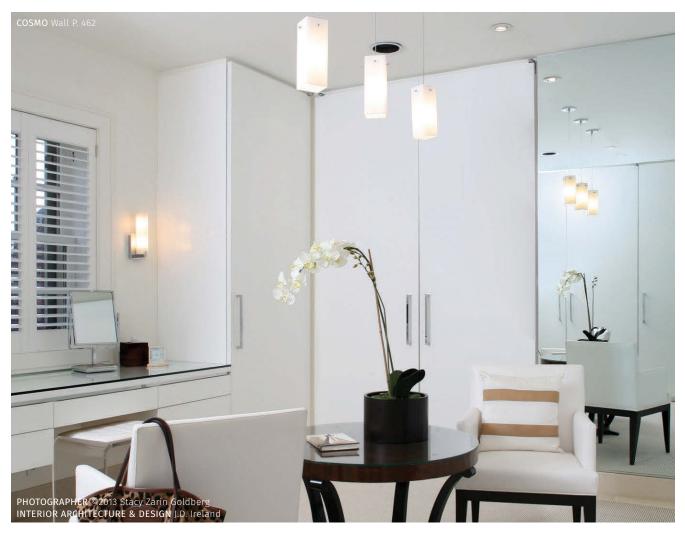

Sleek contemporary style in the form of a tall rectilinear glass shade with four metal bead accents provides beautifully diffused omnidirectional light.



LOW-VOLTAGE

- 🐧 Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS



700	SYSTEM		TETW	FII	NISH	LAMP	
		FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MO	ONORAIL**	C	ANTIQUE BRONZE CHROME** SATIN NICKEL	-24 -LEDS930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL





In a timeless contemporary silhouette, an outer transparent glass cylinder echoes an inner white glass diffusor while high quality metal details complete the look.



LOW-VOLTAGE

- Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Pendants / P. 208, 210, Wall / P. 514

700	SYST	EM	ECP o	OLOR	FINISH	LAMP	
		FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MONO	Q C DRAIL** S	AQUAMARINE	Z ANTIQUE BRONZE C CHROME** S SATIN NICKEL		12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL









In a timeless contemporary silhouette, an outer transparent glass cylinder echoes an inner white glass cylinder to provide a pop of color while softly diffusing the light.

LINE-VOLTAGE



Small: 120 volt 60 watt, mini candelabra base lamp / Dimmable with standard incandescent dimmer

Large: 120 volt 75 watt A19 medium base lamp / Dimmable with standard incandescent dimmer

-h- Large Only: 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS



T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendants / P. 206, 210, Wall / P. 514


700	SYSTEM	ECGP	SIZE	COLOR	HARDWARE FINISH	LAMP	
	TD MONOP TT T-TRAK	POINT	LARGE S SMALL	A AMBER Q AQUAMARINE C CLEAR K SMOKE U STEEL BLUE	Z ANTIQUE BRONZE* B BLACK* S SATIN NICKEL W WHITE	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V (LARGE ONLY)

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD





A tall, outer transparent glass cylinder is suspended by clean metal details as it echoes the elongated inner white glass cylinder which softly diffuses the light.

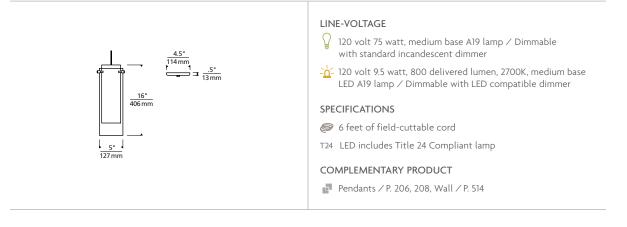

700	SYS	TEM	ECGP	CC	LOR	Н	ARDWARE FINISH	LAMP	
		MONOPO T-TRAK	INT		AMBER AQUAMARINE		ANTIQUE BRONZE* BLACK*	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V
				_	CLEAR	_	SATIN NICKEL		
					SMOKE STEEL BLUE	W	WHITE		

 $^{{}^{\}star}$ antique bronze and black finish only available on TD





A tall transparent glass cylinder envelops a clean, modern socket making the elongated vintage filament lamp central to the contemporary design.



700	SYSTEM	BCNP	COLOR	HARDWARE FINISH	LAMP
	TD MONOR		A AMBER Q AQUAMARINE C CLEAR K SMOKE U STEEL BILLE	Z ANTIQUE BRONZE* B BLACK* S SATIN NICKEL W WHITE	INCANDESCENT 120V

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD





Rich, translucent Murano glass surrounds a small frost raindrop glass.



LOW-VOLTAGE

🐧 Low-Voltage, 35 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Pendant / P. 216


700	SYST	EM	FIR	COLOR	FINISH	LAMP
		FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MONOF	AIL**	A AMBER B COBALT N HAVANA BROWN R RED K SMOKE U STEEL BLUE	Z ANTIQUE BRONZE C CHROME** S SATIN NICKEL	12 VOLT HALOGEN 24 VOLT HALOGEN

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL





Rich translucent glass surrounds a frost glass diffuser.



LINE-VOLTAGE

120 volt 40 watt, G9 base halogen lamp / Dimmable with standard incandescent dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

STEEL BLUE

COMPLEMENTARY PRODUCT

Pendant / P. 214

700	SYS	TEM	FIRGP	C	OLOR	Н	ARDWARE FINISH	LAMP
		MONOPO T-TRAK	TAIC	C N K	AMBER CLEAR HAVANA BROWN SMOKE	B S	ANTIQUE BRONZE* BLACK* SATIN NICKEL WHITE	INCANDESCENT 120V
				- 11	STEEL BLLIE			

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD

SMOKE





Clear glass surrounds a small raindrop glass in frost or a color.



LOW-VOLTAGE

🐧 Low-Voltage, 35 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS



700	SYST	EM	FIRC	CC	DLOR	FII	NISH	LAN	1P
	MO	FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MON	ORAIL**	B F	AMBER COBALT FROST RED	C	ANTIQUE BRONZE CHROME** SATIN NICKEL	-24	12 VOLT HALOGEN 24 VOLT HALOGEN

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



Murano glass with frosted or case glass interior.



LOW-VOLTAGE

- Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- -M- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS



700	SYST	EM	FIRF co	OLOR FIN	NISH	LAMP	
	FJ KL	FREEJACK KABLELITE			ANTIQUE BRONZE** CHROME***	-24	12 VOLT HALOGEN 24 VOLT HALOGEN
	MP	MONOPOINT*			SATIN NICKEL		12 VOLT LED 90 CRI 3000K
		MONORAIL*** TWO-CIRCUIT MONO		RED / WHITE			

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



Patterned Murano glass surrounds a small frost raindrop glass.



LOW-VOLTAGE

Û Low-voltage, 35 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

700	SYST	EM	FIR	COLOR		FINISH		LAMP		
	MP MO	FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MONOR	AIL**	Р	OWL PEACOCK SWAN	C	ANTIQUE BRONZE CHROME** SATIN NICKEL	-24	12 VOLT HALOGEN 24 VOLT HALOGEN	

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



A colorful twist on our popular Fire pendant with brilliant frit glass.



LOW-VOLTAGE

- Û Low-voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- -h- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

700	SYSTEM		FIRY	COLOR		NISH	LAMP		
	FJ KL MP MO	FREEJACK KABLE LITE MONOPOINT* MONORAIL***		A TAHOE PINE AMBER W WHITE FRIT	C	ANTIQUE BRONZE** CHROME*** SATIN NICKEL		12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K	

MO2 TWO-CIRCUIT MONORAIL***

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



Hand-blown glass with an elegant fused swirl topped with metal detail.



LOW-VOLTAGE

☐ Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)


SPECIFICATIONS

700	SYST	EM	NEBL	COLOR FINISH		NISH	LAMP	
	MO	FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT MON	IORAIL	A AMBER K SMOKE W WHITE		ANTIQUE BRONZE SATIN NICKEL		12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH



Sleek glass shade infused with bubbles, suspended from a round canopy.



LINE-VOLTAGE

20 volt 75 watt, A19 medium base lamp / Dimmable with standard incandescent dimmer

-i- 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Accessory / P. 590

700	SYSTEM SDA	LP COLOR	HARDWARE FINISH	LAMP	
	TD MONOPOINT TT T-TRAK	A AMBER F FROST	Z ANTIQUE BRONZE* B BLACK* S SATIN NICKEL W WHITE	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V

 $^{{}^{\}star}$ antique bronze and black finish only available on TD



The outer glass cylinder is meticulously etched and finished by hand in an artisan process. It surrounds an inner blown white glass diffuser which adds great visual depth and helps to showcase the carvings.



700	SYST	SYSTEM		COLOR	FINISH	LAM	IP
	FJ	FREEJACK		A AMBER	Z ANTIQUE BRONZE**		12 VOLT HALOGEN
	KL	KABLE LITE		K SMOKE	C CHROME***	-24	24 VOLT HALOGEN
	MP	MONOPOINT*		W WHITE	S SATIN NICKEL		
	MO	MONORAIL***					
	MO2	TWO-CIRCUIT MONO	RAIL***				

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



Clean, modern cylindrical glass shade is topped with a simple metal cap detail.

LOW-VOLTAGE

- Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT



700	SYST	EM	MHUD	COLOR	FI	NISH	LAMP		
	FJ	FREEJACK		W WHITE	Z	ANTIQUE BRONZE**		12 VOLT HALOGEN	
	KL	KABLE LITE			C	CHROME***	-24	24 VOLT HALOGEN	
	MP	MONOPOINT*			S	SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K	
	110	A ACATOR ATTACA							

- MO2 TWO-CIRCUIT MONORAIL***
- * INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
 ** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
 *** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



Clean pure style with presence is created as this long cylindrical glass shade is topped with a simple metal cap detail, suspended from a round canopy.

LINE-VOLTAGE

120 volt 75 watt, A19 medium base lamp / Dimmable with standard incandescent dimmer

-120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

■ Wall / P. 508 15.8" 400 mm 4.8" 122 mm

700	SYS	TEM	м HUDP сог		HARDWARE FIN		LAMP	
	TD	MONOPO	TAIC	W WHITE	Z	ANTIQUE BRONZE*		INCANDESCENT 120V
	TT	T-TRAK			В	BLACK*	-LED927	A19 LED 90 CRI 2700K 120V
					S	SATIN NICKEL		
					W	WHITE		

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD



A cylindrical shade is composed of glass mosaic tiles and surrounds an inner frost glass diffuser.




LOW-VOLTAGE

Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS



700	SYSTEM		PEY	COLOR	FINISH	LAMP		
		FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MONO	ORAIL**	W WHITE	Z ANTIQUE BRONZE C CHROME** S SATIN NICKEL		12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K	

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



The cylindrical shade with crushed glass texture is accented with an inner layer of gold or silver.



LOW-VOLTAGE

- Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- -M- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS



700	SYSTEM		VEI	OUTER / INNER	FINISH	LAMP	AMP		
	FJ MP	FREEJACK MONOPOINT*		N BROWN/GOLD L LATTE/GOLD	Z ANTIQUE BRONZE C CHROME**	-24	12 VOLT HALOGEN 24 VOLT HALOGEN		
	MO MO2	MONORAIL** TWO-CIRCUIT MONO	RAIL**	W WHITE/SILVER	S SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K		

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



An elegant shade is composed of natural shell panels which are meticulously polished and carefully adhered by hand.

LOW-VOLTAGE

- Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- -h- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

■ Wall / P. 512



700	SYSTEM		PLA	COI	LOR	FIN	NISH	LAMP	LAMP		
	FJ	FREEJACK		В	BROWN	Z	ANTIQUE BRONZE**		12 VOLT HALOGEN		
	KL	KABLE LITE		N 1	NATURAL	C	CHROME***	-24	24 VOLT HALOGEN		
	MP	MONOPOINT*		W١	WHITE	S	SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K		
	840	A 40 NIOD A II +++									

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL

MO2 TWO-CIRCUIT MONORAIL***



The elegant multi-toned shade is composed of natural shell panels that are burnished to remove rough edges, meticulously polished, cut to size, and carefully adhered by hand to an inner glass cylinder.

LINE-VOLTAGE

120 volt 60 watt, medium base A19 lamp / Dimmable with standard incandescent dimmer

-i- 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with LED compatible dimmer


SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

■ Wall / P. 512



700	SYST	EM	PLAP	CC	DLOR	Н	ARDWARE FINISH	LAMP	
		MONOPOI T-TRAK	INT	N	BROWN NATURAL WHITE	B S	ANTIQUE BRONZE* BLACK* SATIN NICKEL WHITE	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD





Individual slumped glass panels precisely joined by a hand-assembled metal frame create a warm yet contemporary look inspired by the arts and crafts period of the late 19th century.



LOW-VOLTAGE

Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

■ Wall / P. 520


700	SYSTEM		ESX	COLOR	FINISH	LAMP	1P			
		FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT MON		A BEACH AMBER S SAND	Z ANTIQUE BRONZE S SATIN NICKEL	-24 -LEDS930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K			

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH





A natural hemp fabric shade with recycled paper backing is topped with recycled sand-cast bronze metal work.



LOW-VOLTAGE

Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

■ Wall / P. 522


700	SYSTEM		BORI	FIN	NISH	LAMP			
	FJ KL	FREEJACK KABLE LITE			ANTIQUE BRONZE** CHROME***	-24	12 VOLT HALOGEN 24 VOLT HALOGEN		
	MP MONOPOINT* MO MONORAIL*** MO2 TWO-CIRCUIT MON			S	SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K		

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL





Modern, simple round fabric shade with glass diffuser provides a glare free wash of light; highlighted with metal detail.



LOW-VOLTAGE

(2) Low-Voltage, 35 watt halogen bi-pin lamps / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

Pendant / P. 236, Ceiling / P. 382

700	SYST	EM	MUL	COLOR	FINI	ISH	LAN	IP
		FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MON	NORAIL**	W WHITE	C	ANTIQUE BRONZE CHROME** SATIN NICKEL	-24	12 VOLT HALOGEN 24 VOLT HALOGEN

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL








DESERT CLAY

Short fabric drum shade suspended from a round canopy has a glass diffuser which provides a glare free wash of light.



LINE-VOLTAGE

(4) 120 volt 75 watt, A19 medium base lamps / Dimmable with standard incandescent dimmer

-<u>h</u>- (4) 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamps / Dimmable with LED compatible dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 234, Ceiling / P. 382

70	0 sy:	STEM	MULP	COLOR	HA	ARDWARE FINISH	LAMP		
		MONOP T-TRAK	OINT	C DESERT CLAY W WHITE	B S	ANTIQUE BRONZE* BLACK* SATIN NICKEL WHITE	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V	

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD





A sophisticated combination of fabric and wood, expert craftsmanship exudes a rich, warm aesthetic.

LOW-VOLTAGE

Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT



700	SYSTEM		TPO	COLOR	TRIM	FINISH	LAMP	
	FJ	FREEJACK		Y HEATHER GRAY	M MAPLE	Z ANTIQUE BRONZE**		12 VOLT HALOGEN
	KL	KABLE LITE		W WHITE	W WALNUT	C CHROME***	-24	24 VOLT HALOGEN
	MP	MONOPOINT*				S SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K
	MO	MONORAIL***						
	MO2	TWO-CIRCUIT MONO	RAIL***					

- * INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
- ** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
 *** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



LINE-VOLTAGE



(4) 120 volt 75 watt, A19 medium base lamps / Dimmable with standard incandescent dimmer


-i- (4) 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamps / Dimmable with LED compatible dimmer

SPECIFICATIONS

Canopy includes integrated hang straight / must specify stem length at the time of ordering

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT





HEATHER GRAY / WALNUT



WHITE / MAPLE

700TPO LENGTH (A) 24 24"

36 36'

48 48"

Y HEATHER GRAY W WHITE

SHADE COLOR

WOOD TRIM M MAPLE W WALNUT


HARDWARE FINISH **Z** ANTIQUE BRONZE N POLISHED NICKEL S SATIN NICKEL

INCANDESCENT 120V -LED927 A19 LED 90 CRI 2700K 120V





Large fabric drum shade suspended from a round canopy. Glass diffuser provides a glare free wash of light.

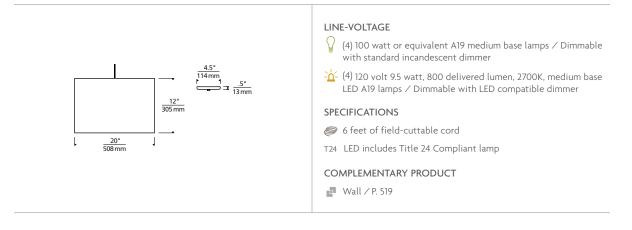

700TDATCGP	SYS	STEM	LEXP	COL	OR	Н	ARDWARE FINISH	LAMP	
		MONOPO T-TRAK	INT	B C R WI	BLACK DESERT CLAY RED WASHABLE IVORY	B S	ANTIQUE BRONZE* BLACK* SATIN NICKEL WHITE	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V

^{*} ANTIQUE BRONZE AND BLACK FINISH ONLY AVAILABLE ON TD





A cylinder shaped shade, constructed of Indian silk with hand-rolled edges, beautifully and softly diffuses the light.



LOW-VOLTAGE

û Low-Voltage, 50 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS




700	SYST	EM	FAB	COLOR	FII	NISH	LAMP			
	FJ KL	FREEJACK KABLE LITE		A ALMOND W WHITE		ANTIQUE BRONZE** CHROME***	-24	12 VOLT HALOGEN 24 VOLT HALOGEN		
		MONOPOINT*			S	SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K		
		MONORAIL*** TWO-CIRCUIT MONOR	RAIL***							

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



A translucent organza drum shade surrounds an inner glass cylinder to provide a soft wash of light.

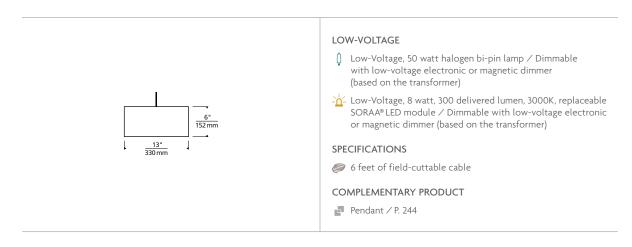


700	SYST	EM	MDLNW	CO	LOR	FINISH LAMP		LAMP	
	MO	FREEJACK MONOPOINT MONORAIL** TWO-CIRCUI				C	ANTIQUE BRONZE CHROME** SATIN NICKEL		12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL




A large translucent organza drum shade surrounds an inner glass cylinder to provide a soft wash of light.

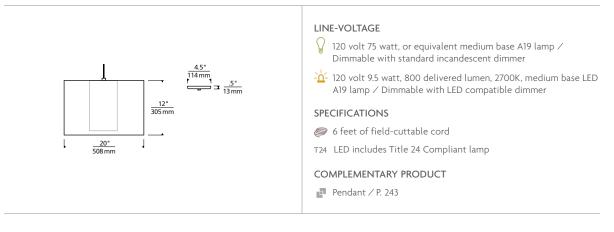

700	SYSTEM DLNPW	COLOR	HARDWARE FINISH	LAMP			
	TD MONOPOINT TT T-TRAK	N BROWN W WHITE	Z ANTIQUE BRONZE* B BLACK* S SATIN NICKEL W WHITE	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V		

 $^{{}^{\}star}$ antique bronze and black finish only available on TD



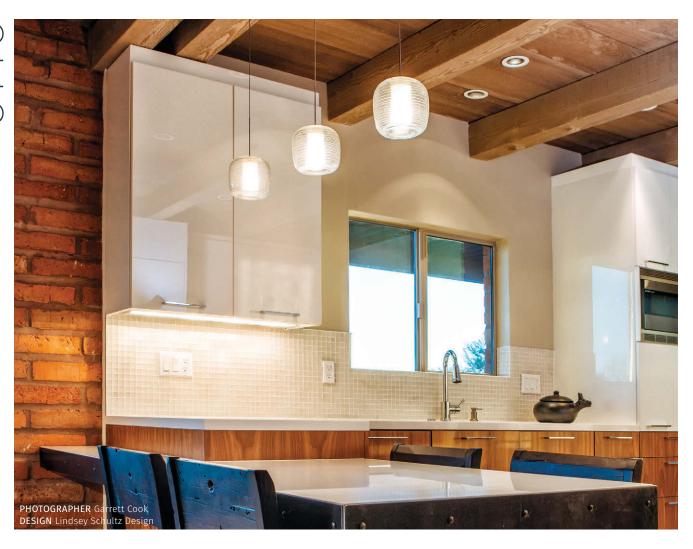

This stunning hand-etched, mouth blown outer transparent glass shade features an inner glass diffuser.



MO2 TWO-CIRCUIT MONORAIL**

700 SYSTEM

FJ FREEJACK
MP MONOPOINT*
MO MONORAIL**

ОТО

COLOR


M AMETHYST C CLEAR
K SMOKE
U STEEL BLUE

FINISH

Z ANTIQUE BRONZE C CHROME** S SATIN NICKEL

12 VOLT HALOGEN 24 VOLT HALOGEN

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL

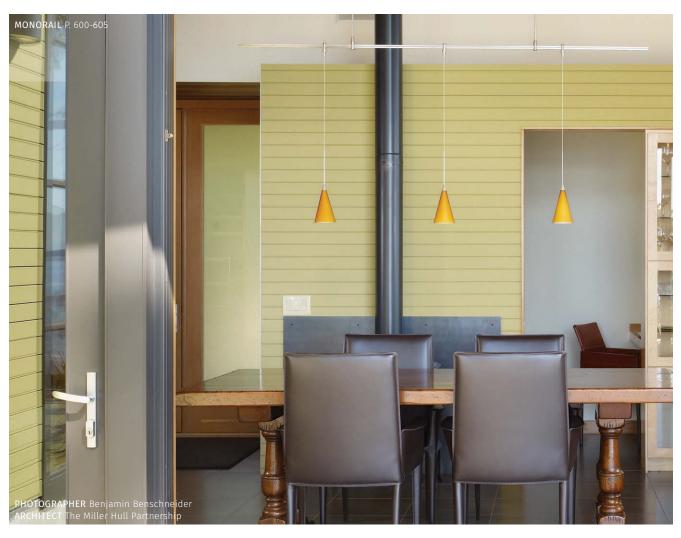

Case glass cone available in several colors has a reflective white interior.



700	SYSTEM		CON	COLOR		FINISH		LAMP	
	FJ	FREEJACK		Α	AMBER	Z	ANTIQUE BRONZE**		12 VOLT HALOGEN
	KL	KABLE LITE		Р	COBALT	C	CHROME***	-24	24 VOLT HALOGEN
	MP	MONOPOINT*		R	RED	S	SATIN NICKEL	-LEDS930	12 VOLT LED 90 CRI 3000K
	MO	MONOPAII***		1/1/	\A/LITE				

MO2 TWO-CIRCUIT MONORAIL***

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



The craftsman-style four-sided seeded glass shade is nicely contrasted by the black metal frame, while a white inner shade diffuses the lamp.





or magnetic dimmer (based on the transformer) **SPECIFICATIONS**

LOW-VOLTAGE

6 feet of field-cuttable cable

(based on the transformer)

Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer

- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic



700	SYSTEM		OAKB	COLOR		FIN	NISH	LAMP	
	K MO	FREEJACK MONOPOINT* KABLE LITE MONORAIL*** TWO-CIRCUIT MON	NORAIL***		LEAR	C	ANTIQUE BRONZE** CHROME*** SATIN NICKEL	-24 -LEDS930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



Inspired by a vintage lamp socket, it includes an integral on / off switch for a touch of functional style.



LINE-VOLTAGE

20 volt 40 watt medium base, Classic Edison lamp / Dimmable with standard incandescent dimmer

-<u>h</u>- 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED Squirrel Cage lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

6 feet of field-cuttable cord

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Ceiling / P. 387




600CLKP COLOR

C CLEAR

HARDWARE FINISH LAMP

Z ANTIQUE BRONZEN POLISHED NICKELS SATIN NICKEL

INCANDESCENT
-LED922 ST19 LED 90 CRI 2200K 120V
-LED927 ST19 LED 90 CRI 2700K 120V

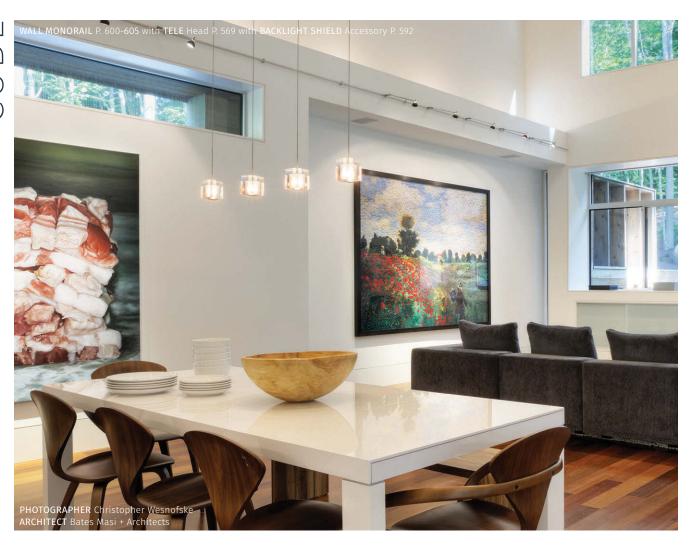

Classic geometric cube made of pressed glass makes a simple, modern statement.



LOW-VOLTAGE

Û Low-Voltage, 35 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

■ Wall / P. 496



700	SYST	EM	CUB	COLOR	FINISH	LAMP				
	FJ KL MP MO MO2	FREEJACK KABLE LITE MONOPOINT* MONORAIL*** TWO-CIRCUIT MONO	RAIL***	A AMBER F FROST	Z ANTIQUE BRONZE** C CHROME*** S SATIN NICKEL	-24	12 VOLT HALOGEN 24 VOLT HALOGEN			

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



This rectangular pressed glass shade makes a simple, modern statement.



LOW-VOLTAGE

- Low-Voltage, 35 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)
- Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

■ Wall / P. 496



700	SYST	EM	SLD	COLOR	FII	NISH	LAMP			
	FJ	FREEJACK		A AMBER	Z	ANTIQUE BRONZE		12 VOLT HALOGEN		
	MP	MONOPOINT*		F FROST	C	CHROME**	-24	24 VOLT HALOGEN		
	840	MACNIOR ALL **			c	CATINIAUCKEI	LEDCORO	12 VOLT LED 00 CBI 2000K		

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL

MO2 TWO-CIRCUIT MONORAIL**



Natural onyx cylinder provides a warm textured look as the light shines through the stone shade.



LOW-VOLTAGE

Û Low-Voltage, 50 watt halogen bi-pin lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

Low-Voltage, 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)


SPECIFICATIONS

6 feet of field-cuttable cable



700	SYST	EM	CBO	FII	NISH	LAMP				
		FREEJACK MONOPOINT* MONORAIL** TWO-CIRCUIT MON	ORAIL**	C	ANTIQUE BRONZE CHROME** SATIN NICKEL	-24 -LEDS930	12 VOLT HALOGEN 24 VOLT HALOGEN 12 VOLT LED 90 CRI 3000K			

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL

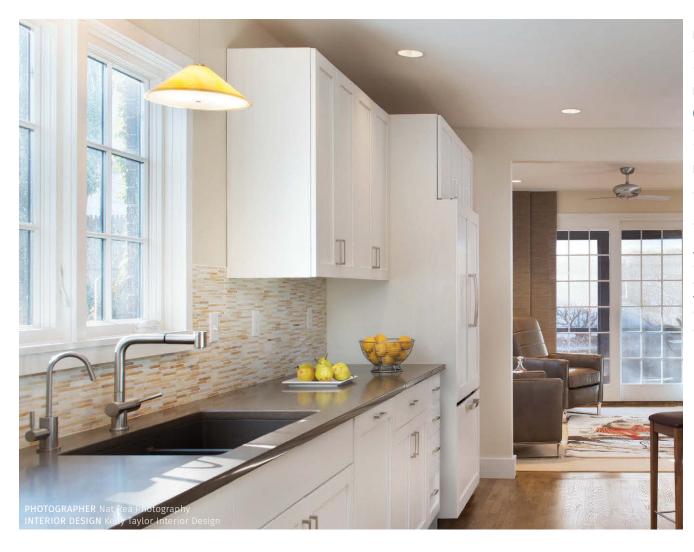

Fused and slumped plate glass shade, warm with color and pattern, is highlighted with metal details. Glass disc diffuser provides glare free light.



LOW-VOLTAGE


 $\ensuremath{\mathring{\square}}$ Low-Voltage, 35 watt halogen bi-pin lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable


COMPLEMENTARY PRODUCT

■ Wall / P. 516



700 s	STEM	LRK COLOR	FINISH	LAMP
	FREEJACK P MONOPOINT* O MONORAIL** OZ TWO-CIRCUIT MON	S SANE	Z ANTIQUE C CHROME S SATIN NO	** -24 24 VOLT HALOGEN

^{*} Includes 4" round flush canopy in coordinating finish ** chrome is not available for monorail or two-circuit monorail

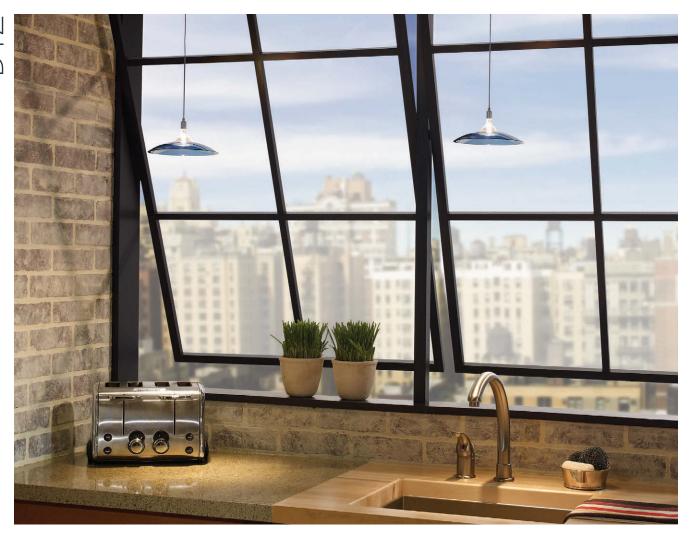

Transparent slumped glass plate floats around the exposed, secured MR16. May be mounted up or down.



LOW-VOLTAGE

Û Low-Voltage, 50 watt MR16 lamp ∕ Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

$$\frac{1^{\circ}}{\frac{6.8^{\circ}}{173\text{mm}}} \longrightarrow \frac{1^{\circ}}{25\,\text{mm}} \longrightarrow \frac{1^{\circ}}{\frac{6.8^{\circ}}{173\text{mm}}} \longrightarrow \frac{1^{\circ}}{25\,\text{mm}}$$

700	SYST	EM	DIZ	COLOR	FINISH	LAN	LAMP		
	FJ KL	FREEJACK KABLE LITE		C CLEAR N HAVANA BROWN	Z ANTIC	QUE BRONZE**	12 VOLT HALOGEN 24 VOLT HALOGEN		
	MP	MONOPOINT*		U STEEL BLUE	S SATIN	NICKEL			

MO2 TWO-CIRCUIT MONORAIL***

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL



Transparent glass disk floats around the exposed, secured MR16.

LOW-VOLTAGE

Low-Voltage, 50 watt MR16 lamp / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

$$\frac{\frac{6.3"}{160mm}}{\frac{160mm}{3mm}} \rightarrow \frac{0.1"}{3mm}$$

700	SYST	EM	BIZ	COLOR	FI	NISH	LAN	1P
	FJ	FREEJACK		C CLEAR	Z	ANTIQUE BRONZE**		12 VOLT HALOGEN
	K	KABLE LITE		N HAVANA BROWN	C	CHROME***	-24	24 VOLT HALOGEN
	MP	MONOPOINT*		U STEEL BLUE	S	SATIN NICKEL		
	MO	MONORAIL***						
	MO2	TWO-CIRCUIT MONOR	AIL***					



† ACCESSORY SOLD SEPARATELY

Stylish pendant to customize with Round, Cone, Cone Onyx, Soda, or Prism Glass Shield, Belladonna, Bell, or Tinkerbell with integrated louver lens holder accessory. Accessory required; sold separately (P. 588-593).

LOW-VOLTAGE

Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

6 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

■ Head / P. 550



700	SYS	TEM	TRPN	FI	NISH
	FJ	FREEJACK		Z	ANTIQUE BRONZI

KABLE LITE MP MONOPOINT*
MO MONORAIL*** MO2 TWO-CIRCUIT MONORAIL*** C CHROME*** S SATIN NICKEL

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
**** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL

^{*} INCLUDES 4" ROUND FLUSH CANOPY IN COORDINATING FINISH
** ANTIQUE BRONZE IS NOT AVAILABLE FOR KABLE LITE
*** CHROME IS NOT AVAILABLE FOR MONORAIL OR TWO-CIRCUIT MONORAIL










Undeniable beauty excludes from this broadly appealing design in which contrasting elements converge. Its modern and retro influences create a distinctively elegant look while its ultra-thin yet durable borosilicate glass globes and retro inspired LED lamps project an incredibly comforting warmth.

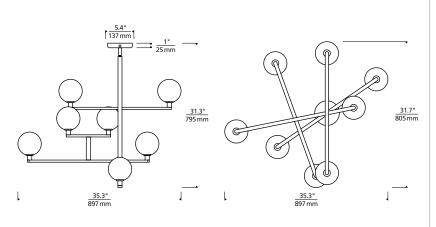

LAMPING

(8) 120 volt 2 watt, 160 delivered lumen (1280 total delivered lumens), 2200K or 2700K, E12 base LED vintage tubular lamps / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

60" of variable rigid stems with coordinating finish

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT


Chandelier / P. 260, Wall / P. 400

700GMB	SH	ADE COLOR	Н	ARDWARE FINISH	LAMP			
	C	CLEAR	R	AGED BRASS	-LED922	T6 LED 90 CRI 2200K 120V		
			5	SATIN NICKEL	-I FD927	T6 LED 90 CRI 2700K 120V		





Modern and retro influences collide to create a distinctively elegant chandelier. To ensure years of enjoyment, yet durable borosilicate glass globes are utilized to house retro radio tube-inspired LED lamps for a warm, inviting feel.



LAMPING

-i-(3), (7) or (19) 120 volt 2 watt, 160 delivered lumen, 2200K or 2700K, E12 base LED vintage tubular lamps / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

 ∅ 10 feet of field-cuttable black cloth cord / 19-lite includes optional cord collar in coordinating finish

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Chandelier / P. 258, Wall / P. 400

700GMBMP	SIZE			ADE COLOR	HA	ARDWARE FINISH	LAMP		
	-	3-LITE PENDANT 7-LITE PENDANT	С	CLEAR	•••	AGED BRASS SATIN NICKEL		T6 LED 90 CRI 2200K 120V T6 LED 90 CRI 2700K 120V	
	19	19-LITE PENDANT							





11-LITE / SATIN NICKEL WITH BLACK CORD

CORD COLOR OPTIONS
























An elegant sphere of pure optic crystal is laser etched to create a mysterious yet beautiful orb floating within. When illuminated by the downward-firing LED hidden within the socket, the orb glows brilliantly while the fixture provides a bounty of task light on surfaces below.



LAMPING

-id- 9 watt, 135 delivered lumen, 3000K, 2200K or 3000K-2200K warm-color dimming LED module / Dimmable with low-voltage electronic or triac dimmer


SPECIFICATIONS

12 feet of field-cuttable cloth cord

COMPLEMENTARY PRODUCT

Pendant / P. 104

700TDMINAP	SIZE	COLOR	CORD COLOR	HARDWARE FINISH	LAMP
	1 1-LITE 3 3-LITE CHANDEUER 7 7-LITE CHANDEUER 11 11-LITE CHANDELIER	C CLEAR	B BLACK WHITE U BLUE N BROWN P COPPER F FUSCIA Y GRAY O ORANGE R RED T TEAL W WHITE	B BLACK S SATIN NICKEL	-LEDWD LED 90 CRI WARM COLOR DIMMING 3000-2200K 120 -LED922 LED 90 CRI 2200K 120V -LED930 LED 90 CRI 3000K 120V

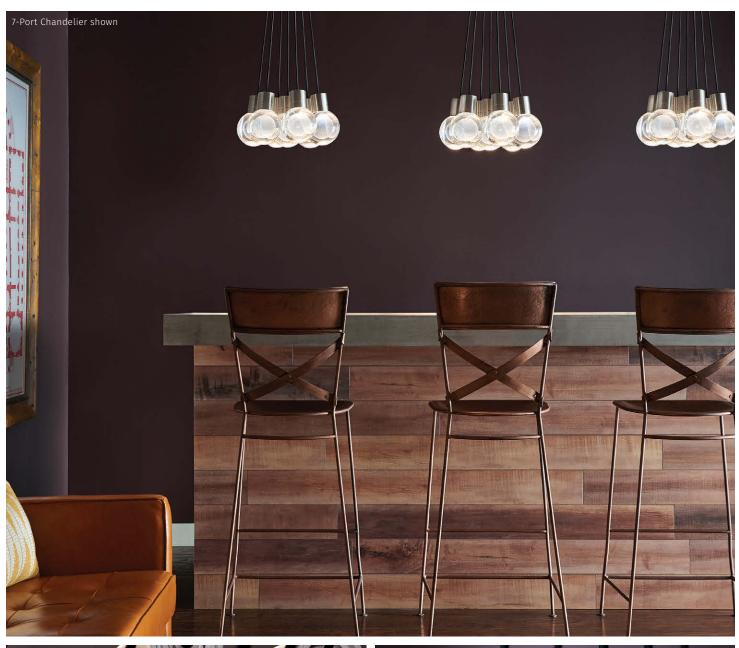









3-LITE / BLACK WITH GRAY CORD

11-LITE / SATIN NICKEL WITH BLUE CORD

CORD COLOR OPTIONS
























The classic Edison-style Squirrel Cage lamp is reincarnated as a modern socket and cord-style LED pendant. A powerful downward-firing LED is smartly hidden within the "socket" then combined with a solid "bulb" of pure optic crystal. Intricately detailed "filaments" are laser-etched into the crystal for a visually intriguing fixture.



LAMPING

-ir 9 watt, 135 delivered lumen, 3000K, 2200K or Warm Color Dimming 3000K-2200K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

12 feet of field-cuttable cloth cord

COMPLEMENTARY PRODUCT

Pendant / P. 105

700TDALVPMC	SI	ZE	CC	ORD COLOR	Н	ARDWARE FINISH	LAMP	
	7	1-LITE 3-LITE CHANDELIER 7-LITE CHANDELIER 11-LITE CHANDELIER	I U N P F Y O R T	BLACK BLACK & WHITE BLUE BROWN COPPER FUSCIA GRAY ORANGE RED TEAL WHITE	_	BLACK SATIN NICKEL	-LEDWD -LED922 -LED930	LED 90 CRI WARM COLOR DIMMING 3000-2200K 120V LED 90 CRI 2200K 120V LED 90 CRI 3000K 120V










Available in three sizes, this clean, circular accessory adds dimension and scale as it frames Tech Lighting's simple socket and cord style pendants including Mina, SoCo and Alva (sold separately).

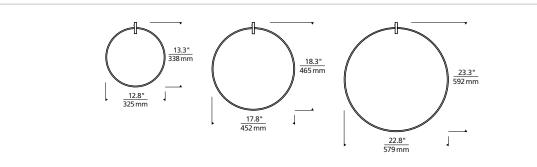

700LOCUSR SIZE HARDWARE FINISH 13 13* SMALL R. AGED BRASS 18 18* MEDIUM B. BLACK 23 23* LARGE S. SATIN NICKEL W WHITE






TRANSPARENT SMOKE / SATIN NICKEL TRIPLE

Best described as a deconstructed modern chandelier, four glass orbs featuring gradually thickening interior bands are extended in opposing directions from the sleek central hub via contrasting textured cloth cords to make a distinctly alluring visual statement.

700SDNMP	SIZE			HADE COLOR	HA	ARDWARE FINISH	LAMP		
		SINGLE CHANDELIER DOUBLE CHANDELIER	_	CLEAR TRANSPARENT SMOKE		AGED BRASS SATIN NICKEL		T14 LED 90 CRI 2200K 120V T14 LED 90 CRI 2700K 120V	
	L3	TRIPLE CHANDELIER							



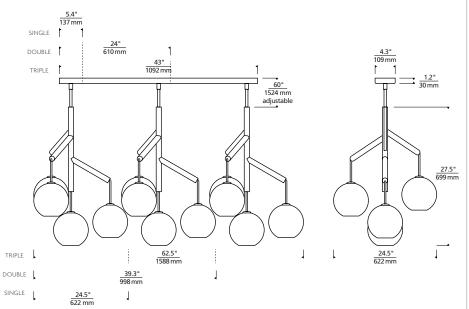

LAMPING

- 120 volt 3.5 watt, 300 delivered lumen, 2200K or 2700K, medium base LED vintage radio lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

60" of variable rigid stems with coordinating finish
Each pendant includes 1 foot of black cloth cord


T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendants / P. 90, 91, Wall / P. 399




With a rare cohesion of sophisticated styling, dramatic flair and impactful scale, nine thoughtfully arranged clusters comprised of 45 individual frosted glass globes which smoothly diffuse the LED light for an unmistakably high-end modern chandelier.

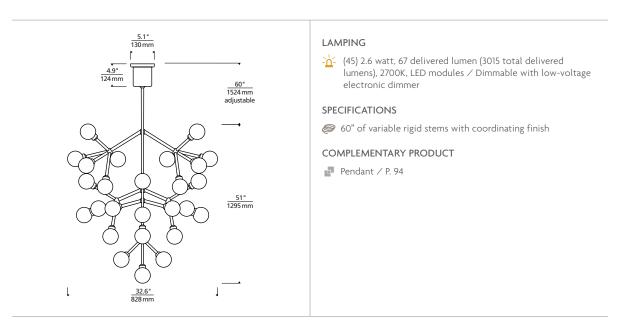





With a rare cohesion of sophisticated styling, dramatic flair and impactful scale, five thoughtfully arranged clusters comprised of 25 individual frosted glass globes which smoothly diffuse the LED light for an unmistakably high-end modern chandelier.

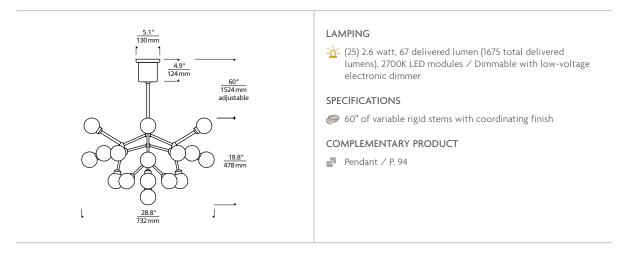


 700MRA
 SHADE COLOR
 HARDWARE FINISH
 LAMP

 W
 WHITE
 R
 AGED BRASS S SATIN NICKEL
 -LED927
 LED 90 CRI 2700K 120V



As a fresh interpretation of the modern chandelier, five arms each feature a cluster of five glass spurs dramatically extending in opposing directions, each illuminated by a compact, diffused LED light source.

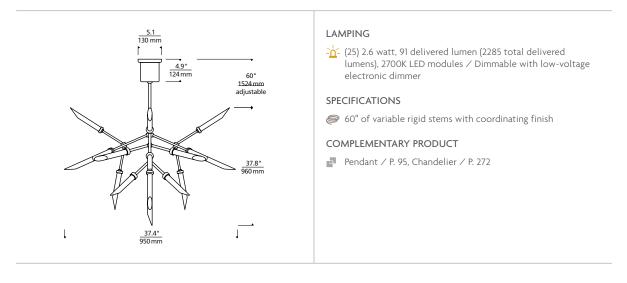

 700SPR
 SHADE COLOR
 HARDWARE FINISH
 LAMP


 F
 FROST
 R
 AGED BRASS AGEN BRASS SATIN NICKEL
 -LED927
 LED 90 CRI 2700K 120V



As a fresh interpretation of a grand modern chandelier, nine arms each feature a cluster of five glass spurs dramatically extending in opposing directions, each illuminated by a compact, diffused LED light source.

700SPRG	SHADE COLOR	HARDWARE FINISH	LAMP	
	F FROST	R AGED BRASS	-LED927	LED 90 CRI 2700K 120V





LAMPING


-1- (45) 2.6 watt, 91 delivered lumen (4113 total delivered lumens), 2700K, LED modules / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

60" of variable rigid stems with coordinating finish

COMPLEMENTARY PRODUCT

Pendant / P. 95, Chandelier / P. 274

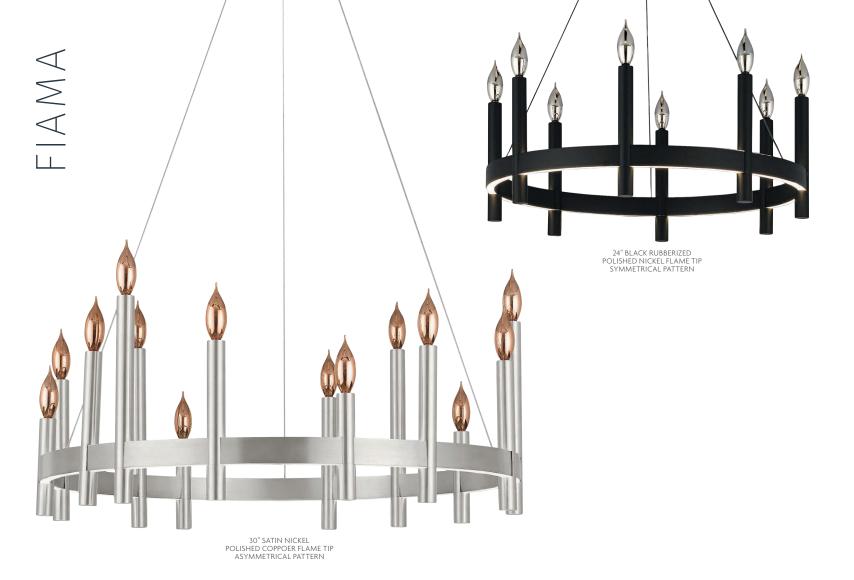

HOW TO BUILD YOUR FIAMA CHANDELIER

1 SELECT THE FIXTURE RING STYLE & FINISH

STYLE: 24" Single Tier, 36" Single Tier **FINISH:** Black Rubberized, Satin Nickel or White Rubberized For a minimalist aesthetic, you may stop after Step 1. To add candle accessories, continue to Step 2.




HEIGHT: 9", 12" or 15" **COLOR:** Black Rubberized, Satin Nickel or White Rubberized

The Fiama looks equally stunning when selecting a single size for all of the bases or when utilizing all three sizes on the same ring. Match the color of the candle base to the chandelier body to achieve a consistent aesthetic or mix finishes for a more eclectic look.

3 SELECT THE FLAME TIP COLOR & PLACE THE CANDLE ACCESSORIES

Polished Copper or Polished Nickel

Either flame tip looks dazzling with any candle color. The copper adds a layer of warmth while the nickel contributes a cool elegance. Layout the candle accessories along the ring at any interval. Place them symmetrically for a cohesive look or asymmetrically for a more thought-provoking aesthetic. Each candle simply threads together to secure, so feel free to move them around until the design feels perfect.

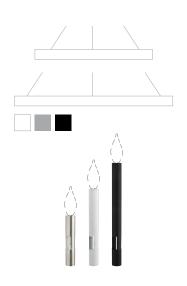







30" WHITE RUBBERIZED

A slender metal ring houses gently diffused upward and downward firing LEDs to provide functional light to an ultra-chic aesthetic. Three sizes of optional candle accessories are available to adorn the fixture. Multiple fixture and accessory finish options provide the opportunity to create a truly customized fixture.

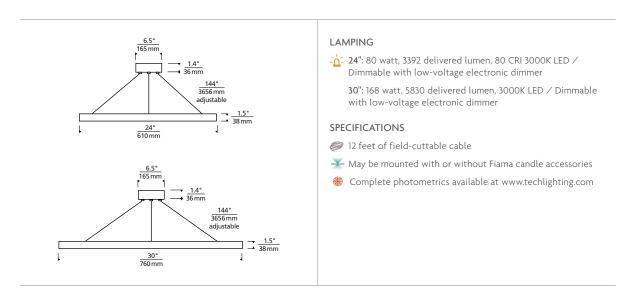

Optional candle accessories for the Fiama. Available in two sizes, three finishes and two flame colors to empower designers to create a truly custom look for ultra-chic spaces. Accessories thread over any Fiama fixture's ring at any interval for nearly unlimited customization opportunity.

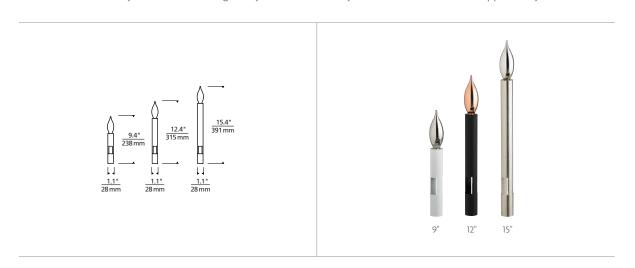


700FIA LENGTH BASE FINISH FLAME COLOR

09 9" B BLACK RUBBERIZED P POLISHED COPPER
12 12" S SATIN NICKEL N POLISHED NICKEL
15 15" W WHITE RUBBERIZED



Dozens of machined metal rods are duplicated and painstakingly fastened at perfectly spaced intervals to form an incredible, multidimensional shade. At its core, light emanates from its smoothly diffused LED source to illuminate this significant piece inspired by mid-century modern design.

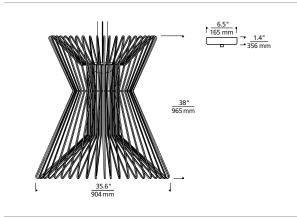

LINE-VOLTAGE

-i- 17 watt, 881 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic, triac or 0-10v dimmer

SPECIFICATIONS

Matte Black Finish: 12 feet of field-cuttable black cloth cord Satin Gold Finish: 12 feet of field-cuttable cord

COMPLEMENTARY PRODUCT

LAMP

Pendant / P. 48, Chandelier / P. 278

700TDSYRGP SHADE COLOR / HARDWARE FINISH

B MATTE BLACK
G SATIN GOLD

-LED930 LED 90 CRI 3000K 120V






The scale of this piece will truly transform a space. A sculptural metal frame whose arms elegantly represent the path the light is taking is surrounded by a modern, high-gloss, semi-translucent shade which allows light to playfully bounce around the fixture and enables just a hint of the light source itself to shine through.

700TDATCGP	OUTER / INNER SHADE COLOR		CORD COLOR	CAGE FINISH	CANOPY	LAMP
	BG BS	GLOSS BLACK / GOLD GLOSS BLACK / SILVER	B BLACK Y GRAY	S SATIN NICKEL	S SATIN NICKEL	-INC INCANDESCENT SQUIRREL CAGE 120V -PAR HALOGEN PAR301 120V
	WG	GLOSS WHITE / GOLD	1 GIVAI			-LED LED PAR30L 80 CRI 3000K 120V



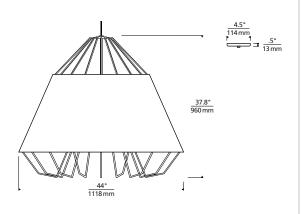

LINE-VOLTAGE

- (3) 120 volt 60 watt, medium base S21 Squirrel Cage lamps / Dimmable with standard incandescent dimmer
- 120 volt 60 watt medium base halogen PAR 30 long lamp / Dimmable with standard incandescent dimmer
- -i- 120 volt 13 watt medium base LED 3000K PAR 30 long lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

12 feet of field-cuttable cloth cord

COMPLEMENTARY PRODUCT


Pendants / P. 150, 152



Overlapping panes of gently slumped glass shield a smoothly diffused LED ring. Two diameter options plus coordinating wall sconces enable scaling from residential dining and media rooms to commercial hospitality and corporate spaces.

700STR	SIZE	GL	GLASS COLOR / HARDWARE FINISH		LAMP	
	24 24"	FS	FROST / SATIN NICKEL	-LED927	LED 90 CRI 2700K 120V - 277V UNV	
	30 30"	KB	SMOKE / BLACK			



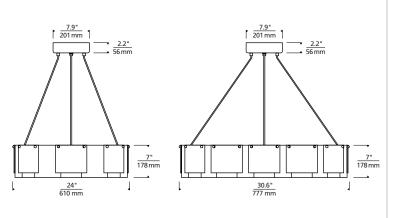

LAMPING

24" Diameter: 120-277 universal voltage, 30 watt, 1900 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic, triac or 0-10v dimmer

30" Diameter: 120-277 universal voltage, 50 watt, 3142 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic, triac or 0-10v dimmer

SPECIFICATIONS


12 feet of field-cuttable cable

COMPLEMENTARY PRODUCT

■ Wall / P. 398



Inspired by large medieval cast iron chandeliers, a thick outer metal ring houses dual stacked rows of inward firing LEDs which are treated with a special linear spread diffuser to create a unique twinkling effect while evenly distributing the light and minimizing glare.

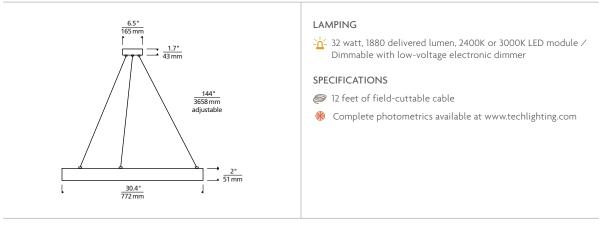

 700BOD
 SIZE
 HARDWARE FINISH
 LAMP


 30 30°
 Z ANTIQUE BRONZE
 -LED824
 LED 2400K 80 CRI 120V

 5 SATIN NICKEL
 -LED830
 LED 3000K 80 CRI 120V





The ultra-modern Zhane Trio suspension has three straight, softly sculpted, tapered extensions that diverge from the middle in opposite directions. Sleek and elegant, this piece features a bottom acrylic diffuser which provides a glare-free wash of light from the LED light source in each of the three arms.



LAMPING

-ii 30 watt, 1800 total delivered lumen, 3000K LED module ∕ Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

6 feet of field-cuttable cloth cord and aircraft cable

COMPLEMENTARY PRODUCT

Linear Suspension / P. 334

700ZHNT HARDWARE FINISH		LAMP			
		В	BLACK RUBBERIZED	-LED	LED 80 CRI 3000K 120V
		ς	SATINI NICKEI	-I FD277	LED 80 CRL3000K 277V




Trigonometry and technology converge as dramatically angled arms, housing beautifully diffused LED modules, create the perfect balance of direct and indirect illumination. This assertive architectural approach decisively redefines the modern chandelier.

 700ARGN
 HARDWARE FINISH
 LAMP

 W MATTE WHITE 5 SATIN NICKEL
 -LED930 -LED930-277
 LED 90 CRI 3000K 120V -LED930-277






LAMPING

- (10) 3.5 watt up, and (10) 6 watt down, 3000K LED modules (98 total watts, 2950 total delivered lumens) / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

60 inches of variable rigid stems with coordinating finish



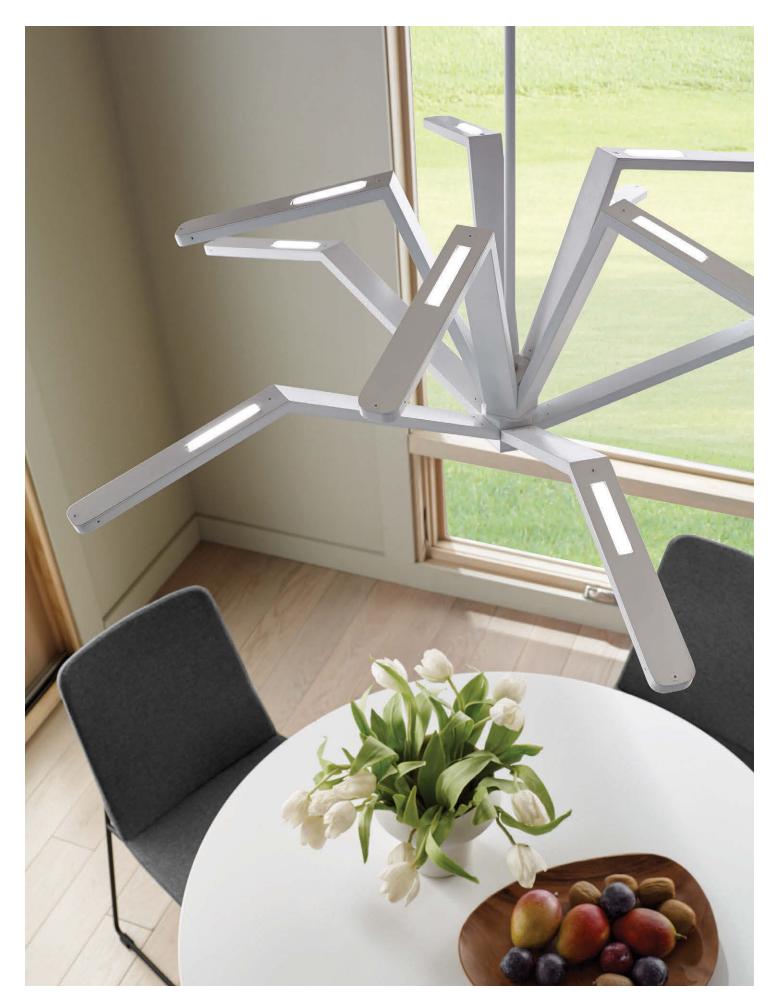




Sophisticated and undeniably beautiful, twenty-two precisely executed metal stems each bear a sleek crystal shade illuminated by a gently diffused LED. The stems form tiers which taper at varying angles and lengths to create a stunning, modern interpretation of the classic crystal chandelier.

700PTNA SHADE COLOR HARDWARE FINISH LAMP

C CLEAR CRYSTAL G SATIN GOLD S SATIN NICKEL
S SATIN NICKEL



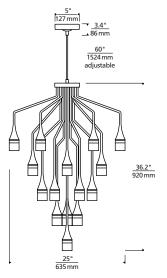

LAMPING

-ú- (22) 3 watt, 3000K LED modules (66 total watts, 2950 total delivered lumens) / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS


60" of variable rigid stems with coordinating finish







Seven free-floating arms are suspended by aerial cable, each tipped on both ends with frosted lamps and white flight paper.

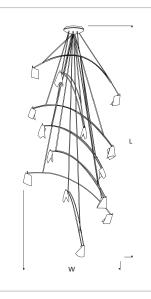

LAMPING

(14) 12 volt 20 watt, MR16 lamps / Dimmable with low-voltage electronic dimmer


SPECIFICATIONS

9" diameter round canopy houses a 300 watt electronic transformer with short circuit protection

700CRES	WIDTH (W)	LENGTH (L)	HARDWARE FINISH
	36 36"	- STANDARD 6'l on 36"w / 8' l on 48"w	C CHROME



Three free-floating arms are suspended by aerial cable, each tipped on both ends with frosted lamps and white flight paper.

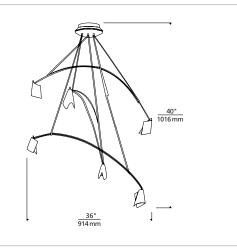

LAMPING

(6) 12 volt 20 watt, MR16 lamps / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS


6.5" diameter round canopy houses a 150 watt transformer with short circuit protection

700CRES36S HARDWARE FINISH

- C CHROME S SATIN NICKEL



Twenty-four gracefully arched rods, each tipped with a sparkling lamp, flow outward to form a contemporary interpretation of a chandelier.

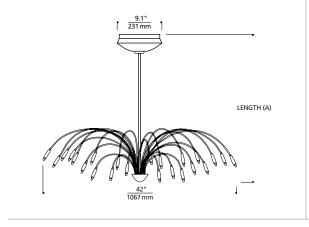

LAMPING

(24) 12 volt 10 watt, Xenon bi-pin lamps / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

9" diameter round canopy houses a 300 watt electronic transformer with short circuit protection


700STAC LENGTH (A) HARDWARE FINISH

20 20" 32 32" 44 44" C CHROME S SATIN NICKEL





Streams of Italian glass piping formed into a graceful glass bowl and highlighted with metal details, create an unmistakable sparkle in any space.

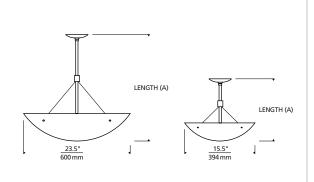

LAMPING

Small: (2) 120 volt 60 watt, clear A19 medium base lamps / Dimmable with standard incandescent dimmer

Large: (4) 120 volt 60 watt, clear A19 medium base lamps / Dimmable with standard incandescent dimmer

-<u>h</u>- Small: (2) 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamps $\scriptstyle /$ Dimmable with LED compatible or triac dimmer

Large: (4) 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamps $\, / \,$ Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

Integrated ball joint accommodates sloped ceilings up to 45°

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Ceiling / P. 388


700TRAS	SIZE	LENGTH (A)	SHADE COLOR	HARDWARE FINISH	LAMP	
COM	16 SMALL (15.5" DIAMETER) 23 LARGE (23.5" DIAMETER)	16 16" 24 24" (LARGE ONLY) 26 26" (SMALL ONLY) 36 36" (LARGE ONLY) 38 38" (SMALL ONLY)	C CRYSTAL	Z ANTIQUE BRONZE S SATIN NICKEL	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V





WHITE

A large rectangular tapered fabric shade suspended by rigid stems from a rectangular canopy is finished with an acrylic diffuser which provides a glare free wash of light.



LAMPING

(4) 120 volte 100 watt, A19 medium base lamps / Dimmable with standard incandescent dimmer

-i- (4) 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamps / Dimmable with LED comaptible or triac dimmer

SPECIFICATIONS

Must specify rigid stem length (A) at time of ordering

T24 LED includes Title 24 Compliant lamp

700TDMERC	LENGTH (A)	SHADE COLOR	HARDWARE FINISH	LAMP	
	36 36" 48 48"	C DESERT CLAY W WHITE	Z ANTIQUE BRONZEB BLACK	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V










3- & 5-PORT CANOPIES*

Use to suspend a combination of pendants from a single mounting location (pendants sold separately). Available in two styles: suspend three pendants or five pendants from a single round canopy. For use with incandescent pendants only

with incandescent pendants only.					
700TDCLP	STYLE	FINISH			
	3R 3 PENDANT ROUND 5R 5 PENDANT ROUND	Z ANTIQUE BRON: B BLACK			

* NOT COMPATIBLE WITH CLOTH CORDS NOTE: CONSULT FACTORY TO ORDER COMPACT FLUORESCENT VERSIONS

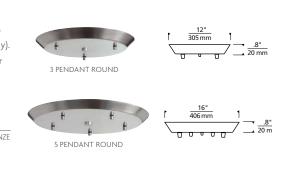



LINE-VOLTAGE PORT ALONE*

Minimal canopy. Can be installed in a range of locations. Includes integral junction box. Access to back of ceiling is not needed. For use with incandescent pendants and GU24 base compact fluorescent lamps only.

700TDFCP FINISH

Z ANTIQUE BRONZE SATIN NICKEL W WHITE

* NOT COMPATIBLE WITH CLOTH CORDS

LINE-VOLTAGE SWAG HOOK


Use as a creative tool to gracefully change a pendant's point of suspension from the mounting canopy to any point on the ceiling. Order one for each pendant.

700TDSWG FINISH

Z ANTIQUE BRONZEB BLACK

S SATIN NICKEL W WHITE





PENDANT TRACK ADAPTERS*

Allows 120 volt Pendants to be use on most popular single-circuit track lighting systems.

SATIN NICKEL W WHITE

INCANDESCENT / GU24 COMPACT FLUORESCENT PENDANTS

For use with 120 volt incandescent and GU24 base compact fluorescent pendants that hang from a single cord. Order the 700TD pendant + one Track Adapter for each pendant.

700TD	TYPE**	FINISH
	HASP FITS HALO	B BLACK
	JUSP FITS JUNO	W WHITE
	LISP FITS LIGHTOLIER	



4-PIN COMPACT FLUORESCENT PENDANTS

For use with 120 volt 4-pin compact fluorescent pendants that hang from a single cord. In the item number, substitute 700TD with one of the following:

TYPE**	
700TH	FITS HALO
700TJ	FITS JUNO
700TI	FITS LIGHTOLIER



COMPACT FLUORESCENT PIN-BASED PENDANT

CANOPY GOOF RING

Helps to cover gaps created by miscut holes in ceiling drywall. 5.5" in diameter. Works with all low-voltage and line-voltage Tech Lighting canopies that are less than 5.5" in diameter.

700CNPGR FINISH

S SATIN NICKEL



And substitute the finish with one of the following:

FINISH (TRACK ADAPTER / PENDANT)

BLACK / ANTIQUE BRONZE BLACK / SATIN NICKEL WHITE / ANTIQUE BRONZE WHITE / SATIN NICKEL

For example, instead of 700TDECPLUS-CF, the item number for a white HALO-compatible Track Adapter with the Echo pendant 700THECPLUWS-CF

^{*} NOT COMPATIBLE WITH CLOTH CORDS
** TECH LIGHTING IS NOT AFFILIATED WITH, NOR IS IT ENDORSED BY ANY OF THE COMPANIES LISTED NOR DOES TECH LIGHTING DISTRIBUTE ANY OF THEIR PRODUCTS

3-PORT LINEAR CANOPY

-Mounts to a standard 4" junction box with round plaster ring (provided by electrician). Electronic transformers inside a 28" by 4" housing. Three FreeJack ports; for ceiling only.

700FJL3	00FJL3 FINISH		VOLTAGE		
	Z ANTIQUE BRONZE B BLACK C CHROME S SATIN NICKEI	277 -LED	120V IN / 12V OUT 277V IN / 12V OUT 120V IN / 12V OUT LED 277V IN / 12V OUT LED		
	M WHITE	-LEDZ//	2//V IN/ 12V OUT LEL		

TIP: 120V FreeJack canopies are dimmable with a standard incandescent dimmer. 120V LED FreeJack canopies are dimmable with a low-voltage electronic dimmer. 277V FreeJack canopies are dimmable with 277V incandescent dimmer. 277V LED canopies are dimmable with 277V low-voltage electronic dimmer.



4-PORT SQUARE CANOPY



-Mounts to a standard 4" junction box with round plaster ring (provided by electrician). Electronic transformers inside an 11" by 11" housing. Four FreeJack ports; for ceiling only.

700FJS4	FI	NISH	VOLTAGE	
	B C S	ANTIQUE BRONZE BLACK CHROME SATIN NICKEL WHITE	277 -LED -LED277	120V IN / 12V OUT 277V IN / 12V OUT 120V IN / 12V OUT LED 277V IN / 12V OUT LED



3 & 5-PORT ROUND CANOPIES



Mounts to a standard 4" junction box with round plaster ring (provided by electrician). Available in two styles. 3-port canopy has electronic transformers inside 12" diameter housing. 5-port canopy has electronic transformers inside 16" diameter housing. Three or five FreeJack ports: for ceiling only.

700FJR	STYLE	FINISH	VOLTAGE
	3 3-PORT 5 5-PORT	Z ANTIQUE BRONZE B BLACK C CHROME S SATIN NICKEL W WHITE	120V IN / 12V OUT 277 277V IN / 12V OUT -LED 120V IN / 12V OUT LED -LED277 277V IN / 12V OUT LED



3-PORT

5-PORT

4-PORT ROUND CANOPY



Mounts to a standard 4" junction box with round plaster ring (provided by electrician). Electronic transformers in a 12" diameter housing. Four FreeJack ports. For ceiling only.

700FJR4	FINISH	VOLTAGE		
	Z ANTIQUE BRONZE S SATIN NICKEL	277 -LED -LED277	120V IN / 12V OUT 277V IN / 12V OUT 120V IN / 12V OUT LED 277V IN / 12V OUT LED	

4-PORT ANTIQUE BRONZE





LOW-VOLTAGE SWAG HOOK

Use with FreeJack Pendants.

700FJSWG	FINISH		
		ANTIQUE BRONZE CHROME	


S SATIN NICKEL





7-PORT RECTANGULAR CANOPY

(SHOWN IN FREEJACK / WALNUT WOOD)

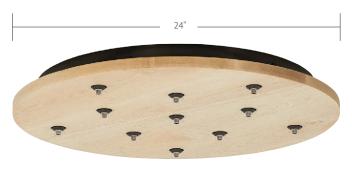

11-PORT ROUND CANOPY (SHOWN IN FREEJACK / MAPLE WOOD)



MULTI-PORT CANOPIES*

-id- Mounts to a standard 4" junction box with round plaster ring (provided by electrician). Drywall anchors included for additional support. All low-voltage ports include electronic transformers. 7-Port FJPJ (FreeJack PowerJack) combo includes 4 low-voltage FreeJack ports and 3 line-voltage PowerJack ports. 11-Port combo includes 5 low-voltage FreeJack ports and 6 line-voltage PowerJack ports.

700	SYSTEM	SHAPE	CANOPY	FINISH	TYPE
	FJPJ COMBO FREEJACK AND POWERJACK	LD3 3-PORT LINEAR**	M MAPLE WOOD	Z ANTIQUE BRONZE	STANDARD
	FJ LOW-VOLTAGE FREEJACK	LD7 7-PORT RECTANGULAR	W WALNUT WOOD	S SATIN NICKEL	-LED LED***
	PJ LINE-VOLTAGE POWERIACK	RD11 11-PORT ROUND	T METAL		

^{*} NOT COMPATIBLE WITH CLOTH CORDS

IMPORTANT NOTES:

To order compatible FreeJack pendants, refer to the Pendant Section of this catalog. All Low-Voltage pendants are compatible

To order compatible PowerJack pendants, refer to the Pendant Section of this catalog. Substitute 700PJ instead of 700TD in the item number to indicate the PJ version of the pendant which is compatible with these multi-port canopies. For example, instead of ordering 700TDKIELPBKS, order 700PJKIELPBKS. Please note, some Pendants are not compatible due to size and weight limitations. Consult techlighting.com for compatible pendants.

NOTE: Pin-based fluorescent lamps will require a specific lamp + ballast combination. Please contact our custom quotes department at quotes@generation-brands.com to order canopies with pin-based compact fluorescent lamps.

^{**} NOT AVAILABLE IN FJPJ

*** LED IS ONLY AVAILABLE FOR THE FJ PORTS







DESIGN YOUR FREEJACK SYSTEM

The first step in designing your FreeJack system is to determine what it is you are trying to light. You'll need to decide where the fixtures should be installed to put light where you want it. See compatible fixtures on P. 32-255, 534-586. Refer to the indicated pages for detailed specifications. Choose your fixtures then add accessories if desired. We offer a broad range of colorful and decorative accessories and functional optical controls (P. 588-593).

CHOOSE YOUR CANOPY

Use the information on P. 312-313 to help you choose the right FreeJack Canopy. Select one Single-Port Canopy for every fixture or a Multi-Port Canopy that contains the same number of ports as the number of fixtures you have chosen. The Single- and Multi-Port Canopies include a transformer or transformers. The Single Ports on P. 313 are used to power a series of Fixtures from a remote transformer which is sold separately. Select from one of the FreeJack Adapters (P. 313) to hang FreeJack Fixtures on standard track lighting, T-TRAK systems or existing recessed cans. If you are using LED heads or pendants, be sure to choose a canopy that is compatible with LED fixtures.



ADJUSTING CABLE TO DESIRED LENGTH

Adjusting FreeJack cable is easy. Loosen, but do not remove, the set screw on the tip of the FreeJack connector and the oval head set screw on the conical connector. Pull out the coaxial cable and cut it to the desired length. Gently twist the end of the cable between your thumb and forefinger, then feed it through the conical connector. The outer wire will come to a stop point about 3/4 of an inch into the connector. Keep pushing the cable into the connector while rotating the connector, which makes feeding the inner wire into the connector tip easier. Look into the sight hole on the top of the connector to ensure that the inner wire makes contact with the end of the connector. Hold the cable in place and tighten the set screw on the tip of the connector. Make sure the connection is tight! Tighten the set screw on the conical connector firmly. Finally, pull the coaxial cable toward the fixture to smooth out the wrinkles in the outer wire.





SPECIAL INSTALLATIONS

4" ROUND FLUSH CANOPY

Mounts to a standard 4" junction box with round plaster ring (provided by electrician).

Electronic transformer (included) fits in junction box. One FreeJack port; for ceiling or wall.

700FJ4RF	FII	NISH	VOLTAG	E
	Z B C S	AGED BRASS ANTIQUE BRONZE BLACK CHROME SATIN NICKEL	024 277 -LED -LED277	120V IN / 12V OUT 120V IN / 24V OUT 277V IN / 12V OUT 120V IN / 12V OUT LED 277V IN / 12V OUT LED
	B C S	BLACK CHROME	277 -LED	277V IN / 12V OUT 120V IN / 12V OUT I



AGED BRASS



4" SOUARE FLUSH CANOPY

Mounts to a standard 4" junction box with round plaster ring (provided by electrician).

Electronic transformer (included) fits in junction box. One FreeJack port; for ceiling or wall.

700FJ4SQ	FINISH	VOLTAGI	
	Z ANTIQUE BRONZE		120V IN / 12V OUT
	B BLACK	024	120V IN / 24V OUT
	C CHROME	277	277V IN / 12V OUT
	S SATIN NICKEL	-LED	120V IN / 12V OUT LED
	W WHITE	-I ED277	277\/ INI / 12\/ OLIT LED



SURFACE CANOPY

-n- Mounts to a standard 4" junction box with round plaster ring (provided by electrician). Vaulted version available for ceilings up to 45°. Electronic transformer inside 2" high, 4.5" diameter housing. One FreeJack port; for ceiling or wall.

700FJSF	CEILING	FINISH	VOLTAGE	
	4 FLAT 4V VAULTED	Z ANTIQUE BRONZE B BLACK C CHROME S SATIN NICKEL W WHITE	024 277 -LED -LED277	120V IN / 12V OUT 120V IN / 24V OUT 277V IN / 12V OUT 120V IN / 12V OUT LED 277V IN / 12V OUT LED





2" SQUARE FLUSH CANOPY

- Mounts to a special 2" square, 6" deep junction box (included). Electronic transformer (included) fits in junction box. One FreeJack port; for ceiling only.

700FJ2SQ67	FI	NISH	VOLTAG	E
	Z	ANTIQUE BRONZE		120V IN / 12V OUT
	В	BLACK	024	120V IN / 24V OUT
	C	CHROME	277	277V IN / 12V OUT
	S	SATIN NICKEL	-LED	120V IN / 12V OUT LED
	W	WHITE	-I FD277	277V IN / 12V OUT LED



SINGLE-PORTS

Use to power a series of Heads or Pendants from a remote transformer (sold separately, see P. 540).

PORT WITH CANOPY

4" round and 4" square canopies mount to a standard 4" junction box with round plaster ring (provided by electrician). 2" square canopy mounts to our special 2" square, 3.5" deep junction box (included)

2" square, 3.5" deep junction box (included).				
700FJFCP	CANOPY	FII	NISH	
		B C S	ANTIQUE BRONZE BLACK CHROME SATIN NICKEL WHITE	



4" ROUND



4" SQUARE



PORT ALONE

Minimal 1-1/2" diameter, 2-1/2" deep. Can be installed in a range of locations. Access to back of ceiling is not needed.

700FJFCP	FINISH		
	Z ANTIQUE BRONZI C CHROME S SATIN NICKEL W WHITE		



TIP: 120V FreeJack canopies are dimmable with a standard incandescent dimmer. 120V LED FreeJack canopies are dimmable with a low-voltage electronic dimmer. 277V FreeJack canopies are dimmable with 277V incandescent dimmer. 277V LED canopies are dimmable with 277V low-voltage electronic dimmer.

ADAPTERS

Use to power a series of Heads or Pendants from a remote transformer (sold separately, see P. 540).

TRACK ADAPTER

Allows FreeJack Heads or Pendants to be used on most popular 120 volt track lighting systems. Transformer concealed in black or white housing.

AHB.	-
	THE STATE OF THE S
	-
FITS JUNO/HALO*	FITS LIGHTOLI

700FJ	TYPE	FINISH	VOLTAGE
	HASP FITS JUNO / HALO*	B BLACK	12V 75W ELECTRONIC TRANSFORMER

T-TRAK FREEJACK CONNECTOR



-i- Use to adapt any low-voltage FreeJack head or pendant to T-TRAK system. Order one T-TRAK FreeJack Connector for each FreeJack head or pendant. Specify Single-Circuit T-TRAK or Two-Circuit T-TRAK. Includes transformer. 75 watt version dimmable with a standard incandescent dimmer. 60 watt version dimmable with low-voltage electronic dimmer.

700 SYSTEM CHEDFJ	FINISH	VOLTAGE
TT T-TRAK	Z ANTIQUE BRONZE S SATIN NICKEL W WHITE	12V 75W ELECTRONIC TRANSFORMER -LED 12V 60W ELECTRONIC TRANSFORMER





RECESSED CAN ADAPTER



Allows FreeJack Heads or Pendants to be used on most popular 120 volt track lighting systems. Transformer concealed in black or white housing.

700FJRCAD	FINISH	VOLTAGE	
	Z ANTIQUE BRONZE C CHROME S SATIN NICKEL W WHITE	12V 75W ELECTRONIC TRANSFORMER -LED 12V 60W ELECTRONIC TRANSFORMER	



ETL CLASSIFIED FOR USE WITH THE ETL CLASSIFIED FOR USE WITH THE FOLLOWING RECESSED CANS: JUNO IC2, JUNO IC22, TC2, AND TC2R: HALO HTT AND H7RT; COOPER ILGHTING H27RT; CAPRI (THOMAS) LIGHTING PR75ASIC - 7 TPR75ASIC-8 DY643); PROGRESS LIGHTING PR75ASIC - 8 PIO8-TG, AND P-8TG & PIO8-TG.

* TECH LIGHTING IS NOT AFFILIATED THE LIGHT INFO IS NOT A REFLICATED WITH, NOR IS IT ENDORSED BY ANY OF THE COMPANIES LISTED ABOVE. TECH LIGHTING DOES NOT DISTRIBUTE OR SELL ANY OF THE PRODUCTS LISTED ABOVE. CALL FOR MORE INFORMATION.

SYSTEM CONNECTORS

Use to adapt any FreeJack fixture to any Tech Lighting system.

MONORAIL FREEJACK CONNECTOR

700MOCHED FINISH Z ANTIQUE BRONZE S SATIN NICKEL

WALL MONORAIL FREEIACK CONNECTOR

700WMOCHED	FINISH	
	Z ANTIQUE BRONZE C CHROME S SATIN NICKEL	

TWO-CIRCUIT MONORAIL FREEIACK CONNECTOR

700MO2CHED FINISH



C CHROME S SATIN NICKEL






BSI Waukesha, WI PHOTOGRAPHER Tricia Shay LIGHTING DESIGNER Tracie Losch, LC



This is a truly minimalist profile with undeniable design flexibility and state-of-the-art LED light guide performance to match. The commercial grade light guide technology creates uniform light output and color across the down light surface while completely eliminating pixilation.

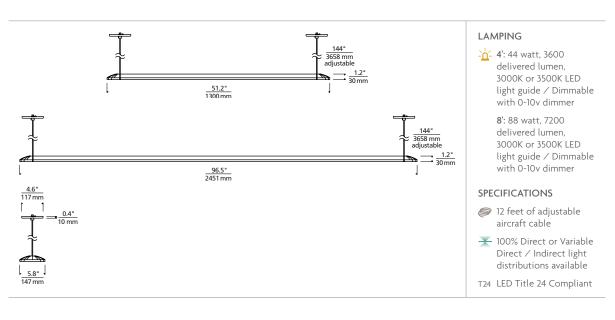


 700LSGATS
 CRI / COLOR TEMPERATURE
 LENGTH
 FINISH
 OUTPUT
 CONTROLS
 DISTRIBUTION
 MOUNTING

 930
 90 CRI 3500K
 04 4FT 90 CRI 3500K
 W
 A2 900 LMS/FT
 0 0-10V
 0 0-10V CONTROL OF DIRECT/INDIRECT 1 (100% DIRECT 1 (100% DIRECT)
 SA12 ADJUSTABLE CABLE






An angular, metal shade housing a powerful LED source is offered in satin nickel, white or treated with a special coating to replicate the warm look and texture of real woods including oak, ash or chestnut, then finished with satin nickel endcaps for a highly sophisticated touch.

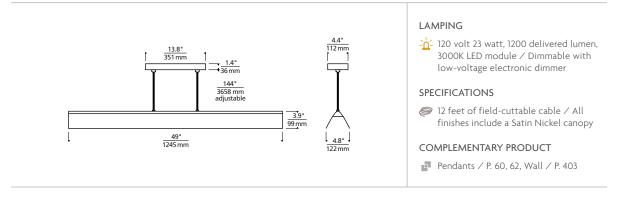

 700LSDBS
 SHADE FINISH
 LAMP


 N
 BROWN CHESTNUT S SATIN NICKEL Y WEATHERED GRAY OAK W WHITE A WHITE ASH
 -LED930 -LED930-277
 LED 90 CRI 3000K 277V



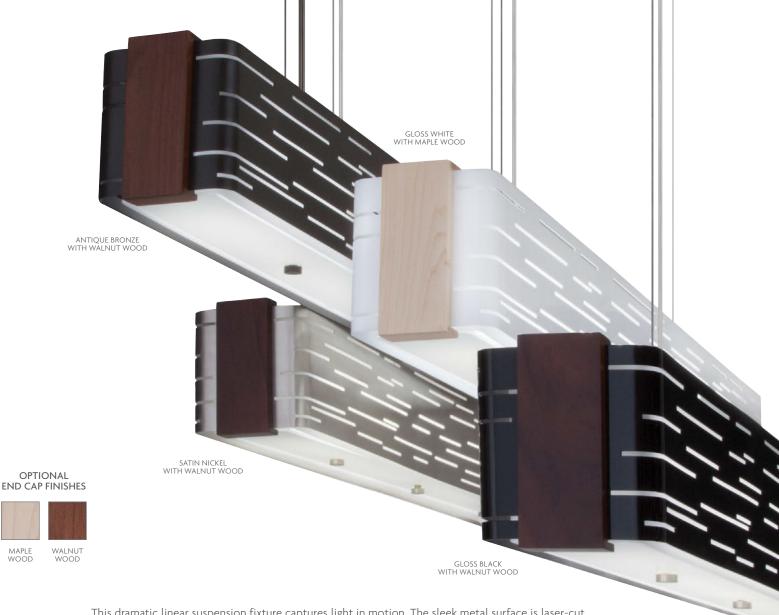

This dramatic linear suspension fixture captures light in motion. The sleek metal surface is laser-cut with horizontal slots which allow light to shine through the inner white diffuser. Optional wood end caps complement the design with a touch of warmth in an unexpected way.

A bottom glass diffuser provides a glare free wash of light.

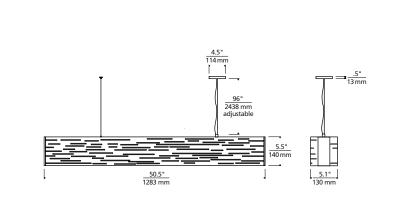

LAMPING

(2) 54 watt high output T5 linear fluorescent lamps

40 watt, 2000 delivered lumen, 2700K, E12 base LED vintage tubular lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

Has a maximum drop length of 8 feet. Ships with extra center power feed canopy and side post for applications with a centered junction box.

T24 LED Title 24 Compliant

COMPLEMENTARY PRODUCT


Pendant / P. 180, Wall / P. 486, 487

700LSRVL	SH	HADE FINISH	TF	RIM COLOR	LAMP	
	B W	ANTIQUE BRONZE GLOSS BLACK GLOSS WHITE SATIN NICKEL	W	MAPLE WOOD WALNUT WOOD METAL	-CF -CF277 -LED922	FLUORESCENT 120V FLUORESCENT 277V E12 LED 90 CRI 2200K 120V





Inspired by the sheen of big city streets and intersections illuminated at night. Composed of sheets of raw steel protected with a clear lacquer coat and accented by brass spot welding at the joints, this suspension fixture has a purposefully imperfect, rugged, industrial design.

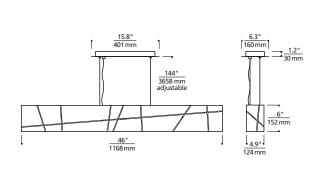

LAMPING

- (4) 120 volt 40 watt, G9 halogen bi-pin lamps or (4) 120 volt 60 watt, G9 halogen bi-pin lamps / Dimmable with standard incandescent dimmer
- -i- (2) 20 watt, 2,000 total delivered lumen, 3000K LED modules / Dimmable with a low-voltage electronic dimmer

SPECIFICATIONS

12 feet of field-cuttable cord / Includes Black canopy


COMPLEMENTARY PRODUCT

Pendant / P. 182, Wall / P. 435

700LSCRS	SH	HADE FINISH	LAMP	
	S	STEEL		HALOGEN 120V
			-LED	LED 3000K 120V
			-I ED277	LED 3000K 277V



Parallel planes of cold rolled steel coated in matte rubberized paint reveal decorative satin nickel endcaps which house a recessed LED source designed to distribute a significant punch of task lighting on surfaces below without glare.

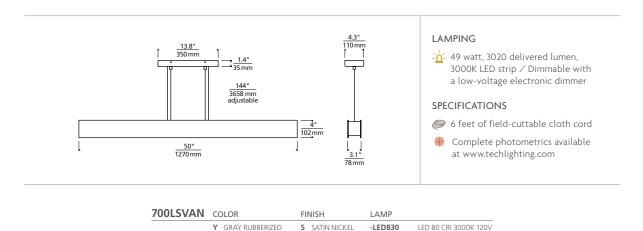

MECHANICAL CONNECTOR

-LED830-277 LED 80 CRI 3000K 277V


Joins multiple Vandor Linear Suspension fixtures to form a continuous row. Each fixture requires its own junction box.



W WHITE RUBBERIZED



Jagged lines, asymmetrical shape and exposed Edison-style lamping combine to create a visually stimulating linear fixture inspired by the beauty of leafless winter tree branches.

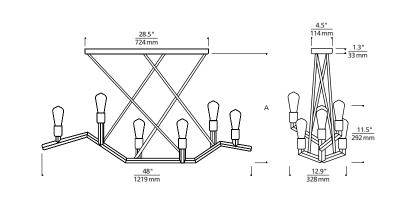

LAMPING

(6) 120 volt 60 watt, S21 Squirrel Cage lamps / Dimmable with standard incandescent dimmer

-i- (6) 120 volt 3.5 watt, 300 delivered lumen, (1800 total delivered lumens), 2200K or 2700K, medium base LED vintage Squirrel Cage lamps


SPECIFICATIONS

Must specify stem length (LENGTH A) at time of ordering

T24 LED includes Title 24 Compliant lamp

700LSAKMB	LENGTH (A)	HARDWARE FINISH	LAMP	
	36 36" STEM LENGTH 48 48" STEM LENGTH	Z ANTIQUE BRONZEB BLACK	-LED922	INCANDESCENT 120V ST19 LED 90 CRI 2200K 120V
			-LED927	ST19 LED 90 CRI 2700K 120V



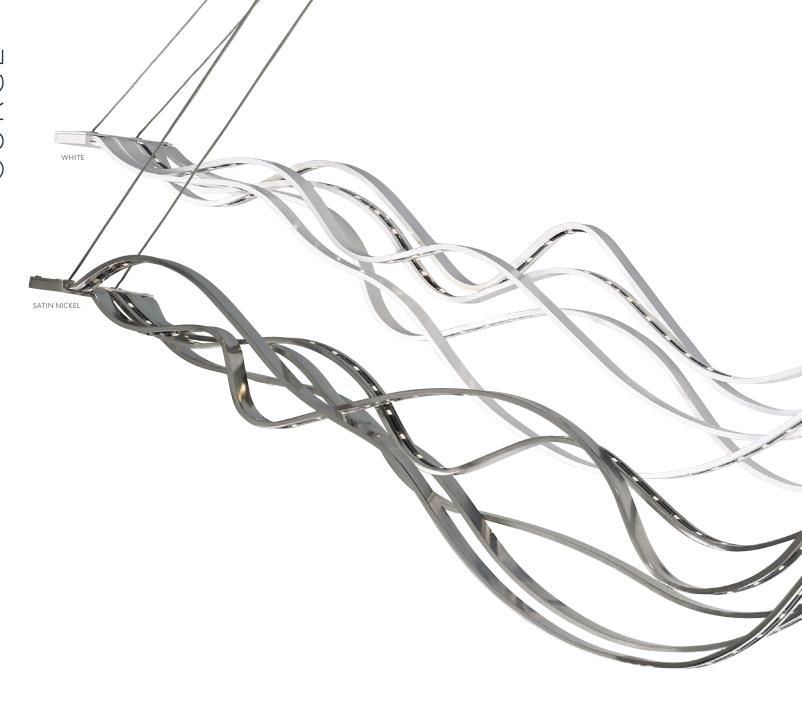

The graceful force of ocean waves is captured when gently undulating bands of downward and upward firing LED strips join to form a striking fixture capable of creating layers of illumination. Fixtures can be linked together end-to-end to create longer, continuous runs using optional Mechanical Connector.

700LSSURG	HARDWARE FINISH	LAMP	
	S SATIN NICKEL	-LED	LED 80 CRI 3000K 120V
	W WHITE	-LED277	LED 80 CRI 3000K 277V

LINEAR CONNECTOR

Joins multiple Surge Linear Suspension fixtures to form a continuous row. Each fixture requires its own junction box.

700SURG FINISH S SATIN NICKEL W WHITE


L-CONNECTOR


Joins multiple Surge Linear Suspension fixtures to form a 90 degree angle. Each fixture requires its own junction box.



700SURGL FINISH

S SATIN NICKEL W WHITE

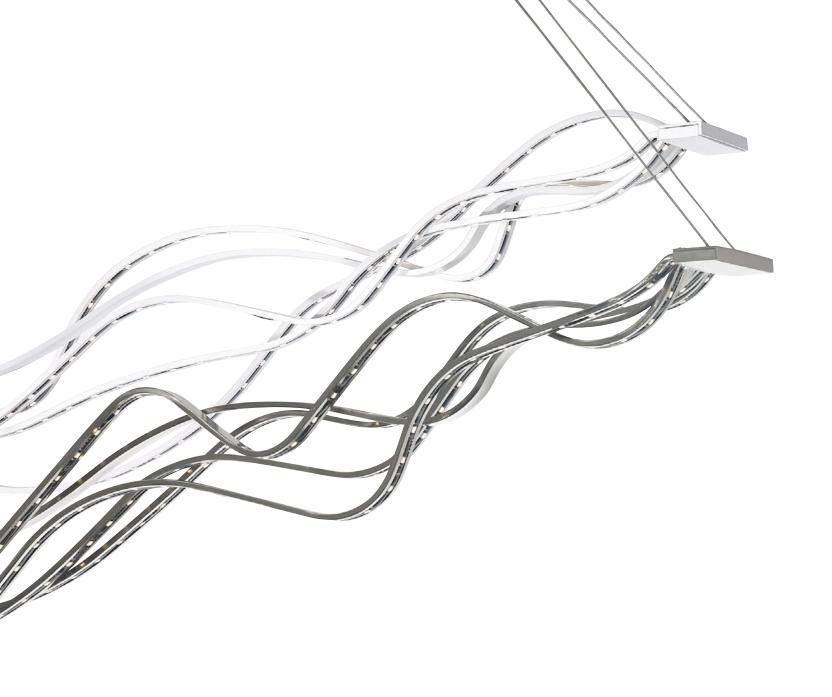

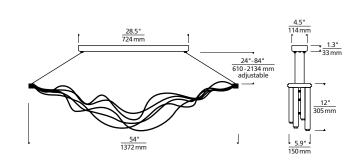

LAMPING


57 watts, 2750 delivered lumens of downlight and 12 watts, 800 delivered lumens of uplight, 3000K, LED strips / Dimmable with a low-voltage electronic dimmer


SPECIFICATIONS


12 feet of field-cuttable cable

Complete photometrics available at www.techlighting.com




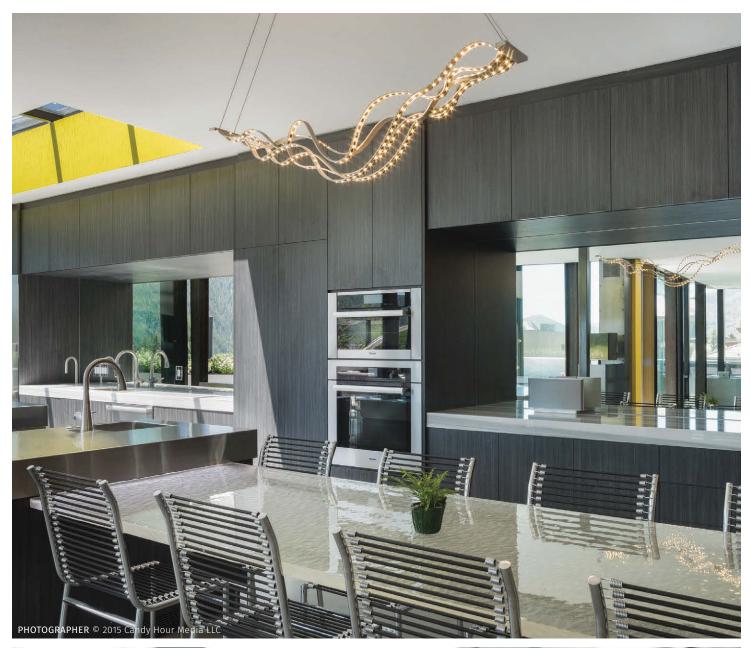

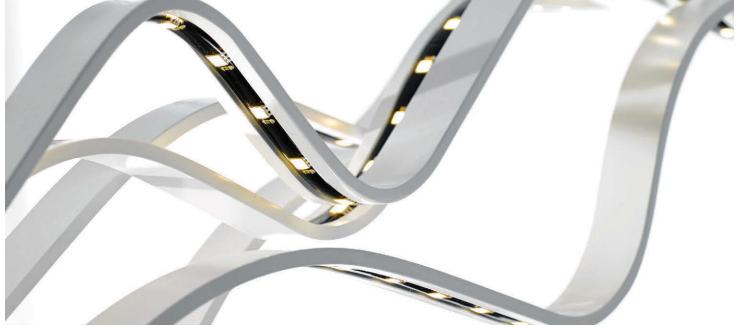

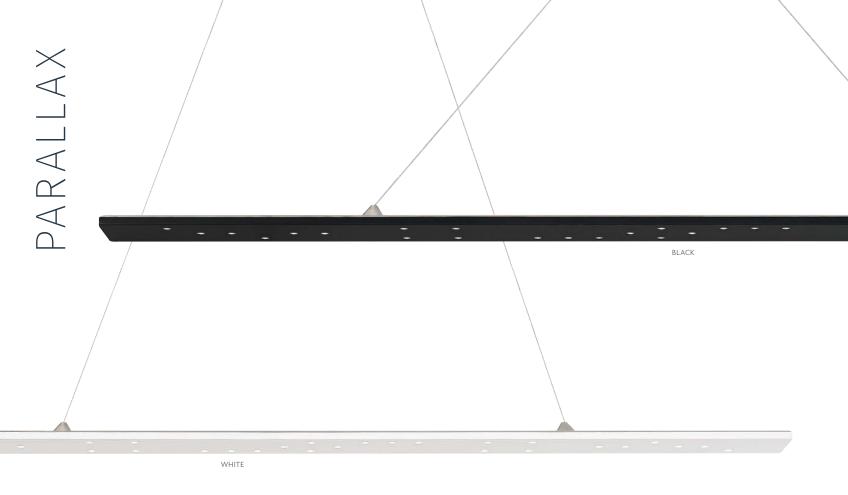

Equal parts minimalist and futuristic, the ultra-thin aluminum and acrylic body houses thirty high-powered LEDs which contribute to its simplistic beauty yet also make it incredibly functional in both residential and commercial applications.

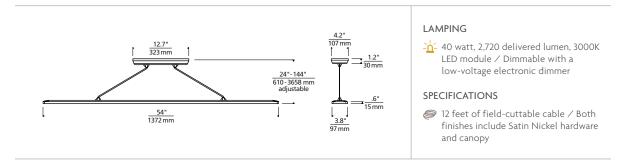

 700LSPRLX
 ACRYLIC FINISH
 LAMP

 B BLACK W WHITE
 -LED --LED 277
 LED 80 CRI 3000K 120V LED 80 CRI 3000K 277V










Strong lines. Industrial simplicity. This LED suspension fixture performs as it must with such a simple yet handsome design and lets the light itself take center stage. Equally at home over a kitchen island or dining room table as it is in a professional setting over a conference table, lighting a desk space or welcoming guests.

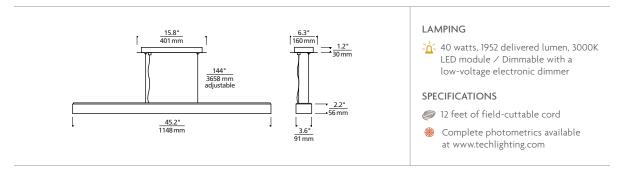

700LSKNOX	HARDWARE FINISH			LAMP					
	M	BLACK RUBBERIZED GUNMETAL SATIN NICKEL		-LED -LED277	LED 80 CRI 3000K 120V LED 80 CRI 3000K 277V				

MECHANICAL CONNECTOR

Joins multiple Knox Linear Suspension fixtures to form a continuous row. Each fixture requires its own junction box.








38" / SATIN NICKEL

Hard and soft lines converge in this elegantly simple silhouette equally suitable for both residential and commercial settings. A bottom acrylic diffuser provides a glare free wash of light. A highly reflective inner white housing and two high output fluorescent lamps ensure this fixture performs as well as it looks.

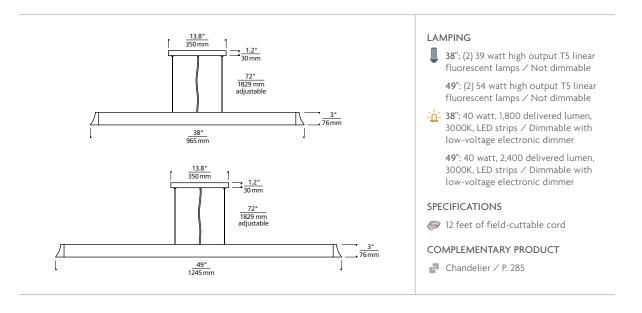


700LSZHN	LENGTH	SHADE FINISH	LAMP				
	38 38"	Z ANTIQUE BRONZE	-CF	FLUORESCENT 120V			
	49 49"	B BLACK (RUBBERIZED)	-CF277	FLUORESCENT 277V			
		G SATIN GOLD	-LED	LED 80 CRI 3000K 120V			
		S SATIN NICKEL	-I FD77	LED 80 CRI 3000K 277V			





Geometries converge to make the seemingly complex simply beautiful. The bottom diffuser is composed of clear injection molded plastic inserts which add remarkable depth and illusion when viewed from below.

Additional molded plastic inserts in either silver or black sit atop the fixture reinforcing its thoughtful shape. Horizontal and vertical lines intersect throughout adding additional visual interest.

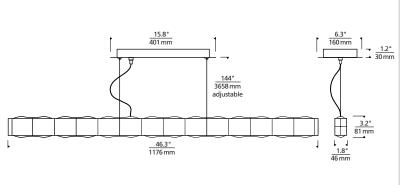

LAMPING

Cirect: 45 watt, 2,400 delivered lumen, 3000K LED strips ∕ Dimmable with low voltage electronic dimmer

Indirect: 50 watt, 3500 delivered lumen (50% up, 50% down), 3000K LED strips / Dimmable with lowvoltage electronic dimmer

SPECIFICATIONS

12 feet of field-cuttable cord

Complete photometrics available at www.techlighting.com

700LSBIZ	DI	STRIBUTION	SH	HADE FINISH	LAMP					
	Α	DIRECT	В	BLACK	-LED830	LED 80	CRI	3000	K 12	0/
	В	50% DIRECT / 50% INDIRECT	S	SATIN NICKEL	-LED830-277	LFD 80	CRI	3000	K 27	7١



TOP DETAIL

MECHANICAL CONNECTOR


Joins multiple Biza Linear Suspension fixtures to form a continuous row. Each fixture requires its own junction box.



700BIZA FINISH



The ultimate combination of simplicity and light output. A special co-extruded remote phosphor LED channel, less than 1" deep, provides a flawlessly even wash of light perfect for task-oriented spaces like conference rooms, reception areas and kitchen islands.

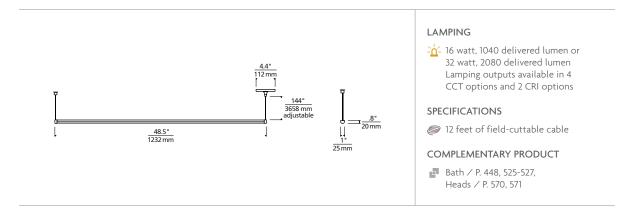

700	SYST	EM	RAER OUTPUT		LENGTH	HARDWARE FINISH	LAMP		VOLTAGE*		
	LS	LINEAR SUSPENSION (INCLUDES	CANOPY)	3 300 LMS / FT	48 48"	C CHROME	-LED824	LED 80 CRI 2400K		120 VOLT	
	MO	MONORAIL* (12V ONLY)		6 600 LMS / FT		S SATIN NICKEL	-LED835	LED 80 CRI 3500K	-277	277 VOLT	
	MO2	TWO-CIRCUIT MONORAIL*					-LED840	LED 80 CRI 4000K			
							-LED930	LED 90 CRI 3000K			


*IF SUSPENDING ON MONORAIL, IT DOES NOT REQUIRE A VOLTAGE DESIGNATION.





SMOKE / SATIN NICKEL

An elegant combination of simple design and superior light output. A sleek plate of glass floats in front of a special co-extruded remote phosphor LED channel, providing a flawless even wash of light perfect for task-oriented spaces like conference rooms, reception areas and kitchen islands.

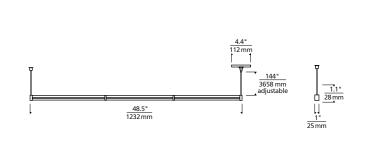

LAMPING

16 watts, 1040 delivered lumen or 32 watt, 2080 delivered lumen Lamping outputs available in 4 CCT options and 2 CRI options

SPECIFICATIONS

12 feet of field-cuttable cable

COMPLEMENTARY PRODUCT


Bath / P. 450, 525-527, Heads / P. 570, 571

700	SYST	EM GIAR	C	UTPUT	LENGTH	SHA	ADE COLOR	Н	ARDWARE FINISH	LAM	Р		VOL	TAGE*
	LS	LINEAR SUSPENSION	3	300 LMS / FT	48 48"	C	CLEAR	С	CHROME	-LED	324	LED 80 CRI 2400K		120 VOLT
		(INCLUDES CANOPY)	6	600 LMS / FT		K :	SMOKE	S	SATIN NICKEL	-LED	335	LED 80 CRI 3500K	-277	277 VOLT
	MO	MONORAIL* (12V ONLY)								-LED	340	LED 80 CRI 4000K		
	MO2	TWO-CIRCUIT MONORAIL*								-LED	930	LED 90 CRI 3000K		

^{*}IF SUSPENDING ON MONORAIL, IT DOES NOT REQUIRE A VOLTAGE DESIGNATION.






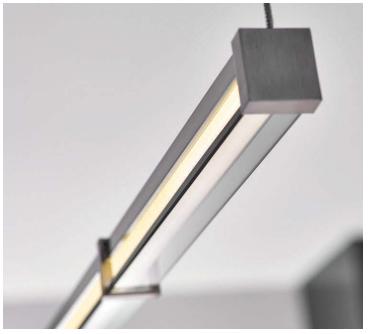



Sharp angles create a daring, structured light sculpture sure to make a modern statement in any space.

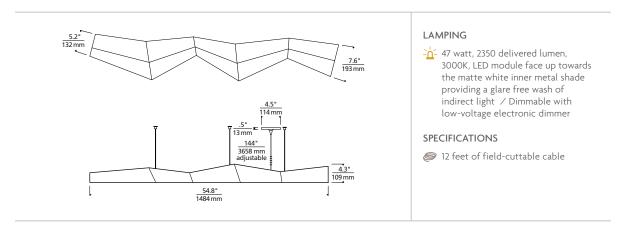






BOTTOM DETAIL



Soft lines of the figure 8-shaped acrylic diffuser and die-cast metal end-caps contribute to an unexpected and playful modern interpretation of a suspension fixture. The bold lines of the heat sink extrusion speak to the design's functionality. Equally suitable for residential and commercial applications.

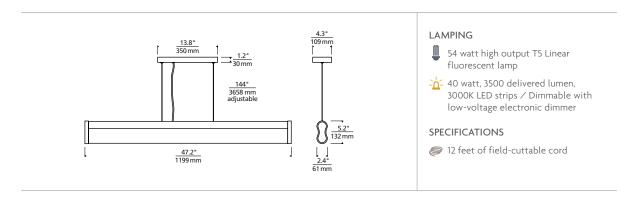

700LSUNS	COLOR	FINISH	LAMP	
	F FROST	S SATIN NICKEL	-CF277 -LED	FLUORESCENT 120V FLUORESCENT 277V LED 80 CRI 3000K 120V LED 80 CRI 3000K 277V

MECHANICAL CONNECTOR

Joins multiple Unison Linear Suspension fixtures to form a continuous row. Each fixture requires its own junction box.




700UNS FINISH
S SATIN NICKEL








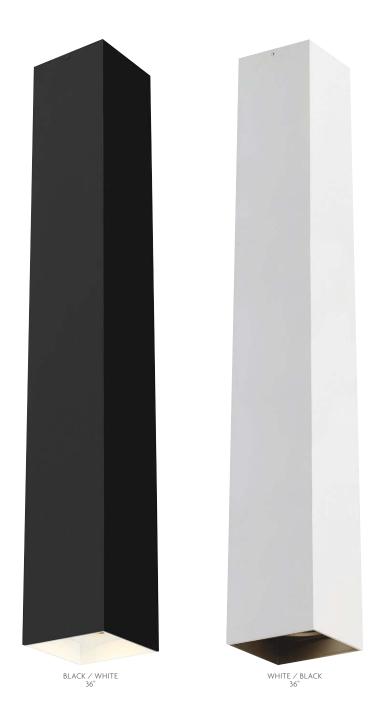

Specification-grade surface-mounted multifunction downlights within the minimalist styling of a simple, modern cube. High performance output is harnessed by field changeable optics and precisely controlled by $0^{\circ}-30^{\circ}$ tool-free tilt, while choice of recessed trims adds a custom touch.

700FMEXO	SHA	DE HEIGHT	BEAM SPREAD		SHADE COLOR		TRIM FINISH		LAMP	
	6 6	5.1"	20	20°	В	MATTE BLACK	В	BLACK	-LED927	LED 90 CRI 2700K 120V-277 UNV
	18 1	8"	30	30°	W	MATTE WHITE	G	GOLD HAZE	-LED930	LED 90 CRI 3000K 120V-277 UNV
	36 3	6"	40	40°			W	WHITE	-LED935	LED 90 CRI 3500K 120V-277 UNV
			60	60°						



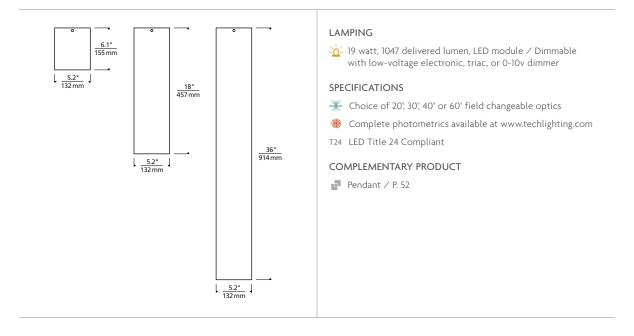







BLACK / BLACK

BLACK / GOLD HAZE

BLACK / WHITE








WHITE / BLACK

WHITE / GOLD HAZE

WHITE / WHITE

Specification-grade surface-mounted multifunction downlight 1x2 multiples with minimalist cuboid styling. High performance output is harnessed by field changeable optics and precisely controlled by independant $0^{\circ}-30^{\circ}$ tool-free tilt, while choice of recessed trim colors adds a custom touch.



LAMPING

-i- (2) 14 watt, 817 delivered lumen (1635 total delivered lumen), LED modules / Dimmable with low-voltage electronic, triac or 0-10v dimmer

SPECIFICATIONS

★ Choice of 20°, 30°, 40° or 60° field changeable optics

Complete photometrics available at www.techlighting.com

T24 LED Title 24 Compliant

COMPLEMENTARY PRODUCT

Pendant / P. 52


700FMEXOD SHADE F	HEIGHT BEAM SPREAD	SHADE COLOR	TRIM FINISH	LAMP		
6 6.1"	20 20° 30 30° 40 40° 60 60°	B MATTE BLACK W MATTE WHITE	B BLACK G GOLD HAZE W WHITE	-LED930	LED 90 CRI 2700K 120V-277V UNV LED 90 CRI 3000K 120V-277V UNV LED 90 CRI 3500K 120V-277V UNV	





MATTE WHITE

Clean, sharp lines harmonize with the cylindrical profile and soft matte or raw aluminum finishes of this sizable stamped metal shade. Choice of low and high output LED modules offers flexibility for use in both modern residential or commercial applications.



LAMPING

-ii- Low output: 18 watt, 1392 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

High output: 39 watt, 1807 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic, triac, or 0-10v dimmer

SPECIFICATIONS

Choice of 25° or 40° field changeable optics

Complete photometrics available at www.techlighting.com

T24 LED includes Title 24 Compliant lamp


COMPLEMENTARY PRODUCT

Pendant / P. 38

700FMHTC	BEAM SPREAD		SHADE FINISH		LAMP			
		25° 40°	В	BRUSHED ALUMINUM MATTE BLACK MATTE WHITE	-LEDLO927 -LEDHI927 -LEDLO930 -LEDHI930 -LEDLO927-277 -LEDLO930-277	LED LO-OUTPUT 90 CRI 2700K 120V LED HI-OUTPUT 90 CRI 2700K 120V-277V UNV LED LO-OUTPUT 90 CRI 3000K 120V LED HI-OUTPUT 90 CRI 3000K 120V-277V UNV LED LO-OUTPUT 90 CRI 2700K 277V LED LO-OUTPUT 90 CRI 3000K 277V		



Artisan molded glass treated with a special mirror-like coating creates two stunning visual effects – when illuminated, the partially opaque shade provides a glimpse of the light source within. When not illuminated, the shade resembles chrome-plated metal.



LAMPING

-h- (2) 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage radio lamps / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 56, Wall / P. 397

700FMMTN	SHADE COLOR	HARDWARE FINISH	LAMP	
	MC METALLIC CHROME	S SATIN NICKEL	-LED922	E26 LED 90 CRI 2200K 120V
			-LED927	E26 LED 90 CRI 2700K 120V



Minimalist design has never been so functional. When not illuminated, the fixture renders as a slim hollow vessel and nearly disappears given its matte white finish. When illuminated, the hidden indirect LEDs provide a glare-free light source with a plentiful punch.




700FMKAT13 SHADE FINISH
W MATTE WHITE

LAMP

-LED930 LED 90 CRI 3000K 120V **-LED930-277** LED 90 CRI 3000K 277V



Forward thinking design yields a sleek fixture with a unique tri-divided diffuser while thoughtful engineering yields a high-performing ceiling fixture with a backplate less than 0.2" thick to tightly hug the mounting surface.



LAMPING

- d- 36 watt, 1250 delivered lumen, 2700K or 3000K LED module ∕ Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

→ May be wall or ceiling mounted

ADA ADA Compliant

Complete photometrics available at www.techlighting.com


700FMTGN13 HARDWARE FINISH LAMP

S SATIN NICKEL

-LED927 LED 90 CRI 2700K 120V -LED927-277 LED 90 CRI 2700K 277V -LED930 LED 90 CRI 3000K 120V -LED930-277 LED 90 CRI 3000K 277V



The pinnacle of modern minimalist design paired with the very latest in LED module and diffusion technology. Three graduated diameters of this sleek solution allow for scalable use perfect for both residential and hospitality use.



LAMPING

-i- 6" Diameter: 12 watt, 696 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

13" Diameter: 36 watt, 1250 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

18" Diameter: 53 watt, 1608 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

May be wall or ceiling mounted

ADA ADA Compliant

700FMMGN	SIZ	E	Н	ARDWARE FINISH	LAMP	
	6	6"	S	SATIN NICKEL	-LED927	LED 90 CRI 2700K 120V
	13	13"			-LED927-277	LED 90 CRI 2700K 277V
	18	18"			-LED930	LED 90 CRI 3000K 120V
					-LED930-277	LED 90 CRI 3000K 277V



13" / CHROME




18" / SATIN NICKEL



24" / AGED BRASS

A universally appealing contemporary flush mount fixture featuring a sleek metal body in your choice of on-trend finishes with coordinating trim accessories. A frosted glass diffuser effectively controls the highly capable LED source.



LAMPING

-<u>h</u>- 13" Diameter: 22 watt, 1132 delivered lumen, 2700K or 3000K LED module \slash Dimmable with low-voltage electronic or triac dimmer

18" Diameter: 33 watt, 1692 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

24" Diameter: 45 watt, 3506 delivered lumen, 2700K or 3000K LED module \slash Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS



→ May be wall or ceiling mounted

ADA ADA Compliant



700FMLNC	SIZE	HARDWARE FINISH	LAMP	
	13 13"	A AGED BRASS	-LED927	LED 90 CRI 2700K 120V
	18 18"	C CHROME	-LED927-277	LED 90 CRI 2700K 277V
	24 24"	S SATIN NICKEL	-LED930	LED 90 CRI 3000K 120V
			-LED930-277	LED 90 CRI 3000K 277V



13" / AGED BRASS




18"/ CHROME



24" / SATIN NICKEL

A universally appealing contemporary flush mount fixture featuring a sleek metal body in your choice of on-trend finishes. A frosted glass diffuser effectively controls the highly capable LED source.




LAMPING

-i 3" Diameter: 22 watt, 1132 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

18" Diameter: 33 watt, 1692 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

24" Diameter: 45 watt, 3506 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS



ADA ADA Compliant

700FMVNC	SIZE	H	IARDWARE FINISH	LAMP	
	13 13" 18 18" 24 24"	Ċ	A AGED BRASS CHROME SATIN NICKEL	-LED930	LED 90 CRI 2700K 120V LED 90 CRI 2700K 277V LED 90 CRI 3000K 120V
				-LED930-277	LED 90 CRI 3000K 277V



SATIN NICKEL



An illuminated optic-grade glass ring gently protrudes from the stamped metal body and gives way to a central acrylic diffuser which effectively controls the powerful LED source.




700FMESC12	HARDWARE FINISH		LAMP		
	_	SATIN NICKEL WHITE		LED 90 CRI 2700K 120V	
		********	-LED930	LED 90 CRI 3000K 120V	





A modern, asymmetric outer metal shade gives way to a recessed acrylic diffuser which effectively controls the powerful LED source.



LAMPING

-i 33 watt, 1139 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

→ May be wall or ceiling mounted

ADA ADA Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Pendants / P. 68, 70

700FMRHNS INNER/OUTER SHADE FINISH LAMP

WW MATTE WHITE/WHITE

-LED930 LED 90 CRI 3000K 120V






MATTE WHITE / SATIN NICKEL BASE SMALL



MATTE WHITE / MATTE WHITE BASE LARGE

Concentric circular metal discs are painted in a matte white finish for an incredibly minimalist appeal. The lower disc pushes a wide-angle wash of LED light upward to provide plenty of indirect light for either accent or utility use.

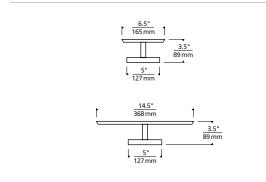

LAMPING

-h- 6" Diameter: 14 watt, 456 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

13" Diameter: 14 watt, 456 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ May be wall or ceiling mounted

ADA ADA Compliant

700FMCTC LENGTH

6 6" DIAMETER BASE 13 13" DIAMETER BASE


SHADE FINISH / BASE FINISH

WW MATTE WHITE / MATTE WHITE
WC MATTE WHITE / CHROME BASE WS MATTE WHITE / SATIN NICKEL BASE

-LED927 LED 90CRI 2700K 120V -LED927-277 LED 90CRI 2700K 277V



A thick, arched die-cast aluminum reflector is crafted using an artisanal sand casting process to produce an inherently rough signature texture. The deep weathered zinc finish creates sharp visual contrast to filaments within the vintage-style lamping.



LAMPING

120 volt 60 watt, medium base S26 Squirrel Cage lamp / Dimmable with standard incandescent dimmer

-<u>h</u>- 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage Squirrel Cage lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 36, Wall / P. 396

700FMFET SHADE/HARDWARE FINISH

LAMP


INCANDESCENT 120V

359



AGED BRASS / BRIGHT BRASS







MATTE WHITE / CHROME

Inspired by mid-century design, a simple sphere becomes an elegant contemporary statement when divided into three distinct regions. The finished metal housing is briefly separated from its glass diffuser by a contrasting decorative metal band.



LAMPING

-i- 14 watt, 640 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

LAMP

→ May be wall or ceiling mounted

COMPLEMENTARY PRODUCT

Pendant / P. 89, Wall / P. 402

700FMAKV SHADE / DETAIL FINISH

AGED BRASS / BRIGHT BRASS

-LED927 LED 90 CRI 2700K 120V





SMALL / GLOSS WHITE








SMALL / TRANSPARENT SMOKE

LARGE / TRANSPARENT SMOKE

The sleek glass shade is suspended from a handsome die-cast metal band just below the ceiling which hides the LED light source. The shade illuminates with an even glow free of hot spots found with traditional light sources.



LAMPING

-i- 15 watt, 1256 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Pendants / P. 136, 137


700FMMAN	SIZE	SHADE COLOR	BASE FINISH	LAMP	LAMP	
	S SMALL	WH GLOSS WHITE	S SATIN NICKEL	-LED	LED 80 CRI 3000K 120V	
	L LARGE	TK TRANSPARENT SMOKE		-LED277	LED 80 CRI 3000K 277V	





TRANSPARENT SMOKE

A sleek, closed bottom glass shade is suspended from a die-cast metal band just below the ceiling for a simple yet refined look. The hidden LED light source illuminates the shade with an even glow free of hot spots found with traditional light sources.



LAMPING

- 15 watt, 1256 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer


700FMCASD	SHADE COLOR	BASE FINISH	LAMP
	C CLEAR K TRANSPARENT SMOKE	S SATIN NICKEL	-LED830 LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V





LARGE / SATIN NICKEL

A precisely executed acrylic shade provides an incredibly smooth wash of light as it is intentionally interrupted by negative space in the center of the fixture for visual contrast. Three sizes offer designers the opportunity to address scale in spaces that demand larger solutions.



LAMPING



-i- Small: 22 watt, 400 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

Medium: 40 watt, 830 delivered lumen, 3000K LED $\scriptstyle /$ Dimmable with low-voltage electronic dimmer

Large: 61 watt, 1870 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ May be wall or ceiling mounted

♦ Wet listed for Indoor / Outdoor use

ADA ADA Compliant

COMPLEMENTARY PRODUCT

Ceiling / P. 365, 366

700FMWNTR	SIZE	HARDWARE FINISH	LAMP
	S SMALL M MEDIUM	Z ANTIQUE BRONZE S SATIN NICKEL	-LED830 LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V
	L LARGE		






MEDIUM / SATIN NICKEL



LARGE / ANTIQUE BRONZE

A precisely executed acrylic shade provides an incredibly smooth wash of light as it is intentionally interrupted by negative space in the center of the fixture for visual contrast. Three sizes offer designers the opportunity to address scale in spaces that demand larger solutions.



LAMPING

Small: 22 watt, 400 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

Medium: 40 watt, 830 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

Large: 61 watt, 1870 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ May be wall or ceiling mounted

♦ Wet listed for Indoor / Outdoor use

ADA ADA Compliant


COMPLEMENTARY PRODUCT

Ceiling / P. 363, 366

700FMWNTS	SIZE	HARDWARE FINISH	LAMP		
	S SMALL M MEDIUM L LARGE	Z ANTIQUE BRONZES SATIN NICKEL	-LED830 LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V		



Modern minimalist design exudes from this versatile and efficient LED flush mount. A precisely executed acrylic shade provides an incredibly smooth wash of light as it is intentionally interrupted by negative space in the center of the fixture for visual contrast.

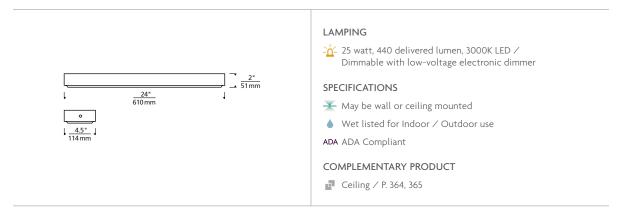

700WSWNT HARDWARE FINISH

Z ANTIQUE BRONZE S SATIN NICKEL

LED 80 CRI 3000K 120V -LED830 **-LED830-277** LED 80 CRI 3000K 277V




SMALL / ANTIQUE BRONZE



MEDIUM / SATIN NICKEL

Modern design collides with traditional elements in this ultra-chic LED flush mount. An acrylic diffuser is accented by over twenty faceted hand-cut optic crystals as it provides a beautifully consistent wash of light.



LAMPING

- Small: 22 watt, 400 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

Medium: 40 watt, 830 delivered lumen, 3000K LED $\scriptstyle /$ Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ May be wall or ceiling mounted

♦ Wet listed for Indoor / Outdoor use

ADA ADA Compliant

Complete photometrics available at www.techlighting.com

700FMKAL	SIZE	SHADE COLOR	HARDWARE FINISH	LAMP
	S SMALL M MEDIUM	C CLEAR CRYSTAL	Z ANTIQUE BRONZE S SATIN NICKEL	-LED830 LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V

367




SMALL / MATTE WHITE



LARGE / SATIN NICKEL

Sophisticated yet simple, this flush mount features a smoothly diffused LED source housed within an angular metal body in your choice of diameters.



LAMPING

Small: 22 watt, 1313 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

Large: 32 watt, 2008 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ May be wall or ceiling mounted

ADA ADA Compliant

700FMBES	SIZE	HARDWARE FINISH	LAMP
	S SMALL	W MATTE WHITE	-LED930 LED 90 CRI 3000K 120V






ROUND / ANTIQUE BRONZE



SQUARE / SATIN NICKEL

Clean lines and edge-lit LED light guide technology combine in this ultra-slim modern flush mount that is just two inches deep.



LAMPING

-h- Round: 29 watt, 1230 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

Square: 27 watt, 1450 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ May be wall or ceiling mounted

ADA ADA Compliant

700FMFIN	SHAPE	HARDWARE FINISH	LAMP	
	R ROUND	Z ANTIQUE BRONZE	-LED830 LED 80 CRI 3000K 120V	
	S SQUARE	S SATIN NICKEL	-LED830-277 LED 80 CRI 3000K 277V	




ROUND / ANTIQUE BRONZE



SQUARE / SATIN NICKEL

Clean lines and edge-lit LED light guide technology combine in this modern flush mount that 'floats' just below the ceiling.



LAMPING

Pound: 29 watt, 1230 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

Square: 27 watt, 1450 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Ceiling mounted only

700FMFINF	SHAPE	HARDWARE FINISH	LAMP	
	R ROUND	Z ANTIQUE BRONZE	-LED830 LED 80 CRI 3000K 120V	






LARGE / BRONZE



LARGE / CHARCOAL

A beautiful round pressed glass shade with a hand-polished surface is suspended from a die-cast metal base.



LAMPING

Small: 120 volt 40 watt, G9 base halogen lamp / Dimmable with standard incandescent dimmer

Large: (2) 120 volt 40 watt, G9 base halogen lamps \nearrow Dimmable with standard incandescent dimmer

-<u>h</u>- Small: 12 watt, 472 delivered lumen, 2700K, 3000K or 4000K LED module / Dimmable with a low-voltage electronic or triac dimmer

Large: 23 watt, 1143 delivered lumen, 2700K, 3000K or 4000K LED module / Dimmable with a low-voltage electronic or triac dimmer

SPECIFICATIONS

X LED may be mounted on the ceiling or wall

♦ All finishes suitable for wet locations

IP-65 Bronze and Charcoal finishes are IP-65 wet rated

ADA ADA Compliant

Dark Sky Compliant when ceiling mounted

700CQ	SIZE		H	ARDWARE FINISH*	LAMP		
	S	SMALL	Z	ANTIQUE BRONZE		INCANDESCENT 120V	
	L	LARGE	Н	CHARCOAL	-LED	LED 90 CRI 2700K 120V	
			C	CHROME	-LED277	LED 90 CRI 2700K 277V	
			S	SATIN NICKEL	-LED3	LED 90 CRI 3000K 120V	
					-LED3-277	7 LED 90 CRI 3000K 277V	
					-LED4	LED 90 CRI 4000K 120V	
					-LED4-27	7 LED 90 CRI 4000K 277V	








LARGE / SATIN NICKEL



LARGE / CHARCOAL

An ultra-clean, square pressed glass shade with a hand-polished surface is suspended from a die-cast metal base.



LAMPING

Small: 120 volt 40 watt, G9 base halogen lamp / Dimmable with standard incandescent dimmer

Large: (2) 120 volt 40 watt, G9 base halogen lamps / Dimmable with standard incandescent dimmer

-<u>h</u>- Small: 12 watt, 472 delivered lumen, 2700K, 3000K or 4000K LED module / Dimmable with a low-voltage electronic or triac dimmer

Large: 23 watt, 1192 delivered lumen, 2700K, 3000K or 4000K LED module / Dimmable with a low-voltage electronic or triac dimmer

SPECIFICATIONS

 \longrightarrow LED may be mounted on the ceiling or wall

♦ All finishes suitable for wet locations

IP-65 Bronze and Charcoal finishes are IP-65 wet rated

ADA ADA Compliant

Dark Sky Compliant when ceiling mounted

700BX	SIZE	HARDWARE FINISH*	LAMP
	S SMALL	Z ANTIQUE BRONZE	INCANDESCENT 120V
	L LARGE	H CHARCOAL	-LED LED 90 CRI 2700K 120V
		C CHROME	-LED277 LED 90 CRI 2700K 277V
		SATIN NICKEL	-LED3 LED 90 CRI 3000K 120V
			-LED3-277 LED 90 CRI 3000K 277V
			-LED4 LED 90 CRI 4000K 120V
			-I FD4-277 LED 90 CRL4000K 277V






SMALL / SATIN NICKEL



LARGE / ANTIQUE BRONZE

The Fluid is created by pouring molten glass into a contoured mold, letting it cool, and then fire-polishing it to a glossy finish. It gives the impression of flowing water frozen in time. The unique and elegant look of the piece changes at every angle based on how light hits the surface of the glass.



LAMPING

Small: 120 volt 40 watt, G9 base halogen lamp / Dimmable with standard incandescent dimmer

Large: (2) 120 volt 40 watt, G9 base halogen lamps / Dimmable with standard incandescent dimmer

Small: 12 watt, 472 delivered lumen, 2700K or 3000K LED module / Dimmable with a low-voltage electronic or triac dimmer

Large: 23 watt, 1143 delivered lumen, 2700K or 3000K LED module / Dimmable with a low-voltage electronic or triac dimmer

SPECIFICATIONS

igsep LED may be mounted on the ceiling or wall

♦ Ceiling mount suitable for wet locations

ADA ADA Compliant

700FMFLDR	SIZE	HARDWARE FINISH	LAMP	
	S SMALL L LARGE	Z ANTIQUE BRONZE C CHROME S SATIN NICKEL	-LED3	INCANDESCENT 120V LED 90 CRI 2700K 120V LED 90 CRI 2700K 277V LED 90 CRI 3000K 120V 7 LED 90 CRI 3000K 277V






SMALL / ANTIQUE BRONZE



LARGE / SATIN NICKEL

The Fluid is created by pouring molten glass into a contoured mold, letting it cool, and then fire-polishing it to a glossy finish. It gives the impression of flowing water frozen in time. The unique and elegant look of the piece changes at every angle based on how light hits the surface of the glass.



LAMPING

Small: 120 volt 40 watt, G9 base halogen lamp / Dimmable with standard incandescent dimmer

Large: (2) 120 volt 40 watt, G9 base halogen lamps / Dimmable with standard incandescent dimmer

Small: 12 watt, 472 delivered lumen, 2700K or 3000K LED module / Dimmable with a low-voltage electronic dimmer

Large: 23 watt, 1192 delivered lumen, 2700K or 3000K LED module / Dimmable with a low-voltage electronic dimmer

SPECIFICATIONS

 \longrightarrow LED may be mounted on the ceiling or wall

♠ Ceiling mount suitable for wet locations

ADA ADA Compliant

700FMFLDS	SIZE	HARDWARE FINISH	LAMP	
	S SMALL L LARGE	Z ANTIQUE BRONZE C CHROME S SATIN NICKEL	-LED -LED277 -LED3 -LED3-277	INCANDESCENT 120V LED 80 CRI 2700K 120V LED 80 CRI 2700K 277V LED 80 CRI 3000K 120V LED 80 CRI 3000K 277V



SMALL / ANTIQUE BRONZE



LARGE / SATIN NICKEL

L LARGE

Square shaped glass shade mounts flush to a plated base. Provides general illumination.

LAMPING

Small: (1) 120 volt 40 watt, G9 base halogen lamp / Dimmable with standard incandescent dimmer

Large: (2) 120 volt 40 watt, G9 base halogen lamps / Dimmable with standard incandescent dimmer

(2) 13 watt 2GX7 base twin tube lamps and electronic ballast / not dimmable

SPECIFICATIONS

Fluorescent version can be wall or ceiling mounted

ADA ADA Compliant





700FM90	SI	ZE	Н	HARDWARE FINISH		
	S	SMALL	Z	ANTIQUE BRONZE		

S SATIN NICKEL

-CF COMPACT FLUORESCE
-CF277 COMPACT FLUORESCE

COMPACT FLUORESCENT 120V (LARGE ONLY)
COMPACT FLUORESCENT 277V (LARGE ONLY)
COMPACT FLUORESCENT PROGRAMMED START 120V-277V



SMALL / ANTIQUE BRONZE



LARGE / SATIN NICKEL

Round shaped glass shade mounts flush to a plated base. Provides general illumination.

LAMPING



Small: (1) 120 volt 40 watt, G9 base halogen lamp / Dimmable with standard incandescent dimmer

Large: (2) 120 volt 40 watt, G9 base halogen lamps / Dimmable with standard incandescent dimmer

(2) 13 watt 2GX7 base twin tube lamps and electronic ballast not dimmable


SPECIFICATIONS

igsep Fluorescent version can be wall or ceiling mounted

ADA ADA Compliant

Complete photometrics available at www.techlighting.com





700FM360 SIZI	Ε
---------------	---

S SMALL Z ANTIQUE BRONZE L LARGE S SATIN NICKEL

LAMP

-CF -CF277 -PSUNV

INCANDESCENT 120V
COMPACT FLUORESCENT 120V (LARGE ONLY)
COMPACT FLUORESCENT 277V (LARGE ONLY)
COMPACT FLUORESCENT PROGRAMMED START 120V-277V




CONCRETE



WHITE

The ceramic shade of this contemporary LED flush mount is textured and painted by hand to create the rough and inherently unique appearance. The inner texture is highlighted by the softly diffused light emitted from a sleek acrylic dome.



LAMPING

-i- 24 watt, 1,125 delivered lumen, 3000K LED module or Warm Color Dimming 3000K-2200K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS



→ May be wall or ceiling mounted

ADA ADA Compliant

COMPLEMENTARY PRODUCT



Pendant / P. 66

700FMKRM SHADE COLOR

C CONCRETE W WHITE

-LEDWD LED WARM COLOR DIMMING 3000K-2200K 120V -LED930 LED 90 CRI 3000K 120V

380




CLEAR / SATIN NICKEL



SMOKE / SATIN NICKEL

A beautiful hand-blown glass shade seamlessly aligns with the metal body which houses two LED light sources. A powerful yet controlled center beam provides general illumination as an indirect ring of light provides visual contrast as you peer through the glass.



LAMPING

-14 watt, 338 delivered lumen, 3000K LED module or Warm Color Dimming 3000K-2200K LED module (uplight remains static) / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

700FMAMB	SHADE COLOR	HARDWARE FINISH	LAMP	
	C CLEAR K SMOKE	S SATIN NICKEL		LED WARM COLOR DIMMING 3000K - 2200K 120V LED 90 CRI 3000K 120V



This square fabric flush mount is finished with a glass diffuser which provides a glare free wash of light highlighted with satin nickel detail.


LAMPING



Small: (2) 60 watt A19 medium base lamps / Dimmable with standard incandescent dimmer

Large: (4) 60 watt A19 medium base lamps / Dimmable with standard incandescent dimmer

-i- 37 watt, 730 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic dimmer



700TDCHAFM	SIZE	SHADE COLOR	HARDWARE FINISH

S SMALL L LARGE C DESERT CLAY

S SATIN NICKEL

LAMP

INCANDESCENT 120V -I FD830 W WHITE LED 80 CRI 3000K 120V **-LED830-277** LED 80 CRI 3000K 277V



SMALL / DESERT CLAY



This round fabric flush mount is finished with a glass diffuser which provides a glare free wash of light highlighted with satin nickel detail.

LAMPING



Small: (2) 60 watt A19 medium base lamps / Dimmable with standard incandescent dimmer

Large: (4) 60 watt A19 medium base lamps / Dimmable with standard incandescent dimmer


-h- 37 watt, 730 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Pendant / P. 234, 236



700TDMULFM	SIZE	SHADE COLOR HARDWARE FINISH		LAMP	
	S SMALL	C DESERT CLAY	S SATIN NICKEL		INCANDESCENT 120V
	L LARGE	W WHITE		-LED830	LED 80 CRI 3000K 120V
				-I FD830-277	LED 80 CRI 3000K 277V






HEATHER GRAY / WALNUT TRIM



WHITE / MAPLE TRIM

This modern drum shade is elevated to a richer, warmer dimension with a sophisticated combination of fabric and wood. The bands of wood trim are spline joined around the circumference of the shade, a delicate feat of quality craftsmanship.



LAMPING

(4) 120 volt 60 watt, medium base A19 lamps / Dimmable with standard incandescent dimmer

-<u>h</u>- (4) 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamps / Dimmable with LED compatible dimmer

SPECIFICATIONS

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 238

700FMTPO	SHADE COLOR	WOOD TRIM HARDWARE FINISH		LAMP	
	Y HEATHER GRAY	M MAPLE	Z ANTIQUE BRONZE		INCANDESCENT 120V
	W WHITE	W WALNUT	S SATIN NICKEL	-LED927	A19 LED 90 CRI 2700K 120V






BLACK FABRIC





WHITE FABRIC

This round flush mount, with a tailored fabric shade, features two die-cast metal arms to add a nice contrast. A glass diffuser provides a glare free wash of light.



LAMPING



(2) 60 watt BT15 medium base lamps / Dimmable with standard incandescent dimmer

- (2) 120 volt 6.5 watt, 810 delivered lumen, 2700K, medium base LED BT15 lamp / Dimmable with LED compatible dimmer

700FMBXT	SHADE COLOR		Н	ARDWARE FINISH	LAMP	
	FB FW MT	BLACK FABRIC WHITE FABRIC METAL		ANTIQUE BRONZE SATIN NICKEL	-LED827	INCANDESCENT 120V BT15 LED 80 CRI 2700K 120V





CLEAR / ANTIQUE BRONZE

CLEAR / POLISHED NICKEL

This retro-inspired fixture features a classic clear glass cylinder which surrounds vintage style lamping.



LAMPING

Ā

120 volt 40 watt medium base Classic Edison Style lamp / Dimmable with standard incandescent dimmer

- 120 volt 3.5 watt, 250 delivered lumen, 2200K or 2700K, medium base LED vintage Squirrel Cage lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant P. 249

600CLKC	SHADE COLO

C CLEAR

HARDWARE FINISH

Z ANTIQUE BRONZE

N POLISHED NICKEL
S SATIN NICKEL


LAMP

-LED922 INCANDESCENT 120V -LED927 ST19 LED 90 CRI 2200K 120V -LED927 ST19 LED 90 CRI 2700K 120V





Streams of Italian glass piping are formed into a graceful glass bowl and highlighted with metal details, creating an unmistakable sparkle in any space.



LAMPING

Small: (2) 120 volt 60 watt, clear A19 medium base lamps / Dimmable with standard incandescent dimmer

Large: (4) 120 volt 60 watt, clear A19 medium base lamps / Dimmable with standard incandescent dimmer

-<u>h</u>- Small: (2) 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamps / Dimmable with LED compatible dimmer

Large: (4) 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamps / Dimmable with LED compatible dimmer

SPECIFICATIONS

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Ceiling / P. 298

700FMTRAS	SIZE	SHADE COLOR	HARDWARE FINISH	LAMP	
	LARGE - 23" DIAMETER	C CRYSTAL	Z ANTIQUE BRONZE		INCANDESCENT 120V
	S SMALL - 16" DIAMETER		S SATIN NICKEL	-LED927	A19 LED 90 CRI 2700K 120V






$\left\langle \right\rangle$







An open cylindrical silhouette featuring evenly spaced decorative fins adds a modern look to any façade. Three mounting options enable the fixture to be installed at different positions relative to the backplate to meet a variety of applications and aesthetics.



LAMPING

-i120-277 universal voltage 16 watt, 598 delivered lumen, 3000K and 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

→ 3-position variable height mounting / Mounts down only


IP-65 IP65 wet listed for indoor / outdoor use

C Dark Sky Compliant

T24 Title 24 Compliant


Complete photometrics available at www.techlighting.com

7000WTUR	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTION	IS
	830 80 CRI, 3000K 840 80 CRI, 4000K	18 18"	C CLEAR FLAT	Z BRONZE H CHARCOAL	UNV 120V-277V	S SYMMETRIC	PC LF SP PCLF PCSP LFSP	NONE BUTTON PHOTOCONTROL IN-LINE FUSE SURGE PROTECTION BUTTON PHOTOCONTROL & IN-LINE FUSE BUTTON PHOTOCONTROL & SURGE PROTECTION IN-LINE FUSE PROTECTION BUTTON PHOTOCONTROL BUTTON PHOTOCONTROL IN-LINE FUSE & SURGE PROTECTION BUTTON PHOTOCONTROL IN-LINE FUSE & SURGE IN-LINE FUSE & SURGE
ITING.COM								PROTECTION

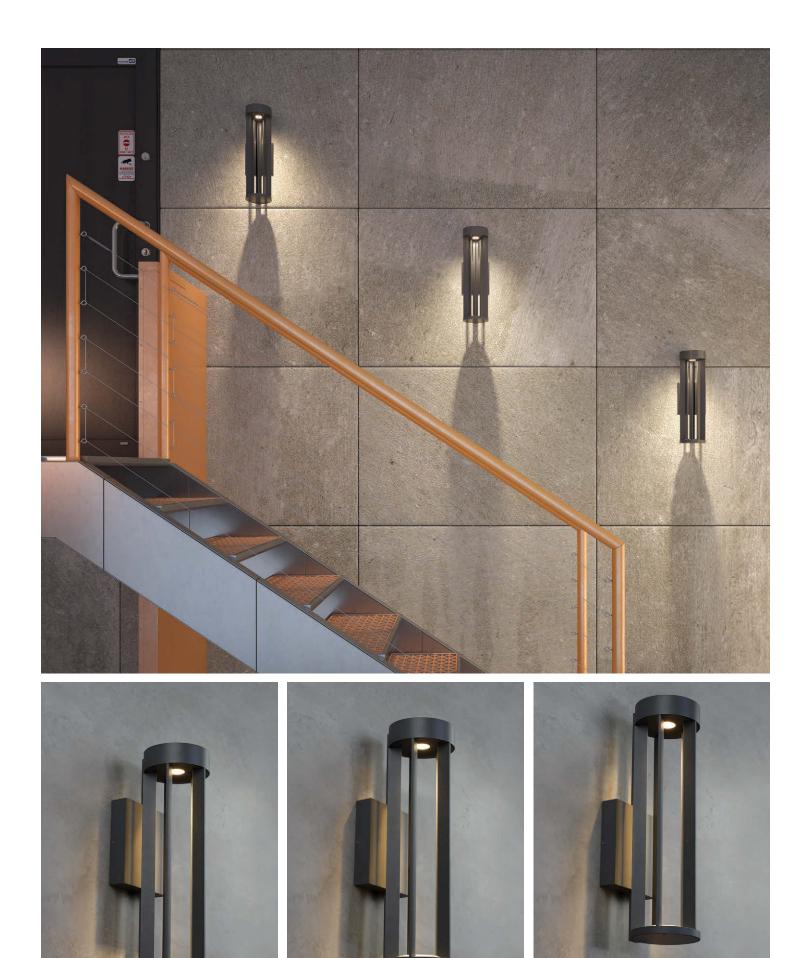



Contemporary styling with a warm, multidimensional glow projects from the combination of semi-enclosed round shade and contrasting elongated rectangular diffuser.

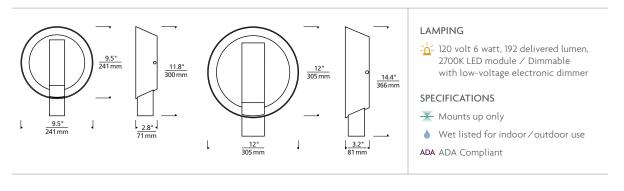


700WSRRFG	SIZE	SHADE FINISH (OUTER / INNER)	LAMP		
	S SMALL	HS CHARCOAL / SATIN HAZE 7G ANTIQUE BRONZE / GOLD HAZE	-LED927 LED 90CRI 2700K 120V		





CHARCOAL / SATIN HAZE LARGE

Contemporary styling with a warm, multidimensional glow projects from the combination of semi-enclosed rectangular shade and complementary diffuser.

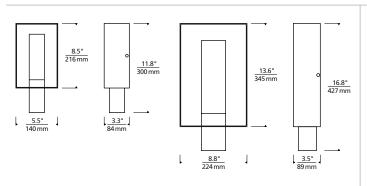

LAMPING

120 volt 6 watt, 192 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Mounts up only


♦ Wet listed for indoor / outdoor use

ADA ADA Compliant

700WSRFG	SIZE	SHADE FINISH (OUTER / INNER)	LAMP		
		HS CHARCOAL/STAIN HAZE		LED 90CRI 2700K 120V	



A thick, concave die-cast aluminum backplate is crafted using an artisanal sand casting process to produce an inherently rough signature texture. The deep weathered zinc finish creates sharp visual contrast to filaments within the Edison-style lamping.



LAMPING

120 volt 60 watt, medium base S21 Squirrel Cage lamp $\scriptstyle /$ Dimmable with standard incandescent dimmer

-i- 120 volt 3.5 watt, 300 delivered lumen, 2200K or 2700K, medium base LED vintage Squirrel Cage lamp / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

Mounts up or down

ADA ADA Compliant

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 36, Ceiling / P. 359

700WSFET SHADE COLOR / HARDWARE FINISH

E WEATHERED ZINC


-LED922 ST19 LED 90 CRI 2200K 120V -LED927 ST19 LED 90 CRI 2700K 120V

396



Artisan molded glass treated with a special mirror like coating creates two stunning visual effects — when illuminated, the partially opaque shade provides a glimpse of the light source within.

When not illuminated, the shade resembles molten metal.



LAMPING

-i- 120 volt 2 watt, 155 delivered lumen, 2200K or 2700K, E12 base LED vintage tubular lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

→ Mounts up or down

ADA ADA Compliant

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 56, Ceiling / P. 347

 700WSMTN
 SHADE COLOR
 HARDWARE FINISH
 LAMP

 MC
 METALLIC CHROME
 S SATIN NICKEL
 -LED922 -LED927
 T6 LED 90 CRI 2200K 120V 16 LED 90 CRI 2700K 120V








SMOKE / BLACK

Overlapping panes of gently slumped glass shield a smoothly diffused linear LED source, all within an ultra-slim profile. Coordinating chandeliers enable coordination from residential dining and media rooms to commercial hospitality and corporate spaces.



LAMPING

-i- 120-277 universal voltage 18 watt, 1159 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic, triac or 0-10v dimmer

SPECIFICATIONS

→ Mounts horizontally or vertically

ADA ADA Compliant

COMPLEMENTARY PRODUCT

Chandelier / P. 282

700WSSTR	SIZE	GLASS COLOR / HARDWARE FINISH	LAMP
	18 18"	FS FROST / SATIN NICKEL	-LED927 LED 90 C

FS FROST/SATIN NICKEL
KB SMOKE/BLACK


-LED927 LED 90 CRI 2700K 120V-277 UNV





TRANSPARENT SMOKE SATIN NICKEL

A sleek decorative backplate supports a glass orb featuring gradually thickening interior bands which make a serenely alluring visual statement. Complementary pendants and chandeliers can be used in conjunction for a unified lighting scheme.



LAMPING

-120 volt 2 watt, 155 delivered lumen, 2200K or 2700K, E12 base LED vintage tubular lamp / Dimmable with LED compatible dimmer

SPECIFICATIONS

→ Mounts up or down

T24 LED includes Title 24 Compliant lamp


COMPLEMENTARY PRODUCT

Pendants / P. 90, 91, Chandelier / P. 268

700WSSDN	GLASS COLOR	HARDWARE FINISH	LAMP	
	C CLEAR	R AGED BRASS	-LED922	T6 LED 90 CRI 2200K 120V
	T TRANSPARENT SMOKE	S SATIN NICKEL	-LED927	T6 LED 90 CRI 2700K 120V



Undeniable beauty and transitional style are instantly apparent in this broadly appealing design in which contrasting elements converge. Hard lines and soft curves, along with modern and retro influences create a distinctive, warm look.

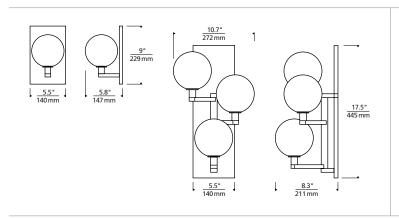

LAMPING

(1) or (3) 120 volt 2 watt, 155 delivered lumen, 2200K or 2700K, E12 base LED vintage tubular lamps / Dimmable with LED compatible or triac dimmer

SPECIFICATIONS

Mounts up or only

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Chandelier / P. 258, 260

700WSGMB	SIZE	GLASS COLOR HARDWARE FINISH		LAMP	
	S SINGLE	C CLEAR	R AGED BRASS	-LED922 T6 LED 90CRI 2200K 120V	
	T TRIPLE		S SATIN NICKEL	-LED927 T6 LED 90CRI 2700K 120V	










MATTE WHITE / CHROME

Inspired by mid-century design, a simple sphere becomes an elegant contemporary statement when divided into three distinct regions. Each finished metal housing is briefly separated from its glass diffuser by a complementary decorative metal band.



LAMPING

120 volt 14 watt, 640 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Mounts up or down

COMPLEMENTARY PRODUCT

Pendant / P. 89, Ceiling / P. 360

700WSAKV SHADE/TRIM FINISH

LAMP

RR AGED BRASS / BRIGHT BRASS

-LED927 LED 90 CRI 2700K 120V


BR MATTE BLACK / AGED BRASS
WC MATTE WHITE / CHROME







A sleek metal backplate treated with a special coating to replicate the warm look and texture of real woods including oak, ash or chestnut, is gently illuminated by a directional LED shrouded in a ring of pure optic crystal.



LAMPING

9 watt, 192 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ Mounts up only

ADA ADA Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Pendants / P. 60, 62, Linear Suspension / P. 318

700WSDBS INSERT FINIS

HARDWARE FINISH

LAMP

N BROWN CHESTNUT
Y WEATHERED GRAY OAK
A WHITE ASH

S SATIN NICKEL

-LED927 LED 90 CRI 2700K 120V -LED927-277 LED 90 CRI 2700K 277V



SATIN NICKEL / SATIN NICKEL







WHITE / WHITE

Ultimately simple and undeniably stylish, this LED wall sconce provides bi-directional illumination from its gently angled shade mounted to a slim metal backplate.

Available in your choice of painted metal or solid walnut.





LAMPING

-i- 12 watt, 255 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Mounts horizontally or vertically

ADA ADA Compliant

Complete photometrics available at www.techlighting.com

700WSCAFE SHADE/HARDWARE FINISH

SS SATIN NICKEL/SATIN NICKEL
WS WALNUT WOOD/SATIN NICKEL
WW WHITE/WHITE

LAMP

-LED930 LED 90 CRI 3000K 120V **-LED930-277** LED 90 CRI 3000K 277V





ANTIQUE BRONZE / CLEAR ROUND



BLACK / SMOKE ROUND





WHITE / SMOKE SQUARE

Simple elegance defined. A handsome die-cast metal body is echoed by symmetrical reveals cut from a solid piece of optically pure crystal. Beautiful LED light pours from the top and bottom of the thick-cut crystal to provide a surplus of illumination.





LAMPING



9 watt 560 delivered lumen, 3000 LED module / Dimmable with low-voltage electric dimmer

SPECIFICATIONS



Mounts horizontally or vertically

ADA ADA Compliant

COMPLEMENTARY PRODUCT

Wall / P. 407, 408


700WSVOT	SHAPE	GLASS COLOR	HARDWARE FINISH	LAMP
	R ROUND S SQUARE	C CLEAR K SMOKE	Z ANTIQUE BRONZE B BLACK S SATIN NICKEL	-LED830 LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V
			W WHITE	





CHARCOAL

In dramatic contrast to the durable die-cast metal body, beautiful LED light pours from the thick-cut, optic-grade acrylic of this contemporary indoor/outdoor wall sconce to provide ample ambient illumination. Choice of light distribution ensures maximum utility.



LAMPING

- Up & Downlight: 120-277 universal voltage 20 watt, 909 delivered lumen, 3000K OR 4000K LED module ∕ Dimmable with low-voltage electronic or 0-10v dimmer

Downlight Only: 120-277 universal voltage 12 watt, 538 delivered lumen, 3000K OR 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

→ Mounts up or down

IP-65 IP65 wet listed for indoor / outdoor use

Dark Sky Compliant (downlight version only)

T24 Title 24 Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Wall / P. 406, 408


7000WVOT	CRI / CCT	LENGTH	FINISH	FUNCTION*	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 C 3000 840 80 C 4000	K RI	Z BRONZE H CHARCOAL	DO DOWNLIGHT ONLY UD UPLIGHT / DOWNLIGHT	UNV 120V-277V	S SYMMETRIC	NONE PC BUTTON PHOTOCONTROL LF IN-LINE FUSE SP SURGE PROTECTION PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION PCLFSP IN-LINE FUSE & SURGE PROTECTION PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION





In dramatic contrast to the durable die-cast metal body, beautiful LED light pours from the thick-cut, optic-grade acrylic of this contemporary indoor/outdoor wall sconce to provide ample ambient illumination. Choice of light distribution ensures maximum utility.

<u>-c</u>



LAMPING

- Up & Downlight: 120-277 universal voltage 28 watt, 1394 delivered lumen, 3000K or 4000K LED module ∕ Dimmable with low-voltage electronic or 0-10v dimmer

Downlight Only: 120-277 universal voltage 14 watt, 672 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

→ Mounts up or down

IP-65 IP65 wet listed for indoor / outdoor use

Dark Sky Compliant (downlight version only)

T24 Title 24 Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Wall / P. 406, 407

7000WVOT	CRI / CCT	LENGTH	FINISH	FUNCTION*	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI 3000K 840 80 CRI 4000K	8 8"	Z BRONZE H CHARCOAL	DO DOWNLIGHT ONLY UD UPLIGHT/ DOWNLIGHT	UNV 120V-277V	S SYMMETRIC	NONE PC BUTTON PHOTOCONTROL LF IN-LINE FUSE SP SURGE PROTECTION PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION IN-LINE FUSE & SURGE PROTECTION PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION


^{*} DOWNLIGHT - 9W/850 LUMENS; UP & DOWNLIGHT - 18W/1500 LUMENS





20"/ CHARCOAL

This classically elegant contemporary design softly disperses LED light up and down, creating beautiful accent lighting effects. Three mounting options enable installation at different positions relative to the backplate to meet a variety of applications.

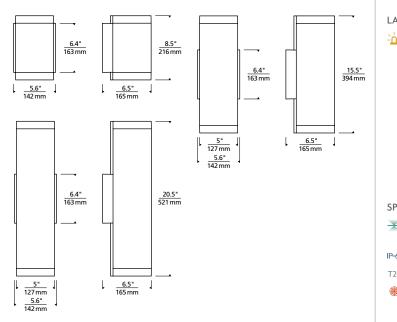

LAMPING

-<u><u></u><u></u> 8": 120-277 universal voltage 16 watt,</u> 464 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

15": 120-277 universal voltage 24 watt, 1334 delivered lumen, 3000K and 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

20": 120-277 universal voltage 30 watt, 1480 delivered lumen, 3000K and 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

➤ Mounts up only / 15" & 20": 3-position variable height mounting

IP-65 IP65 wet listed for indoor / outdoor use

T24 Title 24 Compliant

Complete photometrics available at www. techlighting.com

7000WGAG	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI 3000K 840 80 CRI 4000K	8 8" 15 15" 20 20"	D DIFFUSE	Z BRONZE H CHARCOAL	UNV 120V-277V	S SYMMETRIC	NONE PC BUTTON PHOTOCONTROL LF IN-LINE FUSE SP SURGE PROTECTION PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION IN-LINE FUSE & SURGE PROTECTION















18" / GRAY

Understated modern design characterizes this indoor/outdoor wall sconce. Well-controlled light distribution options including up/down and down-only lighting allow beautiful accent and secure ambient illumination from a singular fixture profile.

12" 305 mm 18" 457 mm

LAMPING

-i- 12" Up & Downlight: 120-277 universal voltage 29 watt, 2346 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

12" Downlight Only: 120-277 universal voltage 16 watt, 1212 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

18" Up & Downlight: 120-277 universal voltage 30 watt, 2419 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

18" Downlight Only: 120-277 universal voltage 16 watt, 1212 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS



Mounts down only

IP-65 IP65 wet listed for indoor / outdoor use

Dark Sky Compliant (downlight version only)

T24 Title 24 Compliant

Complete photometrics available at www.techlighting.com


700OWTEG	CRI / CCT	LENGTH	BEAM SPREAD*	LENS	FINISH	FUNCTION	VOLTAGE	OPTIONS
	830 80 CRI 3000K 840 80 CRI 4000K	12 12" 18 18"	N 10° NARROW W 36° WIDE NN 10° UP AND DOWN WW 36° UP AND DOWN NW 10° AND 36°	C CLEAR	Z BRONZE H CHARCOAL Y GRAY	DO DOWNLIGHT ONLY UD UPLIGHT / DOWNLIGHT	UNV 120V-277V	NONE PC BUTTON PHOTOCONTROL LF IN-LINE FUSE SP SURGE PROTECTION PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE BUTTON PHOTOCONTROL & SURGE PROTECTION PCLFSP IN-LINE FUSE & SURGE PROTECTION PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION







Clean, modern design and outstanding light performance clearly set this LED fixture apart. This simple yet effective wall sconce is ideal in commercial and residential applications where well-defined and security-minded illumination is required.



LAMPING

-i- 120-277 universal voltage 10 watt, 625 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

→ Mounts down only

IP-6 IP65 wet listed for indoor / outdoor use

C Dark Sky Compliant

T24 Title 24 Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Outdoor / P. 416

7000WTAG	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTION	IS
	830 80 CRI, 3000K 840 80 CRI, 4000K	6 6"	D DIFFUSE	Z BRONZE H CHARCOAL	UNV 120V-277V	S SYMMETRIC	PC LF SP PCLF	NONE BUTTON PHOTOCONTROL IN-LINE FUSE SURGE PROTECTION BUTTON PHOTOCONTROL & IN-LINE FUSE
							PCSP	BUTTON PHOTOCONTROL & SURGE PROTECTION
							LFSP	IN-LINE FUSE & SURGE PROTECTION
							PCLFSP	BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION








CHARCOAL

Clean, modern design and outstanding light output clearly set this ultra-high output LED fixture apart. This simple yet effective wall sconce is ideal in commercial and residential applications where well-defined and security-minded illumination is required.

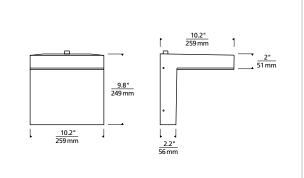

LAMPING

-i- 120-277 universal voltage 78 watt, 7800 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

→ Mounts down only

IP-6 IP65 wet listed for indoor / outdoor use

C Dark Sky Compliant

T24 Title 24 Compliant


COMPLEMENTARY PRODUCT

Outdoor / P. 414

7000WTAG	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTION	NS
	830 80 CRI, 3000K 840 80 CRI, 4000K	10 10"	D DIFFUSE	Z BRONZE H CHARCOAL	UNV 120V-277V	3 TYPE 3 DIST. 4 TYPE 4 DIST.	PC LF SP PCLF PCSP	NONE BUTTON PHOTOCONTROL IN-LINE FUSE SURGE PROTECTION BUTTON PHOTOCONTROL & IN-LINE FUSE BUTTON PHOTOCONTROL & SURGE PROTECTION IN-LINE FUSE & SURGE
							PCLFSP	PROTECTION BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION



Composed of a single die-cast metal plane angled outward to provide directional architectural accent lighting, this simple fixture is the epitome of minimalist modern design. Its sleek profile is ideal for enforcing a clean, yet dramatic aesthetic indoors or out.



LAMPING

-i- 120-277 universal voltage 10 watt, 235 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

→ Mounts up or down

IP-65 IP65 wet listed for indoor / outdoor use


Dark Sky Compliant (downlight / version only)

T24 Title 24 Compliant

Complete photometrics available at www.techlighting.com


7000WTAG	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	830 80 CRI, 3000K	6 6"	D DIFFUSE	Z BRONZE	120 120V	S SYMMETRIC	NONE IN LUNE FLISE



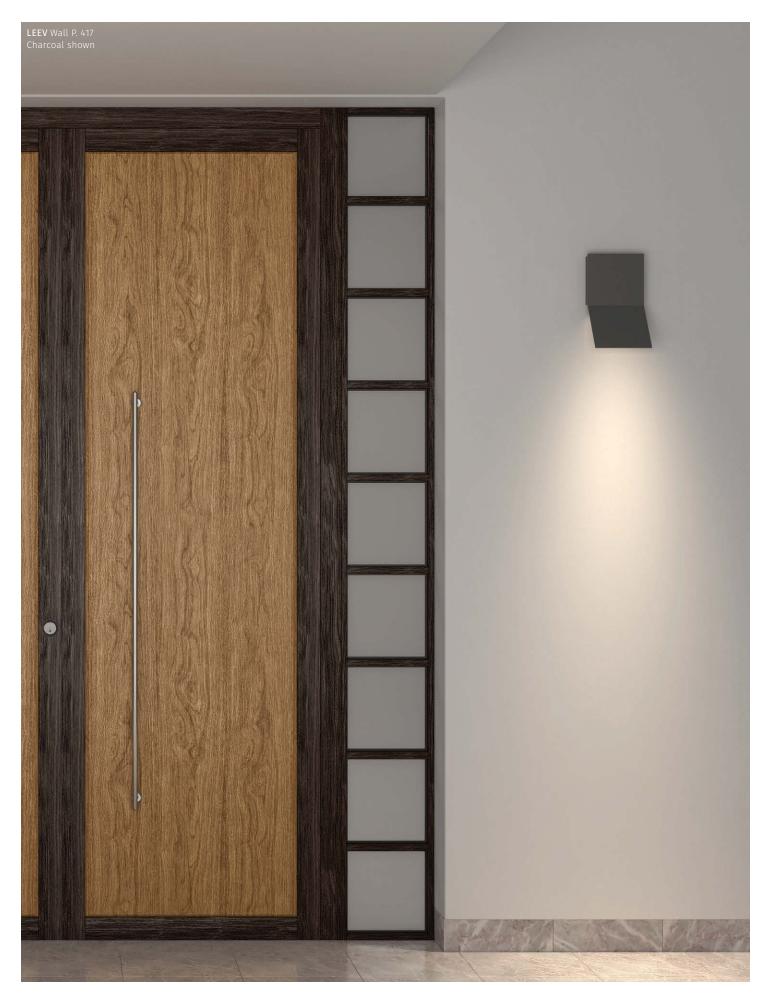



The powerful bi-directional light distribution ensures this wall sconce puts function first, and the clean, asymmetric shape delivers a highly versatile, widely appealing design.

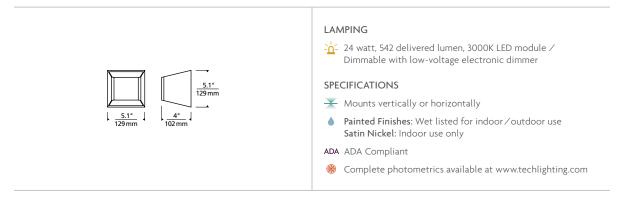

700WSEBB	SHADE FINISH	LAMP				
	 B BLACK BRONZE GRAY S SATIN NICKEL (INDOOR USE ONLY) 		LED 90 CRI 3000K 120V LED 90 CRI 3000K 277V			





Architectural design and significant light output define this modern LED wall fixture suitable for both indoor and outdoor applications. A die-cast metal body available in three sizes houses powerful LED light sources that create visual appeal as light cascades from one tier to the next.

700WSPIT	SIZE	SHADE FINISH	LAMP			
	S SINGLE D DOUBLE T TRIPLE	B BLACKZ BRONZEH CHARCOALI SILVER	-LED830 LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V			







3.9" J 14.8" 376 mm

LAMPING

- Single: 26 watt, 823 delivered lumen, 3000K LED module ∕ Dimmable with low-voltage electronic dimmer

Double: 48 watt, 1193 delivered lumen, 3000K LED module $\scriptstyle /$ Dimmable with low-voltage electronic dimmer

Triple: 64 watt, 1486 delivered lumen, 3000K LED module \angle Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Mounts up or down indoors / Mounts down only outdoors

IP-65 IP65 wet listed for indoor \checkmark outdoor use

ADA ADA Compliant

🖒 Dark Sky Compliant (downlight / version only)

T24 Title 24 Compliant

Complete photometrics available at www.techlighting.com












The clean, classic table lamp silhouette created by a one piece die-cast aluminum body makes this fixture well-suited for both indoor and outdoor applications. At its core, a powerful LED light source provides well-controlled directional illumination.

LAMPING

-h- 18 watt, 699 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

- → Mounts down only
- Wet listed for indoor/outdoor use
- Dark Sky Compliant
- T24 Title 24 Compliant
- Complete photometrics available at www.techlighting.com



700WSBOW4 SHADE FINISH

- Z ANTIQUE BRONZE
- H CHARCOAL
- W WHITE
- LAMP
- LED 80 CRI 3000K 120V -LED830
- -LED830-277 LED 80 CRI 3000K 277V



BLACK




The clean, classic table lamp silhouette created by a one piece die-cast aluminum body makes this fixture well-suited for both indoor and outdoor applications. At its core, a powerful LED light source provides well-controlled directional illumination.

LAMPING

47 watt, 1163 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

- Mounts down only
- Wet listed for indoor/outdoor use
- C Dark Sky Compliant
- T24 Title 24 Compliant
- Complete photometrics available at www.techlighting.com



700WSBOW6 SHADE FINISH

LAMP

- Z ANTIQUE BRONZE
- **B** BLACK H CHARCOAL
- SILVER
- W WHITE
- -LED830
- LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V





CHARCOAL W/ DIFFUSER



5.6" 142 mm



Architectural geometry is manifested in the conical shape of this contemporary wall sconce. Together with its generous upper and lower openings, the fixture's white acrylic or metal shade either creates soft up and down or ambient LED illumination.

LAMPING



Diffuse: 120-277 universal voltage, 13 watt, 525 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

Metal: 120-277 universal voltage, 13 watt, 198 delivered lumen, 3000K or 4000K LED module $\stackrel{\prime}{}$ Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

→ Mounts down only

IP-65 IP65 wet listed for indoor / outdoor use

T24 Title 24 Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

■ Wall / P. 430

7000WKO	N CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	OPTICS	OPTIONS
	830 80 CRI, 3000K 840 80 CRI, 4000K		D DIFFUSEM METAL	Z BRONZE H CHARCOAL	120 120V 277 277V	S SYMMETRIC	NONE LF IN-LINE FUSE
				V CDAV			










Architectural geometry is manifested in the conical shape of this contemporary wall sconce. Together with its generous upper and lower openings, the fixture's translucent white acrylic shade creates soft up, down and ambient LED illumination.



LAMPING

-ir Diffuse: 120-277 universal voltage, 29 watt, 1330 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

Metal: 120-277 universal voltage, 29 watt, 2315 delivered lumen, 3000K or 4000K LED module $\scriptstyle /$ Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

→ Mounts down only

IP-65 IP65 wet listed for indoor / outdoor use

T24 Title 24 Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

■ Wall / P. 428

7000WKON	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	OPTICS	OPTIONS
	830 80 CRI, 3000K 840 80 CRI, 4000K	17 17"	D DIFFUSE M METAL	Z BRONZEH CHARCOALY GRAY	120 120V 277 277V	S SYMMETRIC	PC BUTTON PHOTOCONTROL LF IN-LINE FUSE SP SURGE PROTECTION PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION PCLFSP BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION






This modern take on the classic one-, three-, four-, and five-light vanity fixture features a handsome full-length backplate with crisp metal details and rectangular molded glass shades for a tailored, sophisticated look.

700BCARS	LENGTH	HARDWARE FINISH	LAMP			
	 1 -LITE WALL 3 -LITE VANITY 4 -LITE VANITY 5 -LITE VANITY 	C CHROME S SATIN NICKEL	-LED927 -LED927-277	LED 90 CRI 2700K 120V LED 90 CRI 2700K 277V		





SATIN NICKEL 5-LITE VANITY

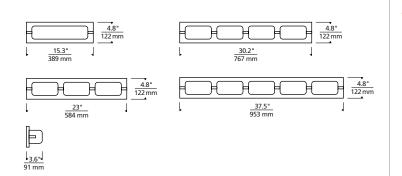

LAMPING

- 1-Lite: 120 volt 25 watt, 860 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

3-Lite: 120 volt 30 watt, 1290 total delivered lumen, 2700K LED modules / Dimmable with low-voltage electronic dimmer

4-Lite: 120 volt 40 watt, 1720 total delivered lumen, 2700K LED modules / Dimmable with low-voltage electronic dimmer


5-Lite: 120 volt 50 watt, 2150 total delivered lumen, 2700K LED modules / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ Mounts horizontally or vertically



In this universally appealing fixture, basic contemporary styling comes to life as linear and curved elements converge in a design offering superior performance at an exceptional value.

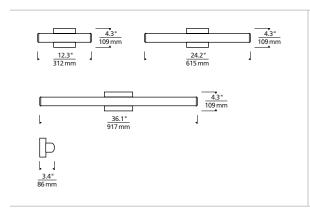

LAMPING

-i- 13": 120 volt 10 watt, 400 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

24": 120 volt 20 watt, 800 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

36": 120 volt 30 watt, 1200 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer


SPECIFICATIONS

→ Mounts horizontally or vertically

700BCBAS	LENGTH	HARDWARE FINISH	LAMP	
	13 13"	C CHROME	-LED927	LED 90 CRI 2700K 120V
	24 24"	S SATIN NICKEL	-LED927-277	LED 90 CRI 2700K 277V



A rounded wedge-shaped molded glass diffuser directionally distributes the fixture's abundant LED light, making it great for vanity applications vertically flanking a mirror.

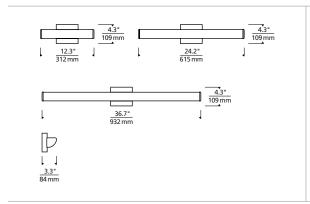

LAMPING

-i- 13": 120 volt 10 watt, 400 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

24": 120 volt 20 watt, 800 delivered lumen, 2700K LED module $\scriptstyle /$ Dimmable with low-voltage electronic dimmer

36": 120 volt 30 watt, 1200 delivered lumen, 2700K LED module \angle Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ Mounts horizontally or vertically


700BCADR	LEN	NGTH	HA	ARDWARE FINISH	LAMP	
	13	13"	C	CHROME	-LED927	LED 90 CRI 2700K 120V
	24	24"	S	SATIN NICKEL	-LED927-277	LED 90 CRI 2700K 277V
	20	201				



Dual frosted glass diffusers are separated by a sleek band of metal to evenly distribute the crisp LED light either up and down or side to side depending on mounting direction.

700BCTFN	LENGTH	Н	ARDWARE FINISH	LAMP	
	24 24"	S	SATIN NICKEL	-LED927	LED 90 CRI 2700K 120V
	36 36"	W	/ WHITE	-I FD927-277	LED 90 CRI 2700K 277V





LAMPING

- 24": 120 volt 20 watt, 860 delivered lumen, 2700K LED module \angle Dimmable with low-voltage electronic dimmer

 $36\mbox{":}\ 120\ \mbox{volt}\ 30\ \mbox{watt}, 1290\ \mbox{delivered lumen}, 2700\mbox{K LED module}\ /\ \mbox{Dimmable with low-voltage electronic dimmer}$

SPECIFICATIONS


→ Mounts horizontally or vertically



A unique wedge-shaped molded glass diffuser effectively distributes the fixture's abundant LED light while creating a more transitional, mid-century inspired appeal.

700BCVOS	LENGTH	HARDWARE FINISH	LAMP		
	13 13" 24 24" 36 36"	C CHROME S SATIN NICKEL	-LED927 LED 90 CRI 2700K 120V LED 90 CRI 2700K 277V		





LAMPING

-ii- 13": 120 volt 10 watt, 400 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

 $24"\!:\!120$ volt 20 watt, 800 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer


 $36\rlap{''}:$ 120 volt 30 watt, 1200 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ Mounts horizontally or vertically



Ultra-modern appeal exudes from this extremely slim, yet bold, bath bar. The 45° optic-quality acrylic diffuser effectively and evenly disperses light from the high-powered LED module hidden within.



LAMPING

-i- 25": 120 volt 20 watt, 1409 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

 $37^{\prime\prime}\!\!:120$ volt 32 watt, 2113 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS


Mounts vertically or horizontally

ADA ADA Compliant

Complete photometrics available at www.techlighting.com

700BCYKN	LENGTH	HARDWARE FINISH	LAMP	
	25 25"	W MATTE WHITE	-LED927	LED 90 CRI 2700K 120V
	37 37"	S SATIN NICKEL	-LED927-277	LED 90 CRI 2700K 277V
			-LED930	LED 90 CRI 3000K 120V
			-I ED030-277	LED OU CBI SUUUK 377\/




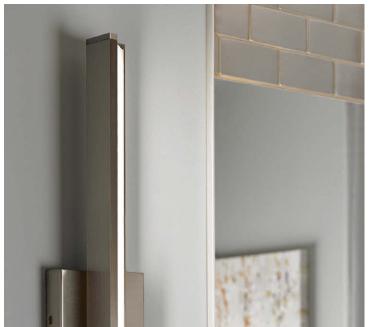





An oval inner glass diffuser is beautifully echoed by its secondary semi-translucent micro-frosted glass diffuser to create alluring dimensional depth and warm functional illumination.

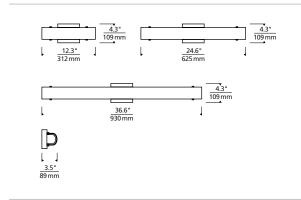

LAMPING

-h- 13": 120 volt 10 watt, 350 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

24": 120 volt 20 watt, 700 delivered lumen, 2700K LED module $\scriptstyle /$ Dimmable with low-voltage electronic dimmer

36": 120 volt 30 watt, 1050 delivered lumen, 2700K LED module \angle Dimmable with low-voltage electronic dimmer


SPECIFICATIONS

→ Mounts horizontally or vertically

700BCHALO	LENG	тн н	IARDWARE FINISH	LAMP	
	13 1: 24 2:	_	CHROME SATIN NICKEI		LED 90 CRI 2700K 120V
	36 3		5/ 11114 141 CITEL		LEB 30 CIII E700ICE777



A smart collaboration of geometric design and modern materials, this sconce features a choice of a sand blasted acrylic diffuser or clear optic-grade acrylic diffuser to illuminate your space with highly effective light distribution and a custom look.

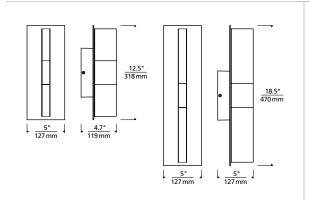

LAMPING

12": 120-277 universal voltage 10 watt, 286 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

18": 120-277 universal voltage 10 watt, 282 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

→ Mounts vertically or horizontally

IP-65 IP65 wet listed for indoor / outdoor use


T24 Title 24 Compliant

7000WLYT	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIO	NS
	830 80 CRI, 3000K 840 80 CRI, 4000K	12 12" 18 18"	C CLEAR D DIFFUSE	Z BRONZEH CHARCOAL	UNV 120V-277V	S SYMMETRIC	LF SP LFSP	NONE IN-LINE FUSE SURGE PROTECTION IN-LINE FUSE & SURGE PROTECTION





Twin panes of glass or acrylic extend from the center decorative metal arm as a special co-extruded remote phosphor LED light source backlights the panes with a beautifully smooth wash of light.

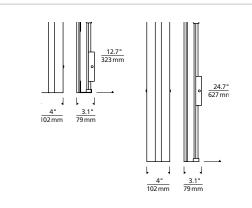

LAMPING

-ir 1': 8 watt, 570 delivered lumen LED module available in 4 CCT and 2 CRI options

2': 16 watt, 1,040 delivered lumen LED module available in 4 CCT and 2 CRI options

SPECIFICATIONS

Mounts horizontally or vertically

700WSWIN	LENGTH	DETAIL	SHADE COLOR	HARDWARE FINISH	LAMP
	1 1' 2 2'	M MODERN DETAIL T WATER DETAIL	K SMOKE GLASS Y WHITE ACRYLIC W WHITE GLASS	Z ANTIQUE BRONZE C CHROME S SATIN NICKEL	-LED824 LED 80 CRI 2400K 120V -LED824-277 LED 80 CRI 2400K 277V -LED835 LED 80 CRI 3500K 120V -LED835-277 LED 80 CRI 3500K 277V -LED840 LED 80 CRI 4000K 277V -LED840-277 LED 80 CRI 4000K 277V -LED930 LED 90 CRI 3000K 120V -LED930-277 LED 90 CRI 3000K 277V




The small nature of the LED source allows the hand-carved glass panel (made from 40% recycled content) to take center stage. The organic pattern of waves across the panels is inspired by the flow of a river.




 700WSMUR
 GLASS COLOR
 HARDWARE FINISH
 LAMP

 GF
 FROST GLASS
 Z ANTIQUE BRONZE
 -LED
 LED 80 CRI 3000K 120V

 GK
 SMOKE GLASS
 S SATIN NICKEL
 -LED277
 LED 80 CRI 3000K 277V

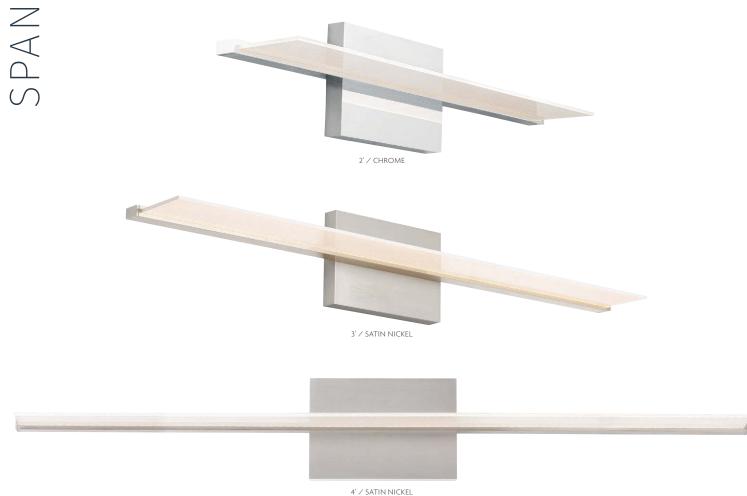

This ultra-thin, modern bath bar is made possible through the use of edge-lit LED light guide technology. What appears to be a simple plate of frosted glass when off, then illuminates across the entire surface as if the light is coming out of thin air.



LAMPING

-i- 2': 26 watt, 1,215 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

3': 39 watt, 1,820 delivered lumen, 3000K LED module $\scriptstyle /$ Dimmable with low-voltage electronic dimmer

4': 52 watt, 2,430 delivered lumen, 3000K LED module $\scriptstyle /$ Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Mounts horizontally or vertically / Direct or Direct / Indirect light distribution options


Complete photometrics available at www.techlighting.com

700BCSPAN	DISTRIBUTION	LENGTH	HARDWARE FINISH	LAMP				
	A DIRECT B DIRECT/INDIRECT	2 2FT 3 3FT	C CHROME S SATIN NICKEL	-LED930 -LED930-277	LED 90 CRI 3000K 120V LED 90 CRI 3000K 277V			
		4 4FT						





The ultimate in modern simplicity, a special co-extruded remote phosphor LED channel is set into the sleek backplate to provide an amazingly slim profile and flawless, even illumination.

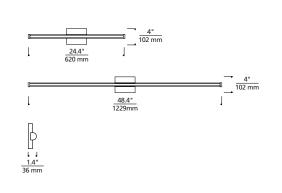

LAMPING

2': 8 watts, 570 delivered lumens or 16 watts, 1040 delivered lumens available in 4 CCT options and 2 CRI options

4': 16 watts, 1,040 delivered lumens or 32 watts, 2,080 delivered lumens available in 4 CCT options and 2 CRI options

SPECIFICATIONS

Mounts horizontally or vertically

ADA ADA Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT


Head / P. 570-571, Linear Suspension / P. 337, Bath / P. 525-527

700BCRAER	OUTPUT	LENGTH	HARDWARE FINISH	LAMP		VOLT	AGE
	3 300 LMS/FT	24 24"	C CHROME	-LED824 LED	80 CRI 2400K		120 VOLT
	6 600 LMS/FT	48 48"	S SATIN NICKEL	-LED835 LED	0 80 CRI 3500K	-277	277 VOLT
				-LED840 LED	80 CRI 4000K		
				-LED930 LED	90 CRI 3000K		





A perfect balance of simplicity and sophistication, a sleek plate of glass floats in front of a special co-extruded remote phosphor LED channel to provide flawless, even illumination.

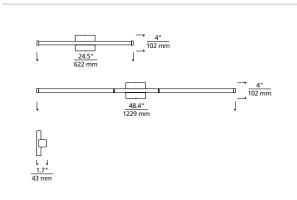

LAMPING

-i- 2': 8 watts, 570 delivered lumens or 16 watts, 1040 delivered lumens available in 4 CCT options and 2 CRI options

4': 16 watts, 1,040 delivered lumens or 32 watts, 2,080 delivered lumens available in 4 CCT options and 2 CRI options

SPECIFICATIONS

Mounts horizontally or vertically

ADA ADA Compliant

COMPLEMENTARY PRODUCT

Linear Suspension / P. 338, Bath / P. 525-527

700BCGIAR	OUTPUT	OUTPUT LENGTH COLOR HARDWARE FINISH		LAMP	VOLTAGE	
	3 300 LMS/FT 6 600 LMS/FT	24 24" 48 48"	C CLEAR K SMOKE	C CHROME S SATIN NICKEL	-LED824 LED 80 CRI 2400K	
	0 000 EIVIS/F1	40 40	K SIVIONE	3 SATININICKEL	-LED840 LED 80 CRI 4000K	
					-LED930 LED 90 CRI 3000K	










37"/ SATIN NICKEL

This sleek fixture is purpose-built to provide a beautifully diffused wash of illumination perfect for vanity applications. Pairing its ultra-slim, full length backplate with its uninterrupted linear diffuser creates a sophisticated, modern aesthetic.



LAMPING

-i 13": 25 watt, 1334 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic dimmer

25": 35 watt, 2210 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic dimmer

37": 46 watt, 3427 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

→ Mounts horizontally or vertically

T24 13" and 25" Title 24 Compliant

700BCSAGW	LENGTH	HARDWARE FINISH	LAMP	
	13 13"	C CHROME	-LED927	LED 90 CRI 2700K 120V
	25 25"	S SATIN NICKEL	-LED927-277	LED 90 CRI 2700K 277V
	37 37"		-LED930	LED 90 CRI 3000K 120V
			-LED930-277	LED 90 CRI 3000K 277V






ANTIQUE BRONZE



Modern minimalist design exudes from this versatile and efficient LED wall sconce. A precisely executed acrylic shade provides an incredibly smooth wash of light as it is intentionally interrupted by negative space in the center of the fixture for visual contrast.

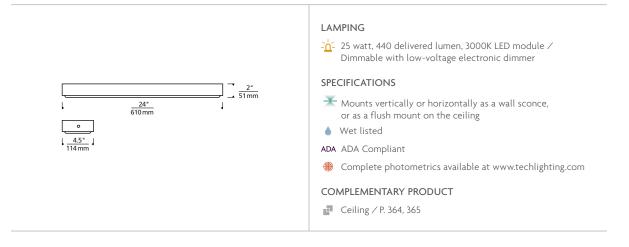

 700WSWNT
 HARDWARE FINISH
 LAMP

 Z
 ANTIQUE BRONZE
 -LED830
 LED 80 CRI 3000K 120V


 S
 SATIN NICKEL
 -LED830-277
 LED 80 CRI 3000K 277V





LARGE / ANTIQUE BRONZE

Modern minimalist design exudes from this versatile and efficient LED fixture. A precisely executed acrylic shade provides an incredibly smooth wash of light as it is intentionally interrupted by negative space in the center of the fixture for visual contrast. Three sizes offer designers the opportunity to address scale in spaces that demand larger solutions.



LAMPING

- Small: 21 watt, 404 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

Medium: 40 watt, 830 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

Large: 60 watt, 1,870 delivered lumen, 3000K LED $\scriptstyle /$ Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

* May be wall or ceiling mounted

Wet listed


ADA ADA Compliant

Complete photometrics available at www.techlighting.com


COMPLEMENTARY PRODUCT

Ceiling / P. 364, 366

700FMWNTS	SIZE		lΑ	RDWARE FINISH	LAMP					
	S SMA M MED L LAR	OIUM S		THE DITTE	-LED830 -LED830-2					K 120V K 277V

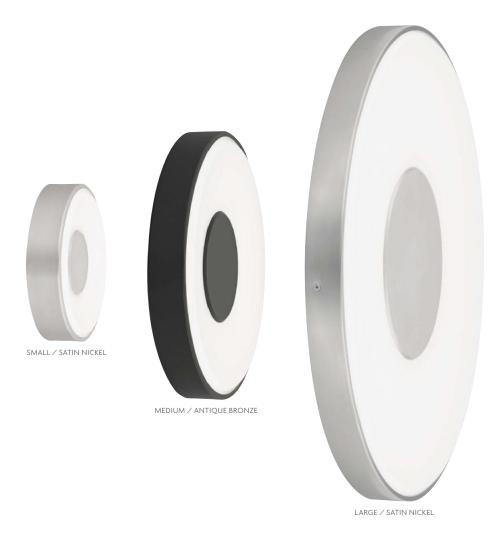

Modern minimalist design exudes from this versatile and efficient LED fixture. A precisely executed acrylic shade provides an incredibly smooth wash of light as it is intentionally interrupted by negative space in the center of the fixture for visual contrast. Three sizes offer designers the opportunity to address scale in spaces that demand larger solutions.



LAMPING

- Small: 21 watt, 404 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

Medium: 40 watt, 830 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

Large: 60 watt, 1,870 delivered lumen, 3000K LED / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

May be wall or ceiling mounted

Wet listed

ADA ADA Compliant

Complete photometrics available at www.techlighting.com


COMPLEMENTARY PRODUCT

Ceiling / P. 365, 366

700FMWNTR	SIZE	HARDWARE FINISH	LAMP				
	S SMALL M MEDIUM L LARGE	Z ANTIQUE BRONZE S SATIN NICKEL	-LED830 LED 80 CRI 3000K 120 -LED830-277 LED 80 CRI 3000K 277				



A beautiful round pressed glass shade with a hand-polished surface is suspended from a die-cast metal base.



LAMPING

Small: 120 volt 40 watt, G9 base halogen lamp / Dimmable with standard incandescent dimmer

Large: (2) 120 volt 40 watt, G9 base halogen lamps \nearrow Dimmable with standard incandescent dimmer

-<u>h</u>- Small: 12 watt, 472 delivered lumen, 2700K, 3000K or 4000K LED module / Dimmable with a low-voltage electronic or triac dimmer

Large: 23 watt, 1143 delivered lumen, 2700K, 3000K or 4000K LED module / Dimmable with a low-voltage electronic or triac dimmer

SPECIFICATIONS

X LED may be mounted on the ceiling or wall

♦ All finishes suitable for wet locations

IP-65 Bronze and Charcoal finishes are IP-65 wet rated

ADA ADA Compliant

Dark Sky Compliant when ceiling mounted

Complete photometrics available at www.techlighting.com

700CQ	SIZE	HARDWARE FINISH*	LAMP
	S SMALL L LARGE	Z ANTIQUE BRONZE H CHARCOAL C CHROME S SATIN NICKEL	INCANDESCENT 120V -LED 270 CRI 2700K 120V LED 90 CRI 2700K 277V LED 30 CRI 3000K 120V LED 3-277







LARGE / CHARCOAL

LARGE / SATIN NICKEL

An ultra-clean, square pressed glass shade with a hand-polished surface is suspended from a die-cast metal base.



LAMPING

Small: 120 volt 40 watt, G9 base halogen lamp / Dimmable with standard incandescent dimmer

Large: (2) 120 volt 40 watt, G9 base halogen lamps / Dimmable with standard incandescent dimmer

-m- Small: 12 watt, 472 delivered lumen, 2700K, 3000K or 4000K LED module / Dimmable with a low-voltage electronic or triac dimmer

Large: 23 watt, 1192 delivered lumen, 2700K, 3000K or 4000K LED module / Dimmable with a low-voltage electronic or triac dimmer

SPECIFICATIONS

igwedge LED may be mounted on the ceiling or wall

♦ All finishes suitable for wet locations

IP-65 Bronze and Charcoal finishes are IP-65 wet rated

ADA ADA Compliant

Dark Sky Compliant when ceiling mounted

Complete photometrics available at www.techlighting.com

700BX	SIZE	HARDWARE FINISH*	LAMP
	S SMALL L LARGE	 Z ANTIQUE BRONZE H CHARCOAL C CHROME S SATIN NICKEL 	-LED INCANDESCENT 120V -LED LED 90 CRI 2700K 120V -LED3 LED 90 CRI 3000K 120V -LED3 LED 90 CRI 3000K 277V -LED4 LED 90 CRI 4000K 277V -LED4 LED 90 CRI 4000K 277V








18"/ CHARCOAL

Soft up light emanates from a high-quality rectilinear acrylic shade to help highlight structural features on architectural facades – indoors or out – while creating subtle, warm ambient way-finding illumination.

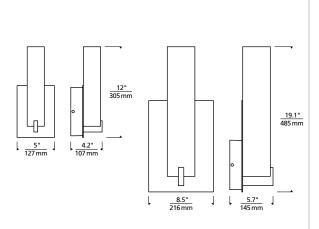

LAMPING

- 12": 120-277 universal voltage 17 watt, 1047 delivered lumen, 3000K or 4000K LED module ∕ Dimmable with low-voltage electronic or 0-10v dimmer

18": 120-277 universal voltage 29 watt, 1994 delivered lumen, 3000K or 4000K LED module / Dimmable with low-voltage electronic or 0-10v dimmer

SPECIFICATIONS

Mounts up only

IP-65 IP65 wet listed for indoor \angle outdoor use

T24 Title 24 Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT


Wall / P. 462

7000WCOS	CRI / CCT	LENGTH	COLOR	FINISH	VOLTAGE	DISTRIBUTION	OPTIO	NS
	830 80 CRI, 3000K 840 80 CRI, 4000K	12 12" 18 18"	Y ACRYLIC	Z BRONZE H CHARCOAL	UNV 120V-277V	S SYMMETRIC	PC LF SP PCLF PCSP	NONE BUTTON PHOTOCONTROL IN-LINE FUSE SURGE PROTECTION BUTTON PHOTOCONTROL & IN-LINE FUSE BUTTON PHOTOCONTROL & SURGE PROTECTION
							LFSP	IN-LINE FUSE & SURGE PROTECTION
TING.COM							PCLFSP	BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION





A selection of rectilinear glass shades are presented on a sleek metal base.



LAMPING



(2) 120 volt 40 watt, mini-candelabra base lamps / Dimmable with standard incandescent dimmer

-i- 10 watt, 580 delivered lumen, 3000K LED module / Dimmable with a low-voltage electronic dimmer

SPECIFICATIONS

Mounts up only

ADA ADA Compliant

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Wall / P. 460, Bath / P. 464, 466


700WSCOS	SHADE COLOR	HARDWARE FINISH	LAMP	
	F FROST WHITE	Z ANTIQUE BRONZE		INCANDESCENT 120V
	Y WHITE ACRYLIC*	C CHROME	-LED	LED 80 CRI 3000K 120V
	W WHITE EDIT	C CATINI NIICVEI	LED277	LED OU CDI SUUN 377V

^{*} WHITE ACRYLIC NOT AVAILABLE WITH INCANDESCENT LAMP





This rectilinear shaped light bar with multi-layered white glass or white acrylic shade cleanly provides task and ambient light.



LAMPING



(4) 120 volt 40 watt, halogen mini-candelabra base lamps / Dimmable with standard incandescent dimmer



-h- 25 watt, 1460 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS



ADA ADA Compliant

T24 Title 24 Compliant

COMPLEMENTARY PRODUCT

■ Wall / P. 462, Bath / P. 466

700BCMET	SHADE COLOR	HARDWARE FINISH	LAMP	
	WHITE GLASS	Z ANTIQUE BRONZE		INCANDESCENT 120V
	Y WHITE ACRYLIC*	C CHROME	-LED927	LED 90 CRI 2700K 120\
		S SATIN NICKEL	-LED927-277	LED 90 CRI 2700K 277\
			-LED930	LED 90 CRI 3000K 120\
			-LED930-277	LED 90 CRI 3000K 277


^{*} WHITE ACRYLIC NOT AVAILABLE WITH INCANDESCENT LAMP





SATIN NICKEL

This rectilinear shaped light bar with a white acrylic shade and pressure formed frame provides task and ambient light.

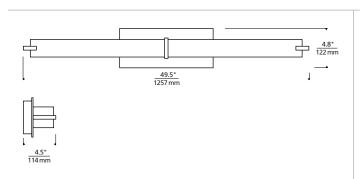

LAMPING

- 45 watt, 2480 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

→ Mounts horizontally or vertically

COMPLEMENTARY PRODUCT

■ Wall / P. 462, Bath / P. 464

700BCMETL	SHADE COLOR	HARDWARE FINISH	LAMP	
	Y WHITE ACRYLIC	C CHROME	-LED927	LED 90 CRI 2700K 120V
		S SATIN NICKEL	-LED927-277	LED 90 CRI 2700K 277V
			-LED930	LED 90 CRI 3000K 120V
			-LED930-277	LED 90 CRI 3000K 277\





A sleek domed acrylic diffusor discreetly softens the LED source while providing great wide-angle light distribution.




 Z
 ANTIQUE BRONZE
 -LED930
 LED 90 CRI 3000K 120V

 5
 SATIN NICKEL
 -LED930-277
 LED 90 CRI 3000K 277V






A sleek domed acrylic diffusor discreetly softens the LED source while providing great wide-angle light distribution, perfect for vanity applications.

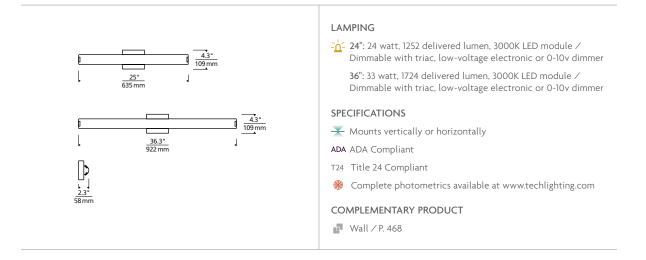


700BCFINN	LENGTH	FINISH	LAMP		
	24 24"	Z ANTIQUE BRONZE	-LED930	LED 90 CRI 3000K 120V	
	36 36"	S SATIN NICKEL	-I FD930-277	LED 90 CRI 3000K 277V	



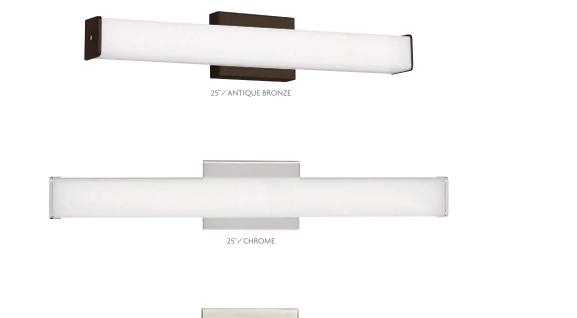

48" / SATIN NICKEL

A sleek linear, fully enclosed glass or acrylic shade is finished with metal end caps and provides task and ambient light.

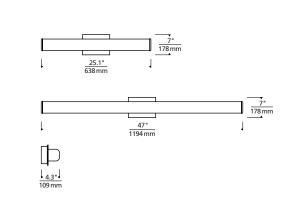

LAMPING



(5) 120 volt 40 watt, G9 base halogen lamps / Dimmable with standard incandescent dimmer/25" Only



<u>-</u>ը- 25": 25 watt, 1460 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

48": 45 watt, 2480 delivered lumen, 2700K or 3000K LED module / Dimmable with low-voltage electronic or triac dimmer

SPECIFICATIONS

Mounts horizontally or vertically

T24 LED 25" Title 24 Compliant

Complete photometrics available at www.techlighting.com


700BCLYNN	LEN	IGTH	SHADE COLOR	Н	ARDWARE FINISH	LAN	ЛΡ	
		25" 48"**	Y WHITE ACRYLIC* W WHITE GLASS	C	ANTIQUE BRONZE CHROME SATIN NICKEL	-LED	927 927-277 930	INCANDESCENT 120V (25* ONLY) LED 90 CRI 2700K 120V LED 90 CRI 2700K 277V LED 90 CRI 3000K 120V LED 90 CRI 3000K 727V

^{*} WHITE ACRYLIC NOT AVAILABLE WITH INCANDESCENT LAMP
** 48" NOT AVAILABLE WITH INCANDESCENT LAMP OR WHITE GLASS





As if floating, this clean frosted glass shade rests on a minimal metal base and provides task and ambient light.

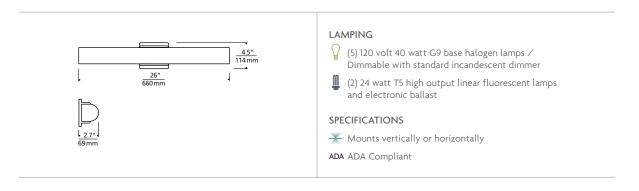

700BCSLC26W HARDWARE FINISH LAMP

Z ANTIQUE BRONZE C CHROME S SATIN NICKEL

-CF -CF277

INCANDESCENT 120V FLUORESCENT 120V FLUORESCENT 277V





14" ANTIQUE BRONZE




14" CHROME



24" SATIN NICKEL

A sleek minimalist profile is created by "fusing" the bath bar with the wall by recessing the entire housing.

A thick plate of highly refined optic acrylic is finely sandblasted on the inside to gently diffuse
the LED light as it pours onto the surrounding surface.



LAMPING

14": 16 watt, 1150 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

24": 32 watt, 2300 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer


SPECIFICATIONS

→ Mounts horizontally or vertically

ADA ADA Compliant


700BCFUSY	LENGTH	HARDWARE FINISH	LAMP
	14 14" 24 24"	Z ANTIQUE BRONZE C CHROME	-LED830 LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V
		S SATIN NICKEL	



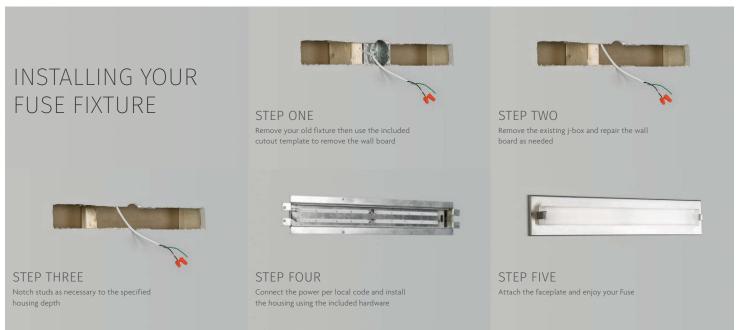



This wide shade is a floating crescent of multi-layered white case glass and provides task and ambient light.



LAMPING

(4) 120 volt 60 watt, mini-candelabra base lamps (included) $\!\!\!\!/$ Dimmable with standard incandescent dimmer

(2) 14 watt T5 linear fluorescent lamps (lamps and electronic ballast included)

SPECIFICATIONS

→ Mounts vertically or horizontally

ADA ADA Compliant

700BCLUN24 HARDWARE FINISH

LAMP

INCANDESCENT

C CHROME S SATIN NICKEL

-CF277 -HL

INCANDESCENT 120V FLUORESCENT 277V HALOGEN 120V








CHROME



SATIN NICKEL

Dual linear acrylic shades providing both task and ambient light are accented by a minimal metal body and sleek metal endcaps.

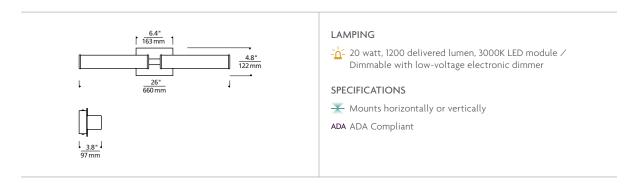

700BCALDY HARDWARE FINISH


- Z ANTIQUE BRONZE C CHROME S SATIN NICKEL

- **-LED830** LED 80 CRI 3000K 120V **-LED830-277** LED 80 CRI 3000K 277V





An elliptical glass shade with metal band detail provides a sleek modern silhouette.



LAMPING

120 volt 60 watt, medium base BT15 halogen lamp / Dimmable with standard incandescent dimmer

-<u>h</u>- 8 watt, 500 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Mounts vertically or horizontally / Incandescent version Mounts vertically only

ADA ADA Compliant

COMPLEMENTARY PRODUCT

■ Bath / P. 482


700WSCRVW HARDWARE FINISH

Z ANTIQUE BRONZES SATIN NICKEL

-LED 80 CRI 3000K 120V



Fully enclosed elliptical glass shade with metal band detail. Provides task and ambient light.

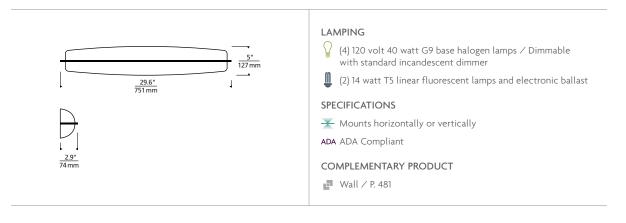

700BCCRV30W HARDWARE FINISH LAMP

C CHROME
S SATIN NICKEL -CF FLUORESCENT 120V
-CF277 FLUORESCENT 277V





SATIN NICKEL WITH GOLD WING NUTS



BRONZE WITH BRONZE WING NUTS




BRONZE WITH GOLD WING NUTS



SATIN NICKEL WITH SATIN NICKEL WING NUTS


Beautiful, hand-carved glass is held in place with a pair of decorative wing-nuts. All fixtures ship with two sets of wing-nuts, one that matches the metal finish of the fixture and one pair in a Gold Finish for a contrasting aesthetic.

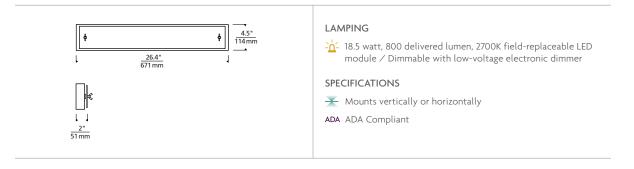

 W WHITE
 Z ANTIQUE BRONZE STAIN NICKEL
 -LED -LED AU CED 80 CRI 2700K 120V -LED 277 LED 80 CRI 2700K 277V



Inspired by the sheen of big city streets and intersections illuminated at night. Composed of raw sheet steel protected with a clear lacquer coat and accented by brass spot welding at the joints, it has a purposefully imperfect, rugged, industrial design.



LAMPING

(2) 120 volt 40 watt, G9 base halogen bi-pin lamps / Dimmable with standard incandescent dimmer

10 watt, 500 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Mounts horizontally only

ADA ADA Compliant


COMPLEMENTARY PRODUCT

Pendant / P. 182, Linear Suspension / P. 322

700WSCRS SHADE FINISH

S STEEL

LAMP

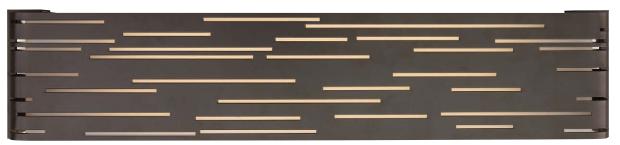

ANTIQUE BRONZE WITH METAL TRIM




SATIN NICKEL WITH WALNUT WOOD TRIM

OPTIONAL END CAP FINISHES



Captures light in motion. The sleek metal surface is laser-cut with several horizontal slots which allow light to shine through the inner white acrylic diffuser. The diffuser wraps around the inner top and bottom to conceal the hardware and lamping when viewed from any angle — above and below or if mounted vertically, both sides. Optional wood end caps complement the design with a touch of warmth in an unexpected way.

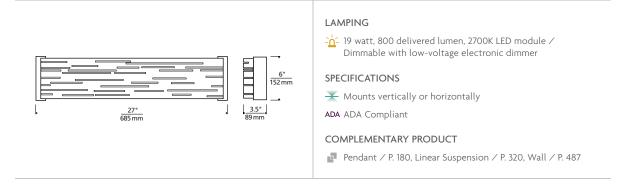

 Z
 ANTIQUE BRONZE S SATIN NICKEL
 M MAPLE WOOD W WALNUT WOOD T MED ALED 80 CRI 2700K 120V W WALNUT WOOD T METAL
 LED 80 CRI 2700K 120V LED 80 CRI 2700K 127V LED 80 CRI 2700K 277V



ANTIQUE BRONZE WITH WALNUT WOOD TRIM



SATIN NICKEL WITH MAPLE WOOD TRIM

OPTIONAL END CAP FINISHES






MAPLE WOOD

WALNUT

Captures light in motion. The sleek metal surface is laser-cut with several horizontal slots which allow light to shine through the inner white acrylic diffuser. The diffuser wraps around the inner top and bottom to conceal the hardware and lamping when viewed from any angle — above and below or if mounted vertically, both sides. Optional wood end caps complement the design with a touch of warmth in an unexpected way.



LAMPING

- 8 watt, 400 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Mounts horizontally or vertically

ADA ADA Compliant

COMPLEMENTARY PRODUCT

Pendant / P. 180, Linear Suspension / P. 320, Wall / P. 486

700WSRVL	SHADE COLOR	TRIM COLOR	LAMP	
	Z ANTIQUE BRONZE S SATIN NICKEL	M MAPLE WOOD W WALNUT WOOD	-LED -LED277	LED 80 CRI 2700K 120V LED 80 CRI 2700K 277V



ANTIQUE BRONZE





SATIN NICKEL

A graceful curve of metal with intricate, asymmetric cutouts. The inner white case glass softens the light shining through this dramatic piece.





LAMPING



-h- 8 watt, 500 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Mounts horizontally only

ADA ADA Compliant

700WSVNT HARDWARE FINISH

Z ANTIQUE BRONZE S SATIN NICKEL

INCANDESCENT 120V -LED LED 80 CRI 2700K 120V





ANTIQUE BRONZE

LED light guide technology allows an ultra-slim profile, while drawing in the curious eye seeking the source of the light. What appears to be a semi-transparent panel of glass when off, then illuminates across the entire surface creating a warm ambient glow.



700WSIST HARDWARE FINISH LAMP


Z ANTIQUE BRONZE Y GRAY
S SATIN NICKEL
W WHITE







Dual tubes of light are suspended by detailed industrial metal brackets in this retro-inspired contemporary bath bar. Available in both glass and acrylic versions.

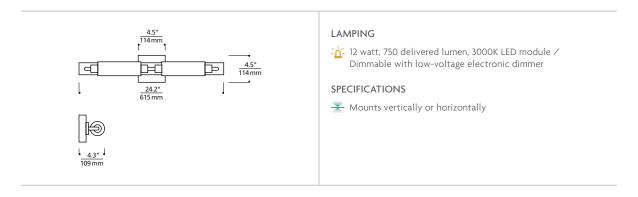

700BCMOR	SHADE COLOR	HARDWARE FINISH	LAMP
	Y CLEAR ACRYLIC	Z ANTIQUE BRONZE	-LED830 LED 80 CRI 3000K 120V
	C CLEAR GLASS	C CHROME	-LED830-277 LED 80 CRI 3000K 277V
		C CATINI NIICKEI	








SATIN NICKEL

Pure indulgence, the Sara is cut from a solid block of crystal and formed into two elegant cylinders which surround hand-blown inner white glass diffusers that sit atop a die-cast metal base. Instantly elevates any space.



LAMPING

(2) 120 volt 60 watt, T10 medium base lamps / Dimmable with standard incandescent dimmer

(2) 18 watt 2GX7 base twin tube compact fluorescent lamps

SPECIFICATIONS

Mounts vertically or horizontally

COMPLEMENTARY PRODUCT

Pendant / P. 196, Wall / P. 494

700WSSARDC HARDWARE FINISH C CHROME S SATIN NICKEL





Pure indulgence, the Sara is cut from a solid block of crystal and formed into an elegant cylinder which surrounds a hand-blown inner white glass diffuser and sits atop a die-cast metal base. Instantly elevates any space.




LAMPING

2 120 volt 60 watt, T10 medium base lamp / Dimmable with standard incandescent dimmer

120 volt 26 watt, GX24Q-3 base triple tube compact fluorescent lamp

COMPLEMENTARY PRODUCT

Pendant / P. 196, Bath / P. 492



700WSSAR SHADE COLOR

HARDWARE FINISH C CLEAR

Z ANTIQUE BRONZE C CHROME S SATIN NICKEL

INCANDESCENT 120V
-CF COMPACT FLUORESCENT 120V



Pure indulgence, the Jayden is cut from a solid block of crystal and formed into an elegant rectangular prism which surrounds a hand-blown inner white glass diffuser and sits atop a die-cast metal base. Instantly elevates any space.



LAMPING




120 volt 60 watt, or equivalent T10 medium base lamp / Dimmable with standard incandescent dimmer

120 volt 26 watt, GX24Q-3 base triple tube compact fluorescent lamp

COMPLEMENTARY PRODUCT

Pendant / P. 198



700WSJDN SHADE COLOR

C CLEAR

HARDWARE FINISH

Z ANTIQUE BRONZE C CHROME S SATIN NICKEL

INCANDESCENT 120V COMPACT FLUORESCENT 120V



The sleek shade has a classic geometric shape made of pressed glass and is presented on a die-cast base.



LAMPING

12 volt 35 watt, halogen bi-pin lamp / Dimmable with standard incandescent dimmer

SPECIFICATIONS

ADA ADA Compliant

COMPLEMENTARY PRODUCT

Pendants / P. 250, 251







700WSCUB SHADE COLOR

HARDWARE FINISH

F FROST


Z ANTIQUE BRONZE C CHROME S SATIN NICKEL





SATIN NICKEL

Slumped transparent glass over an inner acrylic diffuser provides a modern, sophisticated look that is both simple and elegant.

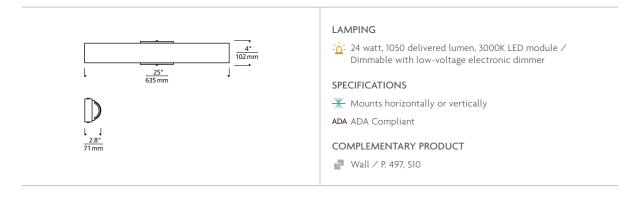


 700BCJXN25
 SHADE COLOR
 HARDWARE FINISH
 LAMP

 C CLEAR
 C CHROME 5 SATIN NICKEL
 -LED830 -LED830-277
 LED 80 CRI 3000K 120V -LED830-277



Turn virtually any Tech Lighting low-voltage FreeJack pendant into a wall sconce.



SPECIFICATIONS

Includes low-voltage electronic transformer. The telescoping arm accommodates any pendant under 7.5" in diameter. Can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included). Dimmable with low-voltage electronic dimmer.

700WSENSU HARDWARE FINISH LAMPING COMPATIBILITY

Z ANTIQUE BRONZE C CHROME S SATIN NICKEL

HALOGEN 120V IN / 12V OUT

-277 HALOGEN 120V IIV 12V OUT
-LED LED 120V IIV 12V OUT
-LED277 LED 277V IN 12V OUT

YOU CAN CHOOSE FROM OVER 100 LOW-VOLTAGE FJ PENDANTS TO COMPLETE YOUR SYSTEM. REFER TO THE PENDANTS SECTION P. 32-255




























THE TELESCOPING ARM STARTS AT A MINIMUM OF 3.5"AND EXTENDS TO A MAXIMUM OF 5.6"





WITH REVEL PENDANT ANTIQUE BRONZE

Turn virtually any Tech Lighting low-voltage FreeJack pendant into a wall sconce. The integrated telescoping arm accommodates any pendant up to 9" in diameter. An Integrated three step touch dimmer makes it perfect for home or hospitality use.



SPECIFICATIONS

Includes low-voltage electronic transformer. Currently only compatible with halogen and xenon pendants, the Ensu (P. 498) can be used with LED pendants. Can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included). Dimmable with low-voltage electronic dimmer.

700WSSNA HARDWARE FINISH

LAMPING COMPATIBILITY

Z ANTIQUE BRONZE S SATIN NICKEL

HALOGEN 120V IN / 12V OUT

YOU CAN CHOOSE FROM OVER 100 LOW-VOLTAGE FJ PENDANTS TO COMPLETE YOUR SYSTEM. REFER TO THE PENDANTS SECTION P. 32-255


















WITH MANETTE PENDANT ANTIQUE BRONZE

THE TELESCOPING ARM STARTS AT A MINIMUM OF 7.6"AND EXTENDS TO A MAXIMUM OF 11.9"





Transform many Tech Lighting Line Voltage pendants into wall sconces.



SPECIFICATIONS

Compatible with Pendants that use Incandescent, Halogen, GU24 Compact Fluorescent and 4-Pin Compact Fluorescent Lamps. When using 4-Pin Compact Fluorescent Lamps, use the ballast that is included with the Pendant. The integrated telescoping arm features a structural crossbar to support larger pendants up to 20 pounds and 20" in diameter. Can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included).

700WSCFT HARDWARE FINISH

LAMPING COMPATABILITY*

Z ANTIQUE BRONZE

INCANDESCENT/HALOGEN 120V CF GU24 BASE 120V

* LEAVE BLANK FOR ALL LAMPING OPTIONS
** WHEN USING CF 4-PIN LAMPS, USE THE BALLAST THAT IS INCLUDED WITH THE PENDANT

YOU CAN CHOOSE FROM DOZENS OF LINE-VOLTAGE PENDANTS TO COMPLETE YOUR SYSTEM. REFER TO THE PENDANTS SECTION P. 32-255




















SATIN NICKEL

This carriage light inspired cylindrical glass shade complements the elegant metal backplate and hand-welded fitter detail.



LAMPING



120 volt 60 watt G9 base, halogen lamp / Dimmable with standard incandescent dimmer



18 watt GX24Q-2 base triple tube lamp and electronic ballast

600BRGW SHADE COLOR

 \mathbf{W} WHITE

HARDWARE FINISH

Z ANTIQUE BRONZEN POLISHED NICKELS SATIN NICKEL

INCANDESCENT 120V
-CF COMPACT FLUORESCENT 120V








POLISHED NICKEL

This nautical-inspired mariner light features a white glass diffuser and classic cage detail with solid metal construction.



LAMPING

120 volt 100 watt medium base A19 lamp / Dimmable with standard incandescent dimmer

-h- 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Wet listed


T24 LED includes Title 24 Compliant lamp

600ADMSW	SHADE COLOR	HARDWARE FINISH	LAMP	
	W WHITE	Z ANTIQUE BRONZEN POLISHED NICKEL		INCANDESCENT 120V A19 LED 90 CRI 2700K 120V





Cylindrical glass shades with a simple metal base provide up- and down light.

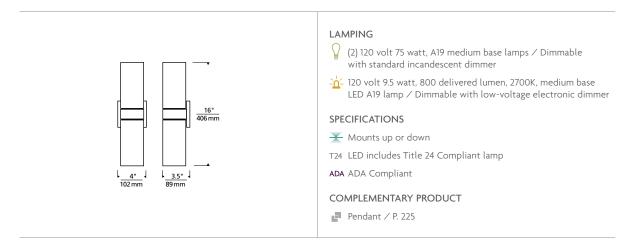

700WSHUD2W HARDWARE FINISH

LAMP

Z ANTIQUE BRONZE C CHROME S SATIN NICKEL


INCANDESCENT 120V -LED927 A19 LED 90 CRI 2700K 120V





ANTIQUE BRONZE, DOWN

This contemporary rectangular glass shade is elevated with a die-cast metal detail.



LAMPING

(2) 120 volt 60 watt, G9 base halogen lamps / Dimmable with standard incandescent dimmer

- 12 watt, 780 delivered lumen, 3000K LED module ∕ Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

Mounts up or down

ADA ADA Compliant

Complete photometrics available at www.techlighting.com

700WSKISWW HARDWARE FINISH


Z ANTIQUE BRONZE C CHROME S SATIN NICKEL

LAMP

-LED830 INCANDESCENT 120V -LED830 LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V



Slumped transparent glass over an inner glass diffuser provides a modern, sophisticated look that is both simple and elegant.

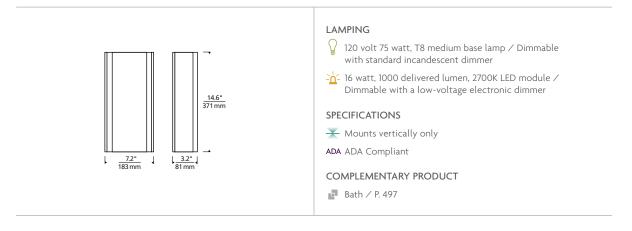

700WSJXN	SHADE COLOR	HARDWARE FINISH	LAMP			
	C CLEAR N HAVANA BROWN K SMOKE U STEEL BLUE	Z ANTIQUE BRONZE S SATIN NICKEL	-LED -LED277	INCANDESCENT 120V LED 80 CRI 2700K 120V LED 80 CRI 2700K 277V		





ANTIQUE BRONZE





WHITE NATURAL SATIN NICKEL SATIN NICKEL

Elegant multi-toned shade is comprised of natural shell panels with die-cast base.

LAMPING

120 volt 60 watt, A19 medium base lamp / Dimmable with standard incandescent dimmer


-ii- 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendant / P. 288



700WSPLA SHADE COLOR

B BROWN N NATURAL W WHITE Z ANTIQUE BRONZE

C CHROME S SATIN NICKEL

HARDWARE FINISH LAMP

INCANDESCENT 120V -LED927 A19 LED 90 CRI 2700K 120V



Elegant multi-toned shade is comprised of natural shell panels with a minimal metal base.

LAMPING

120 volt 75 watt, medium base T8 lamp / Dimmable with standard incandescent dimmer

-h- 16 watt, 1000 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer


SPECIFICATIONS

Mounts vertically only

ADA ADA Compliant

COMPLEMENTARY PRODUCT

Pendant / P. 228



700WSPLAF SHADE COLOR

B BROWN N NATURAL

W WHITE

HARDWARE FINISH Z ANTIQUE BRONZE S WHITE BRONZE

LAMP -LED

INCANDESCENT 120V LED 80 CRI 2700K 120V -LED277 LED 80 CRI 2700K 277V










A vivid glass shade creates layers of light over a white case glass inner cylinder which is suspended from a round base and highlighted with three satin nickel cylinder details.



LAMPING

120 volt 75 watt, A19 medium base lamp / Dimmable with standard incandescent dimmer

-h- 120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

T24 LED includes Title 24 Compliant lamp

COMPLEMENTARY PRODUCT

Pendants / P. 206, 208, 210

700TDECS	SHADE COLOR	HARDWARE FINISH	LAMP
	A AMBER	S SATIN NICKEL	

A AMBER
Q AQUAMARINE
C CLEAR
S SMOKE
U STEEL BLUE

INCANDESCENT 120V
-LED927 A19 LED 90 CRI 2700K 120V





This cone shaped, slumped glass shade is rich with color and pattern.

LAMPING

120 volt 40 watt, G9 bi-pin lamp / Dimmable with standard incandescent dimmer

-i- 8 watt, 500 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer


SPECIFICATIONS

→ Mounts vertically only

ADA ADA Compliant

COMPLEMENTARY PRODUCT

Pendant / P. 253



700WSLRKS SHADE COLOR

A BEACH AMBER W SURF WHITE

HARDWARE FINISH

Z ANTIQUE BRONZE C CHROME S SATIN NICKEL

LAMP

-LED277

INCANDESCENT 120V LED 80 CRI 2700K 120V LED 80 CRI 2700K 277V



This large cone shaped, slumped glass shade is rich with color and pattern.

LAMPING



120 volt 75 watt, T8 medium base lamp / Dimmable with standard incandescent dimmer

-h- 16 watt, 1000 delivered lumen, 2700K LED module / Dimmable with low-voltage electronic dimmer


SPECIFICATIONS

Mounts vertically only

ADA ADA Compliant

COMPLEMENTARY PRODUCT

Pendant / P. 253



700TDLRKS SHADE COLOR

A BEACH AMBER S SAND W SURF WHITE

HARDWARE FINISH Z ANTIQUE BRONZE S SATIN NICKEL

LAMP


INCANDESCENT 120V -LED LED 80 CRI 2700K 120V -LED277 LED 80 CRI 2700K 277V







A dramatic rectangular onyx or glass shade is surrounded by a streamlined metal frame.



LAMPING

Å

120 volt 100 watt, R7S base, 118 mm double-ended halogen lamp ${\rm \diagup}$ Dimmable with standard incandescent dimmer

- 8 watt, 500 delivered lumen, 2700K LED module / Dimmable with a low-voltage electronic dimmer

SPECIFICATIONS


Mounts vertically only

ADA ADA Compliant

700WSCOR	SHADE COLOR	HARDWARE FINISH	LAMP	
	H HONEY ONYX	Z ANTIQUE BRONZE		INCANDESCENT 120V
	W WHITE GLASS	S SATIN NICKEL	-LED	LED 80 CRI 2700K 120V
			-I FD277	LED 80 CRI 2700K 277V



A half-cylinder fabric shade with rolled edges and minimal metal base creates an understated sconce.

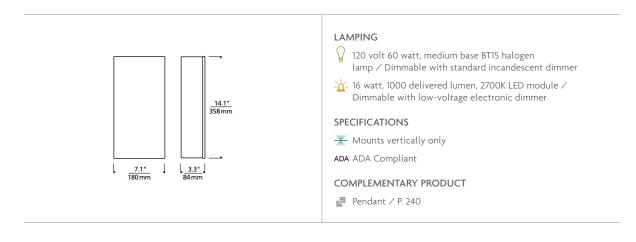

 700WSLEX
 SHADE COLOR
 HARDWARE FINISH
 LAMP


 C
 DESERT CLAY
 Z
 ANTIQUE BRONZE
 INCANDESCENT 120V

 W
 WHITE
 S
 SATIN NICKEL
 -LED
 LED 80 CRI 2700K 120V

 -LED277
 LED 80 CRI 2700K 277V



For total versatality, glass, shell or fabric shade options are mounted with a minimal metal detail.

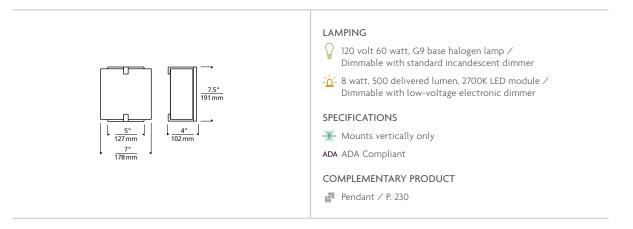


700WSESX	SHADE COL	OR H	ARDWARE FINISH	LAMP	
	GLASS GA BEACH GW SURF V	AMBER C	ANTIQUE BRONZE CHROME SATIN NICKEL	-LED -LED277	INCANDESCENT 120V LED 80 CRI 2700K 120V LED 80 CRI 2700K 277V
	FABRIC FC DESERT				
	SHELL PN NATURAL PW WHITE				





Simple and sophisticated, this tailored modern fabric drum sits atop a sleek die cast aluminum base with white glass diffuser.



LAMPING

120 volt 75 watt, A19 medium base lamp / Dimmable with standard incandescent dimmer

120 volt 9.5 watt, 800 delivered lumen, 2700K, medium base LED A19 lamp / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS


→ Mounts up only

T24 LED includes Title 24 Compliant lamp

700WSCHL	SHADE COLOR	HARDWARE FINISH	LAMP	
	B BLACK Y HEATHER GRAY W WHITE	Z ANTIQUE BRONZE N POLISHED NICKEL S SATIN NICKEL	-LED927	INCANDESCENT 120V A19 LED 90 CRI 2700K 120V



This natural hemp fabric shade features recycled paper backing and recycled sand-cast bronze metal work. The fabric shade and recycled bronze are both sourced locally within 20 miles of our facility. The product also ships in environmentally-friendly recycled packaging.

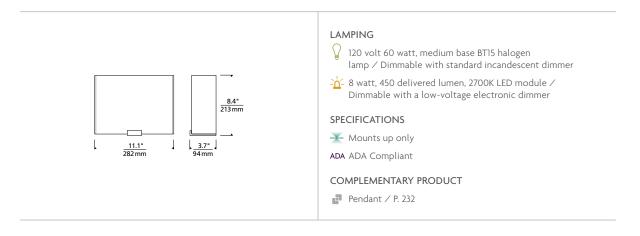


700WSBOR	SHADE COLOR	HARDWARE FINISH*	LAMP	
	I IVORY	Z ANTIQUE BRONZE		INCANDESCENT 120V
		S WHITE BRONZE	-LED	LED 80 CRI 2700K 120V
			-LED277	LED 80 CRI 2700K 277V

WHILE WE FEEL THEY LOOK VERY NICE TOGETHER, THE BOREAL FINISHES WILL NOT SE AN EXACT MATCH TO OTHER TECH LIGHTING ANTIQUE BRONZE HARDWARE





Our Mirror Kits ship with everything needed to create an illuminated vanity and include the following:

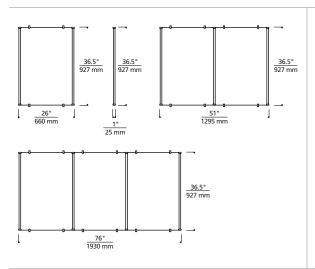

LAMPING

-i Single: 1 Mirror, 2 Light Channels, 1 Power Supply (60 watts) and Mounting Hardware

Double: 2 Mirrors, 3 Light Channels, 1 Power Supply (60 watts) and Mounting Hardware

Triple: 3 Mirrors, 4 Light Channels, 1 (300 lms/ft) or 2 (600 lms/ft) Power Supplies (60 watts each) and Mounting Hardware

SPECIFICATIONS

Mounts vertically only

ADA ADA Compliant

COMPLIMENTARY PRODUCT

Bath / P. 448, 450

A special co-extruded remote phosphor LED channel hugs a high-quality mirror in 3 mirror configurations. The LED channel provides an amazingly slim profile less than 1 inch deep with flawless, even illumination and great color reproduction.


LAMPING

-ir Comes complete with 3.9 watts/ft of LEDs to create 300 lms/ft; or 7.8 watts/ft of LEDs to create 600 lms/ft available in 4 CCT options and 2 CRI options

SPECIFICATIONS

ADA ADA Compliant

700BCRAEMRR	OUTPUT	TYPE	HARDWARE FINISH	LAMP	VOLTAGE
	3 300 LMS/FT 6 600 LMS/FT	S SINGLE D DOUBLE T TRIPLE	C CHROME S SATIN NICKEL	-LED824 LED 80 (-LED835 LED 80 (-LED840 LED 80 (-LED930 LED 90 (CRI 3500K -277 277 VOLT CRI 4000K

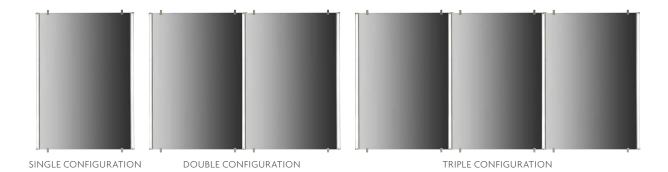

A sleek plate of glass floats in front of a special co-extruded remote phosphor LED channel which hugs a high-quality mirror in 3 configurations. The LED channel provides an amazingly slim profile less than 1 inch deep with flawless, even illumination and great color reproduction.

LAMPING



-i- Comes complete with 3.9 watts/ft of LEDs to create 300 lms/ft; or 7.8 watts/ft of LEDs to create 600 lms/ft available in 4 CCT options and 2 CRI options.


SPECIFICATIONS

ADA ADA Compliant

700BCGIAMRR	OUTPUT	TYPE	GLASS COLOR	HARDWARE FINISH	LAMP		VOL	TAGE
	3 300 LMS/FT	S SINGLE	C CLEAR	C CHROME	-LED824	LED 80 CRI 2400K		120 VOLT
	6 600 LMS/FT	D DOUBLE	K SMOKE	S SATIN NICKEL	-LED835	LED 80 CRI 3500K	-277	277 VOLT
		T TRIPLE			-LED840	LED 80 CRI 4000K		
					-LED930	LED 90 CRI 3000K		



Our Vanity Kits ship with everything needed to create an illuminated vanity and include the following:

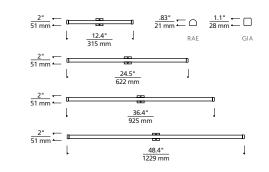

LAMPING

-id- Easily illuminate virtually any mirror to create a custom lit vanity for the ultimate in flexibility.

SPECIFICATIONS

Each vanity kit includes the specified length of Light Channel, Mounting Hardware and 2" Custom J-Box and Canopy. The power supply is sold separately and requires remote location for mounting. Mounts horizontally or vertically. The Gia versions additionally ship with the specified glass and glass brackets.

ADA ADA Compliant









A special co-extruded remote phosphor LED channel is designed to adapt to virtually any mirror to create a truly custom lit vanity. The LED Channel provides an amazingly slim profile less than 1 inch deep with flawless, even illumination and great color reproduction.

LAMPING

∸d-Comes complete with 3.9 watt/ft of LEDs to create 300 lms/ft; or 7.8 watts/ft of LEDs to create 600 lms/ft available in 4 CCToptions and 2 CRI options

SPECIFICATIONS

ADA ADA Compliant

X Each unit ships complete with a 2" square / 3" deep J-Box and requires a remote mounted transformer (sold separately). Transformer size based on total number of Vanity Kits powered on the transformer

700BCRAEVKTR	OUTPUT	J-BOX TYPE	LENGTH	HARDWARE FINISH	LAMP	
	3 300 LMS/FT	02 2" CANOPY	12 12"	C CHROME	-LED824	LED 80 CRI 2400K
	6 600 LMS/FT		24 24"	S SATIN NICKEL	-LED835	LED 80 CRI 3500K
			36 36"		-LED840	LED 80 CRI 4000K
			48 48"		-LED930	LED 90 CRI 3000K

REMOTE POWER SUPPLY

700AT	WATTAGE	TYPE	INPUT VOLTAGE		
	060 60 WATTS	EL LOW-VOLTAGE ELECTRONIC	120 VOLT		



A sleek plate of glass floats in front of a special co-extruded remote phosphor LED channel which is designed to adapt to virtually any mirror to create a truly custom lit vanity. The LED Channel provides an amazingly slim profile with flawless, even illumination and great color reproduction. A sleek plate of glass floats in front of a special co-extruded remote phosphor LED channel hugs a high-quality mirror in 3 configurations. The LED channel provides an amazingly slim profile less than 1 inch deep with flawless, even illumination and great color reproduction.

LAMPING

-id- Comes complete with 3.9 watt/ft of LEDs to create 300 lms/ft; or 7.8 watts/ft of LEDs to create 600 lms/ft available in 4 CCT options and 2 CRI options

SPECIFICATIONS

ADA ADA Compliant

Each unit ships complete with a 2" square/3" deep J-Box and requires a remote mounted transformer (sold separately). Transformer size based on total number of Vanity Kits powered on the transformer

02 2" CANOPY	12 12" 24 24"	C CLEAR K SMOKE	C CHROME S SATIN		LED 80 CRI 2400K
	36 36"	T SMOKE	NICKEL	-LED840	LED 80 CRI 4000K
	UZ Z CANOPT	24 24"	24 24" K SMOKE 36 36"	24 24" K SMOKE 5 SATIN 36 36" NICKEL	24 24" K SMOKE S SATIN -LED835 36 36" NICKEL -LED840

REMOTE POWER SUPPLY

700AT	WATTAGE		TYPE	VOLTAGE
	000	60 WATTS	EL LOW-VOLTAGE ELECTRONIC	120 VOLT






RECESSED

SURFACE

This rectangular mirror surrounded by a cove of diffused white light is available in two styles: recessed and surface and provides shadow-free task and ambient light. Recessed version requires modifications to existing wall construction.

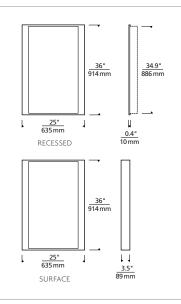

LAMPING

Å

(8) 120 volt 40 watt, G9 base halogen lamps $\scriptstyle /$ Dimmable with standard incandescent dimmer

(2) 39 watt T5 high output linear fluorescent lamps and electronic ballast / Not dimmable

-n-(8) 5 watt, 400 delivered lumen (3200 total delivered lumens), 3000K, LED modules / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

ADA ADA Compliant

700BCSIB	STYLE	HARDWARE FINISH	LAMP	
	R RECESSED	C CHROME		HALOGEN
	S SURFACE	S SATIN NICKEL	-CF	FLUORESCENT 120V
			-CF277	FLUORESCENT 277V
			-LED930	LED 90 CRI 3000K 120V
			-LED930-277	LED 90 CRI 3000K 277V





Rectangular mirror with imbedded sidelights, behind frosted glass, provides task lighting.


LAMPING

(2) 24 watt mini bi-pin base T5HO lamps and electronic ballast $\scriptstyle /$ Not dimmable

-h- (2) 20 watt, 1100 delivered lumen (2200 total delivered lumens), 3000K LED modules / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

ADA ADA Compliant



700VNRFL LAMP

FLUORESCENT 120V -LED830 LED 80 CRI 3000K 120V -LED830-277 LED 80 CRI 3000K 277V



Oval mirror surrounded by a cove of diffused white light. Available in recessed or surface. Provides shadowfree task and ambient light. Mirror swings open for easy relamping. Recessed version requires wall construction.

LAMPING



(8) 120 volt 40 watt, G9 base halogen lamps / Dimmable with standard incandescent dimmer




(6) 9 watt 2G7 base twin tube lamps and electronic ballast $\scriptstyle /$ Not dimmable



-i- (9) 4 watt, 100 delivered lumen (900 total delivered lumens), 3000K LED modules / Dimmable with low-voltage electronic dimmer

SPECIFICATIONS

ADA ADA Compliant

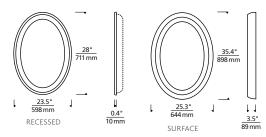

700BCTIGO STYLE

R24 RECESSED S26 SURFACE

C CHROME S SATIN NICKEL

HARDWARE FINISH LAMP

-CF

-CF277 -LED930 -LED930-277 LED 90 CRI 3000K 277V


HALOGEN
COMPACT FLUORESCENT 120V (SURFACE ONLY) COMPACT FLUORESCENT 277V (SURFACE ONLY) LED 90 CRI 3000K 120V





This round mirror is surrounded by a cove of diffused white light. Available in two styles: recessed and surface.

Plated pressure formed frame. Provides shadow-free task and ambient light. Mirror swings open
for easy relamping. Recessed version requires modifications to existing wall construction.

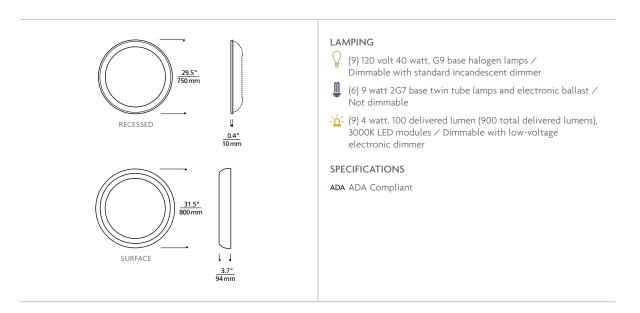

700BCTIGR	STYL	.E	H	ARDWARE FINISH	LAMP				
	R30			CHROME		HALOGEN			
	S32	S32 SURFACE		SATIN NICKEL	-CF	COMPACT FLUORESCENT 120V (SURFACE ONLY)			
					-CF277	COMPACT FLUORESCENT 277V (SURFACE ONLY)			
					-LED930	LED 90 CRI 3000K 120V			
					-LED930-277	LED 90 CRI 3000K 277V)			












This LED line-voltage wall wash head features a unique clamshell design for optimal vertical light distribution with adjustable horizontal cutoff control ranging from 2° to 120°. The smoothly diffused light is ideal for commercial applications such as accent, retail, or display where a well-defined wall wash effect is desired.

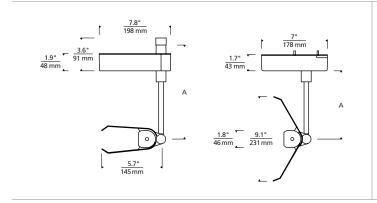

LINE-VOLTAGE

Low Output: 15 watt, 1000 delivered lumen, 3000K or 4000K LED module

High Output: 25 watt, 1500 delivered lumen, 3000K or 4000K LED module

SPECIFICATIONS

→ Mounts to PowerJack or T-TRAK only


2° - 120° Adjustable Vertical Beam Distribution / 160° Vertical Pivot / 360° Rotation

700	SYST	EM I	HEL	LA	MP	CI	RI	CC	Т	STI	EM LENGTH (A)	FII	VISH
	PJ TT	POWERJACK* SINGLE-CIRCUIT T~TRAI	K	_	LOW OUTPUT HIGH OUTPUT	9	90 CRI		3000K 4000K		-	_	SATIN NICKEL WHITE

^{*} SHIPS WITH POWERJACK CANOPY



A simple, tool-free, one-handed turn of the outer ring continuously adjusts beam spread from 20° to 50° to avoid the restriction of factory-set optics. Additionally, a locking mechanism with indicator markings ensures precision adjustment of multiple fixtures allowing consistency of fixtures throughout an environment.

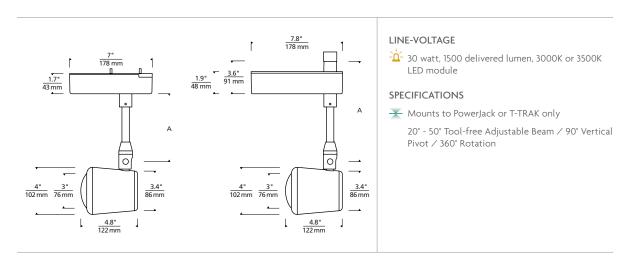

700	SYSTEM		FKS	C	RI	CC	CCT		EM LENGTH (A)	FINISH	
	PJ	POWERJACK*		9	90 CRI	30	3000K	06	6"	S	SATIN NICKEL
	TT	SINGLE-CIRCUIT	T~TRAK			35	3500K	12	12"	W	WHITE

^{*} SHIPS WITH POWERJACK CANOPY



This unique fixture integrates the latest LED light guide technology with the versatility of Kable Lite. Each panel head pivots 360° making it ideal for direct and indirect general illumination, wall wash and display applications. When used in conjunction with other low-voltage heads and pendants for Kable Lite, the K-Lev offers incredible flexibility to layer light throughout a space.



LOW-VOLTAGE

-h- Low-voltage 12 watt, 753 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS


Mounts to Kable Lite only

Complete photometrics available at www.techlighting.com

700KLLEV	LENGTH	CABLE SEPARATION	FINISH	LAMP	
	12 12"	05 5 5"	S SATINI NIICKEI	-I ED830	80 CRI 3000K LED 120V



This unique fixture integrates the latest LED light guide technology with the versatility of MonoRail. Each panel head pivots 360° and can be mounted up or down, making it ideal for direct and indirect general illumination, wall wash and display applications. When used in conjunction with other low-voltage heads and pendants, the Lev offers incredible flexibility to layer light throughout a space.



LOW-VOLTAGE

Low-voltage 12 watt, 753 delivered lumen, 3000K LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

Mounts to MonoRail, Two-Circuit MonoRail or Wall MonoRail only

Complete photometrics available at www.techlighting.com

700	SYSTE	EM LEV	STEM LENGTH (A)	FI	NISH	LAMP	
		MONORAIL TWO-CIRCUIT MONORAIL	03 3.3" 06 6.3"	S	SATIN NICKEL	-LED830	80 CRI 3000K LED
	WMO	WALL MONORAIL*	12 12.3"				

^{* 12.3&}quot; STEM LENGTH NOT AVAILABLE ON WALL MONORAIL



This ultra-slim head features field-changeable optics and an optional decorative glass collar. The latest advances in technology deliver an extremely powerful LED head without the bulk typically needed to conceal a driver and manage thermal performance.



LOW-VOLTAGE

Low-voltage 7 watt, 855 delivered lumen, 2700K or 3000K, field replaceable LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

As a general rule when using the Brim head, we do not recommend using greater than 33% of the maximum wattage specified for the $\,$ low-voltage transformer due to inrush current requirements. For assistance in calculations, please contact Technical Support

SPECIFICATIONS



→ Mounts to FreeJack, Monopoint, MonoRail or Two-Circuit MonoRail only

Choice of 20°, 30° or 40° field changeable optics \angle Integrated lens holder accommodates up to 2 lenses or louvers (sold separately)

Complete photometrics available at www.techlighting.com

70	O SYSTEM		EM	BRM	LAMP		BEAM SPREAD	STEM LENGTH (A)	RING COLOR	LAMP	
		FJ	FREEJACK		927	90 CRI 2700K LED	20 20°	05 4.8"	C CLEAR	B MATTE BLACK	**
		MP	MONOPOINT*		930	90 CRI 3000K LED	30 30	08 7.8"	K TRANSPARENT SMOKE	S SATIN NICKEL	
		MO	MONORAII				40 40	14 13.8"			

^{*} INCLUDES 4" ROUND FLUSH CANOPY
** STEM ALWAYS SATIN NICKEL FINISH

MO2 TWO-CIRCUIT MONORAIL





This simple design inspired by telephoto camera lenses utilizes a powerful LED source harnessed by field changeable optics for precision beam control. Multiple CRI and CCT options make this head highly effective in both residential and commercial applications.



LOW-VOLTAGE

Cow-voltage 12 watt, 740 delivered lumen, 2700K, 3000K or 3500K, field replaceable LED module / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

As a general rule when using the Burk head, we do not recommend using greater than 33% of the maximum wattage specified for the low-voltage transformer due to inrush current requirements. For assistance in calculations, please contact Technical Support

SPECIFICATIONS

Mounts to FreeJack, Monopoint, MonoRail or Two-Circuit MonoRail only

Choice of 20° or 35° field changeable optics / Integrated lens holder accommodates up to two MR16 sized lenses or louvers (sold separately)

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Pendants / P. 60, 62, Linear Suspension / P. 318, Wall / P. 403

700 SY	STEM BRK	LAMP	BEAM SPREAD	STEM LENGTH (A)	FINISH
FJ MI M		830 80 CRI 835 80 CRI 927 90 CRI 930 90 CRI	2700K LED 20 20° 3000K LED 35 35° 3500K LED 2700K LED 3500K LED 3500K LED 3500K LED	03 3" 06 6" 12 12"	METAL Z ANTIQUE BRONZE / ANTIQUE BRONZE B BLACK / SATIN NICKEL S SATIN NICKEL / SATIN NICKEL WHITE / SATIN NICKEL
* INCLUDES	t" ROUND FLUSH CANOPY				WOODGRAIN NZ BROWN CHESTNUT / ANTIQUE BRONZE NS BROWN CHESTNUT / SATIN NICKEL YZ WEATHERED GRAY OAK / ANTIQUE BRON. YS WEATHERED GRAY OAK / SATIN NICKEL AZ WHITE ASH / ANTIQUE BRONZ





Simple geometries converge in this modern head that has been specifically designed to employ the SORAA® LED MR16 lamp and to celebrate its design characteristics.



LOW-VOLTAGE



Standard halogen MR16 lamps, 50 watt max / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)



-a- Compatible with SORAA® LED MR16, 50 watt max (See P. 658 for LED MR16 lamping options)

SPECIFICATIONS



→ Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS


Bell, Belladonna, Cone, Cone Onyx, Prism, Round or Soda Glass Shield, or Tinkerbell with Integrated Louver Lens Holder (Sold separately, P. 588-593)

700	SYSTE	м ROT	STEM LENGTH (A)	F	INISH
	FJ	FREEJACK	03 3"	S	SATIN NICKEL
	MP	MONOPOINT*	06 6"		
	MO	MONORAIL	12 12"		
	MO2	TWO-CIRCUIT MONORAIL	18 18"		
	WMO	WALL MONORAIL			

^{*} INCLUDES 4" ROUND FLUSH CANOPY



Inspired by advanced aerodynamics, this sleek LED head features a die-cast aluminum tail which also serves as its heat sink. The head rotates 360°, pivots 210° and is available in two beam spreads, 25° or 40°.



LOW-VOLTAGE

10 watt, 510 delivered lumen, 3000K, 80 CRI LED module / Dimmable to 10%, dimmer type determined by low-voltage transformer

SPECIFICATIONS

Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

25° or 40° field changeable optics


Complete photometrics available at www.techlighting.com

700	SYSTEM ST		「L LAMP			BEAM SPREAD	STEM LENGTH (A)	F	FINISH		
	FJ	FREEJACK	8	30	80 CRI 3000K LED	25 25°	04 4.5"	S	SATIN NICKEL		
	MP	MONOPOINT*				40 40°	12 12"				
	MO	MONORAIL					18 18"				
	MO2	TWO-CIRCUIT MONORA	IL								
	WMO	WALL MONORAIL**									

^{*} INCLUDES 4" ROUND FLUSH CANOPY
** MAXIMUM LENGTH FOR WALL MONORAIL IS 4.5"



Constructed of die cast aluminum, the patented IBISS heads are designed to celebrate what's achievable with LED resulting in a form that would never be possible with traditional lamping. Going beyond simply incorporating LED, the IBISS heads are beautiful in their minimalist simplicity and deliver ultimate performance.

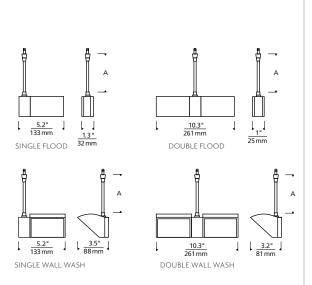

LOW-VOLTAGE

Single / Double: 15/27 watt, 640/1200 delivered lumen, 2700K or 3000K, 80 CRI LED module(s) / Dimmable to 10%, dimmer type determined by low-voltage transformer

As a general rule when using the IBISS head, we do not recommend using greater than 33% of the maximum wattage specified for the low voltage transformer due to inrush current requirements. For assistance in calculations, please contact our Technical Support Department.

SPECIFICATIONS

Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

Pivots vertically 330°, rotates horizontally 360°. Each LED module pivots independently on the double version. Available as FLOOD or Asymmetric WALL WASH. An embedded lens helps diffuse glare and minimize shadowing while maintaining a high degree of efficiency. Flood or wall wash options

Complete photometrics available at www.techlighting.com





SINGLE FLOOD EDGE LIT SINGLE FLOOD SOLID

700	SYSTE	M IBIS	FOF	RM	S	TYLE	LAMP	STEM LENGTH (A)	FI	NISH
	FJ	FREEJACK	FE	FLOOD EDGE LIT	S	SINGLE (10W)	L2 LED 2700K	03 3"	Z	ANTIQUE BRONZE
	MP	MONOPOINT*	FS	FLOOD SOLID	D	DOUBLE (20W)	L3 LED 3000K	06 6"	S	SATIN NICKEL
	MO	MONORAIL	WV	/ WALL WASH				12 12"		
	MO2	TWO-CIRCUIT MONORAL	L					18 18"		
	WMO	WALL MONORAIL**								

^{*} INCLUDES 4" ROUND FLUSH CANOPY

^{**} FOR SINGLE HEAD, USE UP TO 12" MAXIMUM LENGTH, AND FOR DOUBLE HEAD USE UP TO 6" MAXIMUM LENGTH. NOT RECOMMENDED FOR SINGLE WALL WASH
*** INCLUDES CANOPY POWER CONSUMPTION

^{***} INCLUDES CANOPY POWER CONSUMPTI





Simple, industrial-inspired head puts light where you need it. Machined aluminum and brass housings create crisp edges. Head rotates 360°; pivots 90° to direct the beam.

LOW-VOLTAGE



Low-voltage, MR16 lamp of up to 50 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

See P. 658 for LED MR16 lamping options

SPECIFICATIONS



Mounts to FreeJack, Monopoint, MonoRail or Two-Circuit MonoRail only

COMPATIBLE OPTICAL CONTROLS

Integrated lens holder accommodates up to two MR16-size Glass Lenses or Eggcrate Louvers (sold separately, P. 593)



** ACCESSORY SOLD SEPARATELY

700	SYSTEM		TLM	STEM LENGTH (A)		NISH
	FJ	FREEJACK		03 3"	Z	ANTIQUE BRONZI
	MP	MONOPOINT*		06 6"	S	SATIN NICKEL
	MO	MONORAIL		12 12"		
	MO2	TWO-CIRCUIT MON	IORAII	18 18"		

^{*} INCLUDES 4" ROUND FLUSH CANOPY



Precision lines of the heat sink peek through the sleek outer housing creating a look that speaks to its functional performance. The head rotates 360° and pivots 90° to direct the beam.

LOW-VOLTAGE



-<u>h</u>- 16 watt, 780 delivered lumen, 3000K, 80 CRI LED module \nearrow Dimmable to 10%, dimmer type determined by low-voltage transformer

As a general rule when using the ISO head, we do not recommend using greater than 33% of the maximum wattage specified for the low voltage transformer due to inrush current requirements. For assistance in calculations, please contact our Technical Support Department.

SPECIFICATIONS



Mounts to FreeJack, Monopoint, MonoRail or Two-Circuit MonoRail only

20°, 30° or 50° field changeable optics



700	SYST	EM	ISO	LAM	P	BEAM SPREAD	STEM LENGTH (A)	FINISH	LAM	PTYPE
	FJ	FREEJACK		827	80 CRI 2700K LED	20 20°	03 3"	S SATIN NICKEL	-LED	LED
	MP	MONOPOINT*		830	80 CRI 3000K LED	30 30°	06 6"	W WHITE		
	MO	MONORAIL		930	90 CRI 3000K LED	50 50°	12 12"			
	MO2	TWO-CIRCUIT MONO	DRAIL				18 18"			

^{*} INCLUDES 4" ROUND FLUSH CANOPY





WITH SODA GLASS SHIELD**

Dozens of design possibilities. Accessories in myriad styles and colors allow you to create the ideal custom element (accessory required; sold separately). Aero's head rotates 360°, pivots 260° to direct the beam. Removable glass handle.

LOW-VOLTAGE



Low-voltage, MR16 lamp of up to 50 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)



See P. 658 for LED MR16 lamping options

SPECIFICATIONS



Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

ACCESSORY REQUIRED

Bell, Belladonna, Cone, Cone Onyx, Prism, Round or Soda Glass Shield (sold separately, P. 588-593)

** ACCESSORY SOLD SEPARATELY

700) SYSTI	EM A	LE ST	STEM LENGTH (A)		FINISH		
	FJ	FREEJACK	3	3"	7	ANTIQUE BRONZE		
	MP	MONOPOINT*	6	6"	9	SATIN NICKEL		
	MO	MONORAIL	12	2 12"				
	MO2	TWO-CIRCUIT MONORA	AIL 18	3 18"				
	WMC	WALL MONORAIL	24	! 24"				

*INCLUDES 4" ROUND FLUSH CANOPY





Flexible minimalist head with multiple accessory options; rotates 360°, pivots 90°.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 50 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

See P. 658 for LED MR16 lamping options

SPECIFICATIONS



Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only


ACCESSORY REQUIRED

Bell, Belladonna, Cone, Cone Onyx, Prism, Round, Tinkerbell with Integrated Lens Holder or Soda Glass Shield (sold separately, P. 588-593)

700	SYSTE	m TL	T st	STEM LENGTH (A)		FINISH		
	FJ	FREEJACK		2"		ANTIQUE BRONZE		
	MP	MONOPOINT*	06	6"	S	SATIN NICKEL		
	MO	MONORAIL	12	12"				
	MO2	TWO-CIRCUIT MONORA	IL 18	18"				
	WMO	WALL MONORAIL						

^{*} INCLUDES 4" ROUND FLUSH CANOPY



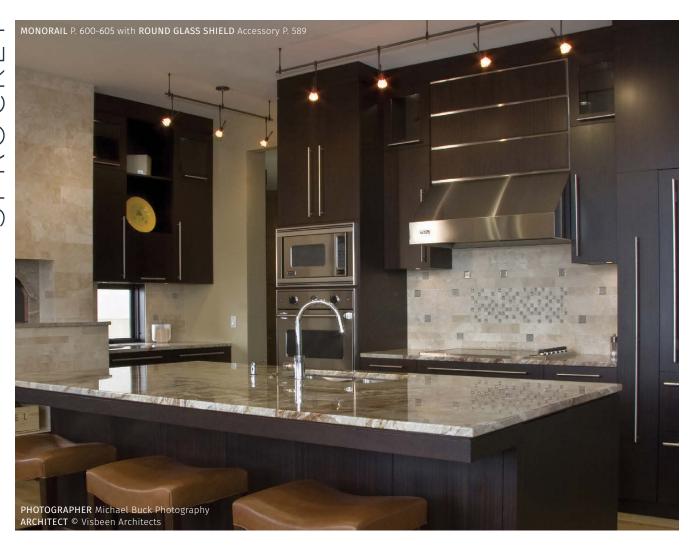

Sleek Sprocket, with its removable handle, has many accessory options Head rotates 360° and pivots 260° on vertical axis.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

See P. 658 for LED MR16 lamping options

SPECIFICATIONS


Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Eggcrate Louver, Flight Paper, Glass Lens, MR16 Snoot (sold separately, P. 588-593)



700	SYSTEM S		SP	STEM LENGTH (A)		FINISH		
	FJ	FREEJACK		1	1.2"	Z	ANTIQUE BRONZE	
	MP	MONOPOINT*		3	3"	S	SATIN NICKEL	
	MO	MONORAIL		6	6"			
	MO2	TWO-CIRCUIT MONO	RAIL	12	12"			
	WMO	WALL MONORAIL		18	18"			
				24	24"			

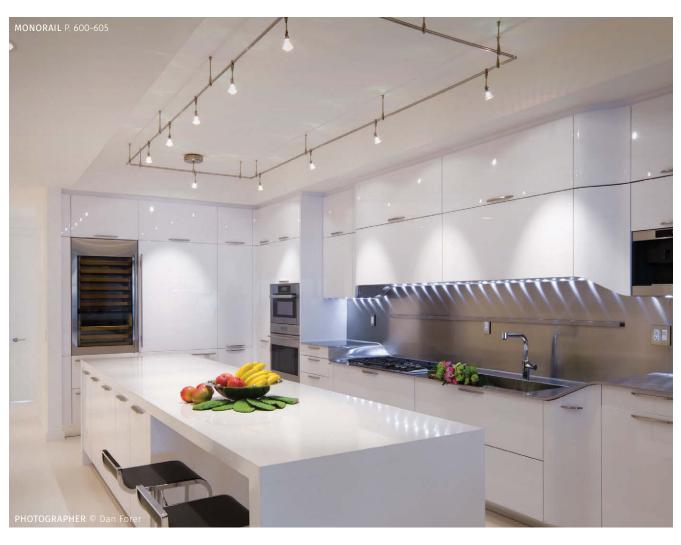

This flexible minimalist head has multiple accessory options; rotates 360°, pivots 90°.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 50 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

See P. 658 for LED MR16 lamping options

SPECIFICATIONS

Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only


ACCESSORY REQUIRED

Bell, Belladonna, Cone, Cone Onyx, Prism, Round or Soda Glass Shield (sold separately, P. 588-593)

70	00 sys	STEM	TLT	STEM LENGTH (A)		FINISH		
	FJ	FREEJACK		2"		Z	ANTIQUE BRONZE	
	MP	MONOPOINT*		06 6"		S	SATIN NICKEL	
	MC	MONORAIL		12 12"				
	MC	2 TWO-CIRCUIT N	10NORAIL	18 18"				
	WN	O WALL MONORA	Ш					



Adjustable head tilts and rotates infinitely.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 50 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

See P. 658 for LED MR16 lamping options

SPECIFICATIONS



Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

COMPATIBLE OPTICAL CONTROLS

Integral louver lens holder can hold a single Glass Lens (sold separately, P. 593) or an Eggcrate Louver (included)

700) SYST	SYSTEM		STEM LENGTH (A)		FINISH		
	FJ	FREEJACK		03 3"	Z	ANTIQUE BRONZE		
	MP	MONOPOINT*		06 6"	C	CHROME**		
	MO	MONORAIL		12 12"	S	SATIN NICKEL		
	MO2	TWO-CIRCUIT MON	IORAIL	18 18"				
	WMC	WALL MONORAL		24 74"				

^{*} INCLUDES 4" ROUND FLUSH CANOPY
** CHROME NOT AVAILABLE ON MONORAIL, TWO-CIRCUIT MONORAIL OR WALL MONORAIL





Adjustable double head tilts and rotates infinitely.



LOW-VOLTAGE

(2) low-voltage MR16 lamps of up to 35 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

See P. 658 for LED MR16 lamping options

SPECIFICATIONS

Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only


COMPATIBLE OPTICAL CONTROLS

Integral louver lens holders can hold a single Glass Lens (sold separately, P. 593) or an Eggcrate Louver (two included)

700	SYSTEM		ELT	STEM LENGTH (A)		FINISH		
	FJ	FREEJACK		03 3"	Z	ANTIQUE BRONZE		
	MP	MONOPOINT*		06 6"	C	CHROME**		
	MO	MONORAIL		12 12"	S	SATIN NICKEL		
	MO2	TWO-CIRCUIT MONO	RAIL	18 18"				
	WMO	WALL MONORAL		24 24"				

^{*} INCLUDES 4" ROUND FLUSH CANOPY
** CHROME NOT AVAILABLE ON MONORAIL, TWO-CIRCUIT MONORAIL OR WALL MONORAIL



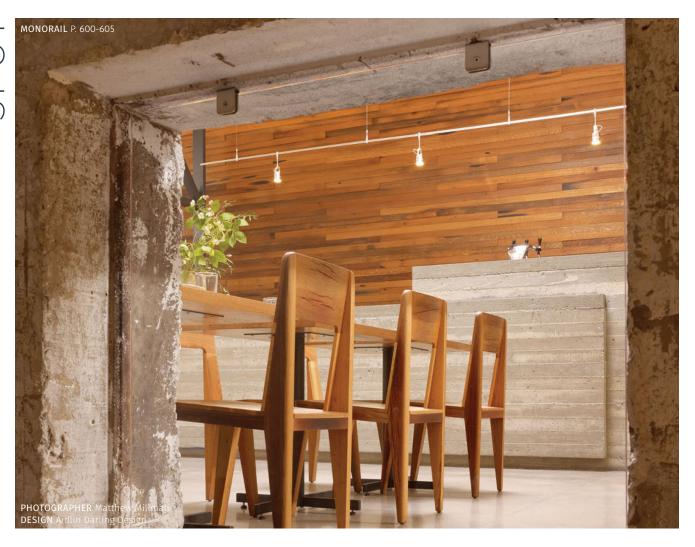

Classic head rotates 360° around stem, pivots 290°.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 50 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)


See P. 658 for LED MR16 lamping options

SPECIFICATIONS

Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

COMPATIBLE OPTICAL CONTROLS

Can hold one Glass Lens or Eggcrate Louver (sold separately, P. 593



700	SYSTEM		SPT6	STEM LENGTH (A)	A) FINISH			
	FJ	FREEJACK		04 4.5"	5	SATIN NICKEL		
	MP	MONOPOINT*		06 6"				
	MO	MONORAIL		12 12"				
	MO2	TWO-CIRCUIT M	ONORAIL	18 18"				
	WMO	WALL MONORAL	L					



Minimal stylish head rotates 360° and pivots 180°.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 50 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

See P. 658 for LED MR16 lamping options

SPECIFICATIONS

Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

COMPATIBLE OPTICAL CONTROLS

Glass Lens (sold separately, P. 593 or Eggcrate Louver (included)



700	SYSTEM		ST	STEM LENGTH (A)		FINISH	
	FJ	FREEJACK	04	l 6"	S	SATIN NICKEL	
	MP	MONOPOINT*	06	6"			
	MO	MONORAIL	12	12"			
	MO2	TWO-CIRCUIT MONORAIL	18	3 18"			
	WMO	WALL MONORAIL	24	1 24"			

^{*} INCLUDES 4" ROUND FLUSH CANOPY



Clean modern European-inspired head with a plated or matte painted finish. Head rotates 360°, pivots 180° to direct the beam.



LOW-VOLTAGE



Low-voltage, MR16 lamp of up to 50 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)



See P. 658 for LED MR16 lamping options

SPECIFICATIONS



Mounts to FreeJack, Monopoint, MonoRail or Two-Circuit MonoRail only

COMPATIBLE OPTICAL CONTROLS

Includes Snap Louver Lens Holder to hold a single Glass Lens or Eggcrate Louver (sold separately, P. 593)

700	SYSTEM		TEM SCAN ST		BODY COLOR	COLOR FINISH		
		FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT N	MONORAIL	03 3" 06 6" 12 12"	L LINEN M METAL	S	SATIN NICKEL	

^{*} INCLUDES 4" ROUND FLUSH CANOPY





Flexible, clean head rotates 360°; pivots 260° to direct the beam.



LOW-VOLTAGE



Low-voltage, MR16 lamp of up to 50 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)



- See P. 658 for LED MR16 lamping options

SPECIFICATIONS



→ Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

COMPATIBLE OPTICAL CONTROLS

Glass Lens or Eggcrate Louver accessory required (sold separately, P. 593)

** ACCESSORY SOLD SEPARATELY

700 SYSTEM OM STEM LENGTH (A) **03** 3" **06** 6" Z ANTIQUE BRONZE S SATIN NICKEL FREEJACK MONOPOINT* MO MONORAIL
MO2 TWO-CIRCUIT MONORAIL
WMO WALL MONORAIL **12** 12" **18** 18"

MINI OM ACCESSORY

Metal backlight shield with built in colored glass, onyx or solid metal ring. Includes Snap Louver Lens Holder. Can hold a single lens or louver. MR16 lamp of up to 50 watts (not included).











FINISH Z ANTIQUE BRONZE S SATIN NICKEL

^{*} INCLUDES 4" ROUND FLUSH CANOPY





WITH EGGCRATE LOUVER**

The LED module is easily field-replaceable with the screw-in base specifically designed for this head. The heat sink remains with the fixture minimizing any waste at the end of the lamp module life. Head rotates 360° and pivots 260° to direct the beam. Accessories in myriad styles allow you to create the ideal custom LED fixture (accessories required; sold separately).



LAMPING

-h- 6 watt, 350 delivered lumen, 3000K, 85 CRI LED module / Dimmable to 10%, dimmer type determined by low-voltage transformer

SPECIFICATIONS

Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

25° or 40° field changeable optics


Complete photometrics available at www.techlighting.com

** ACCESSORY SOLD SEPARATELY

700	SYSTE	EM	HEL	BEAM SPREAD	STEM LENGTH (A)	FINISH	LAMP TYPE
		FREEJACK MONOPOINT* MONORAIL TWO-CIRCUIT MO WALL MONORAIL	NORAIL	25 25° 40 40°	03 3" 06 6" 12 12" 18 18" 24 24"	Z ANTIQUE BRONZE S SATIN NICKEL	-LED LED

^{*} INCLUDES 4" ROUND FLUSH CANOPY.



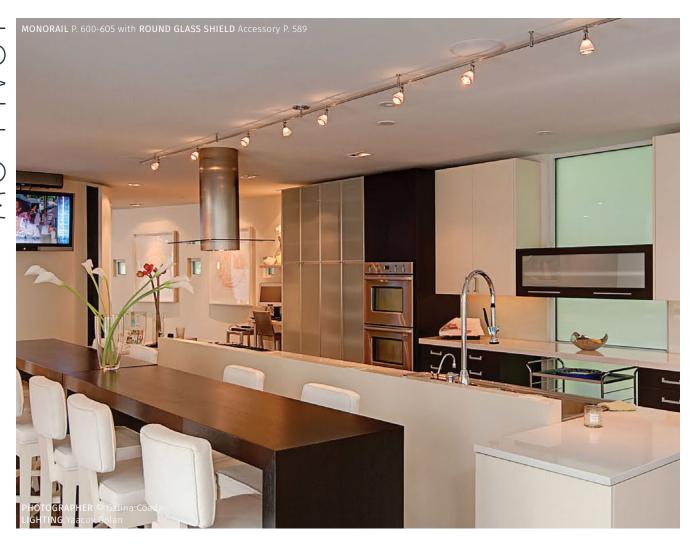

Directs the beam right where you want it. Head swivels 220°, pivots on vertical and horizontal axes.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- See P. 658 for LED MR16 lamping options

SPECIFICATIONS

→ Mounts to MonoRail only

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Glass Lens, MR16 Snoot, Round Glass Shield (sold separately, P. 588-593)



** ACCESSORY SOLD SEPARATELY

700MOPIV FINISH

Z ANTIQUE BRONZE S SATIN NICKEL



Tele telescopes from 9" to 25" to bring the light right where you need it.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

See P. 658 for LED MR16 lamping options

SPECIFICATIONS

Mounts to FreeJack, Monopoint, MonoRail, Two-Circuit MonoRail or Wall MonoRail only

Head rotates 360°, swivels 130° at the bracket and the lamp rotates 290°

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Glass Lens, MR16 Snoot, Round Glass Shield (sold separately, P. 588-593)



** ACCESSORY SOLD SEPARATELY

700 SYSTEM

TEL FINISH

FREEJACK

MP MONOPOINT*
MO MONORAIL
MO2 TWO-CIRCUIT MONORAIL
WMO WALL MONORAIL**

C CHROME S SATIN NICKEL

Z ANTIQUE BRONZE



More than just a head, this unique fixture integrates the uncompromising light quality of remote phosphor LED technology with the versatility of Kable Lite. Each head pivots 360° making it ideal for general illumination, wall wash and display applications. Combine with other heads to incorporate additional layers of light.



LOW-VOLTAGE

- 8 watts/ft, 570 delivered lumens/ft. / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

→ Mounts to Kable Lite only

COMPLEMENTARY PRODUCT

Linear Suspension / P. 337, Bath / P. 448 , 525-527

700KLRAER L	LAM	P	FEATURE LENGTH (A)	CABLE SEPARATION	FI	NISH	LAN	1P TYPE
-		80 CRI 2400K LED 80 CRI 3500K LED	05 5.5" PERPENDICULAR 12 12" PARALLEL	05 5.5"	S	SATIN NICKEL	-LED	LED
-		80 CRI 4000K LED 90 CRI 3000K LED	24 24" PARALLEL					

ROTATES 360° FOR USE IN ANY INTERIOR APPLICATION. FACE DOWN FOR GENERAL ILLUMINATION, DISPLAY AND WALL WASHING.







FACE UP FOR INDIRECT LIGHT AND TO ILLUMINATE VAULTED CEILINGS.










More than just a head, this unique fixture integrates the uncompromising light quality of remote phosphor LED technology with the versatility of MonoRail. Each head pivots 180° and can be mounted up or down making it ideal for general illumination, wall wash and display applications. Combine with other heads to incorporate additional layers of light.



LOW-VOLTAGE

- ' 8 watts/ft, 570 delivered lumens/ft. / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS

→ Mounts to MonoRail or Two-Circuit MonoRail only

© Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Linear Suspension / P. 337, Bath / P. 448

700	SYSTEM	RAER	LAN	IP	LENGTH (A)	FI	NISH	LAM	PTYPE
	MO MONORAIL MO2 TWO-CIRCU	T MONORAIL	835	80 CRI 2400K LED 80 CRI 3500K LED 80 CRI 4000K LED	12 12" 24 24"		ANTIQUE BRONZE SATIN NICKEL	-LED	LED
			930	90 CRI 3000K LED					

MOUNTS UP WHILE MAINTAINING 180° PIVOT MAKING IT IDEAL FOR INDIRECT LIGHT OR ILLUMINATING VAULTED CEILINGS.







MOUNTS DOWN WHILE MAINTAINING 180° PIVOT MAKING IT IDEAL FOR GENERAL ILLUMINATION, DISPLAY AND WALL WASHING.









Highly adjustable head tilts between cables and rotates 140° within its ring. Integral louver lens holder can hold glass lens (sold separately) or eggcrate louver (included).



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 50 watts or AR111 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- See P. 658 for LED MR16 lamping options

SPECIFICATIONS

Mounts to Kable Lite only

COMPATIBLE OPTICAL CONTROLS


Glass Lens or MR16 Snoot (sold separately, P. 593)




** ACCESSORY SOLD SEPARATELY

700KHELLO TYPE / CABLE SEPARATION (A)

- 3 MR16/3.5" 5 MR16/5.5" 6 AR111/5.5"

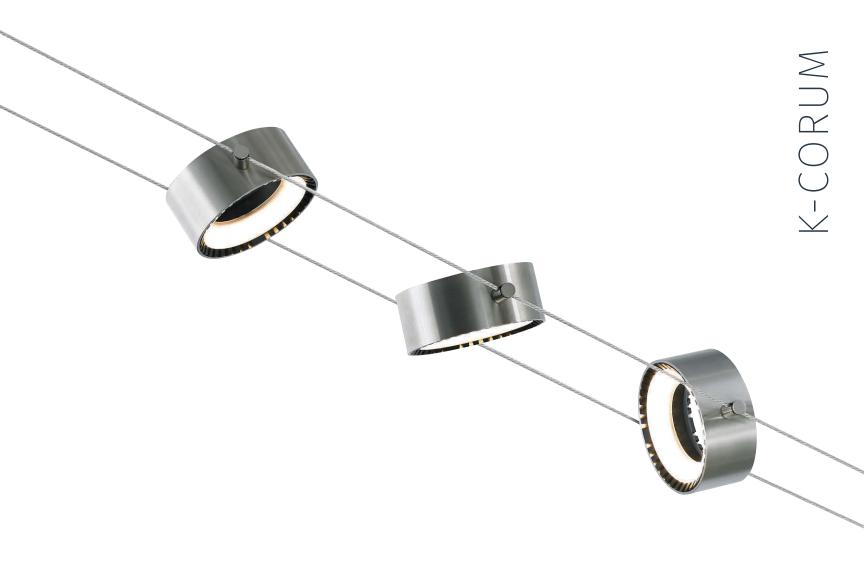

Intriguing design with a focus on high performance, this unique LED head, specially designed for 5.5" Kable Lite separation, is defined by its open center, thin metal frame and exposed geometrical heat sink. The head rotates 360° making it ideal for direct or indirect illumination.



LOW-VOLTAGE

5 watt, 265 delivered lumen, 3000K LED / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

SPECIFICATIONS


→ Mounts to Kable Lite only

Complete photometrics available at www.techlighting.com

COMPLEMENTARY PRODUCT

Pendant P. 172

700KCRM	LAM	P	FI	NISH	LA	LAMPTYPE	
	830	80 CBI 3000K 1 ED	S	SATINI NIICKEI	-LE	D LED	

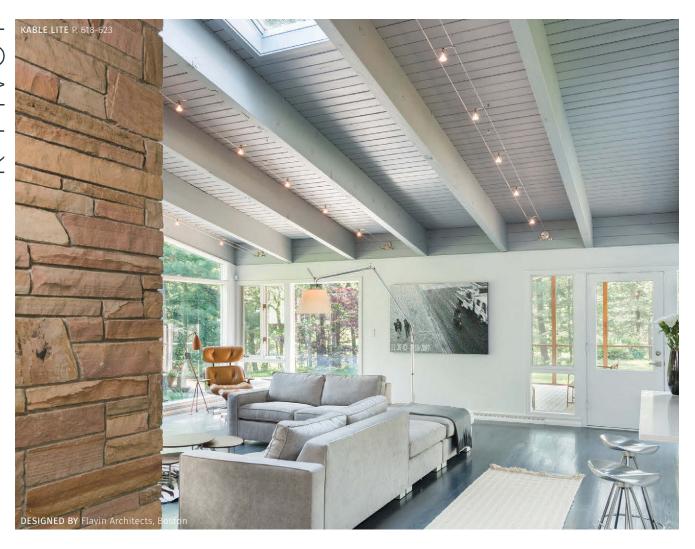

Head swivels 220°, 2" to 8" versions pivot on horizontal axis, 1" version pivots on vertical axis only.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)


- See P. 658 for LED MR16 lamping options

SPECIFICATIONS

Mounts to Kable Lite only

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Glass Lens, MR16 Snoot, Round Glass Shield (sold separately, P. 588-593)



700KPIV	CARLE SEPARATION (A)

FINISH C CHROME S SATIN NICKEL

01 1" 02 2" 03 3.5" 05 5.5" 08 8"

** ACCESSORY SOLD SEPARATELY



Adjustable arms rotate individually. For cable separations of 3.5" to 8". Lamp rotates 360° .



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

See P. 658 for LED MR16 lamping options Not compatible with SORAA® LED MR16

SPECIFICATIONS

→ Mounts to Kable Lite only


COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Louver Lens Holder or Round Glass Shield (sold separately, P. 588-593)



** ACCESSORY SOLD SEPARATELY

700KBYENC

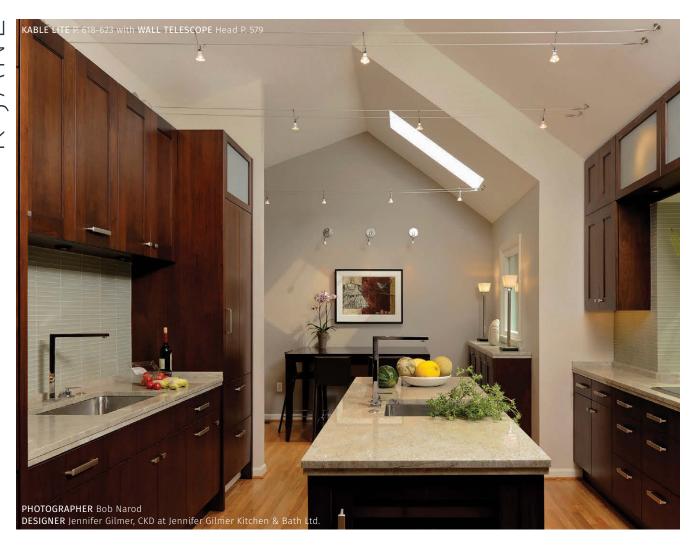

K-Jane drops below the cables; head pivots 220° on two axes.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- See P. 658 for LED MR16 lamping options

SPECIFICATIONS

→ Mounts to Kable Lite only

For cable separations of up to twice the length / Field-cuttable

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Glass Lens, MR16 Snoot, Round Glass Shield (sold separately, P. 588-593)



700KJAN STEM LENGTH (A)


FINISH

05 5" 12 12" 24 24" 36 36"

C CHROME S SATIN NICKEL



Arms telescope individually from 12-42", creating unlimited angles. For cable separations of 1" to 48". Head rotates 330° and has swivel and pivot action to direct the beam.



LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

See P. 658 for LED MR16 lamping options

SPECIFICATIONS

→ Mounts to Kable Lite only

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Glass Lens, MR16 Snoot, Round Glass Shield (sold separately, P. 588-593)

** ACCESSORY SOLD SEPARATELY

700KTEL16 FINISH

C CHROME S SATIN NICKEL



Clamps to Wall MonoRail. 17" long with a 11" high swooping curve. Pivots at head to direct beam.

LOW-VOLTAGE



Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)


- See P. 658 for LED MR16 lamping options

SPECIFICATIONS

Mounts to Wall MonoRail only

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Glass Lens, MR16 Snoot, Round Glass Shield (sold separately, P. 588-593)



700WMARCH FINISH

- Z ANTIQUE BRONZE S SATIN NICKEL



Clamps to Wall MonoRail. 18" long with 3" high gentle curve. Pivots at head to direct beam.

LOW-VOLTAGE



Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)



- See P. 658 for LED MR16 lamping options


SPECIFICATIONS



Mounts to Wall MonoRail only

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Glass Lens, MR16 Snoot, Round Glass Shield (sold separately, P. 588-593)



700WMGRG FINISH

- Z ANTIQUE BRONZE
- S SATIN NICKEL



Clamps to Wall MonoRail. Telescopes from 9" to 25". Pivots at head to direct beam.

LOW-VOLTAGE

Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)


- See P. 658 for LED MR16 lamping options

SPECIFICATIONS

Mounts to Wall MonoRail only

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Glass Lens, MR16 Snoot, Round Glass Shield (sold separately, P. 588-593)



** ACCESSORY SOLD SEPARATELY

700WMTEL FINISH

- Z ANTIQUE BRONZE S SATIN NICKEL



Clamps to Wall MonoRail. Available in two lengths.

Pivots at head to direct beam.

LOW-VOLTAGE



Low-voltage, MR16 lamp of up to 75 watts / Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer)

- See P. 658 for LED MR16 lamping options

SPECIFICATIONS



Mounts to Wall MonoRail only

COMPATIBLE ACCESSORIES & OPTICAL CONTROLS

Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Glass Lens, MR16 Snoot, Round Glass Shield (sold separately, P. 588-593)



** ACCESSORY SOLD SEPARATELY


700WMWAL STEM LENGTH (A)

12 12" **24** 24"

Z ANTIQUE BRONZE S SATIN NICKEL



Die cast aluminum LED head, pivots vertically 90°, rotates horizontally 360°. Features horizontal locking mechanisms. Front air intake design allows airflow past internal heat sink fins to rear exit vents while conserving a clean, thoughtful and seamless form. Three interchangeable optics: 15°, 25° and 40°. Holds up to two PAR16 / MR16 lenses or louvers, sold separately.



LINE-VOLTAGE

-ir Field-replaceable 19 watt, 1,200 delivered lumen LED module

SPECIFICATIONS

→ Mounts to PowerJack or T-TRAK only

LED module and optics are modular for ease of replacement. 19 watt isolated power supply sits within head to avoid further visual impact on track; dimmable digital logic controller operated in constant current mode

Complete photometrics available at www.techlighting.com


700	SYST	EM ENVL	TYPE	ВІ	EAM SPREAD	ST	EM LENGTH (A)	FI	NISH
	PJ	POWERJACK	L2 LED 2700K	1	15°	06	6"	S	SATIN NICKEL
	TT	SINGLE-CIRCUIT T~TRAK	L3 LED 3000K	2	25°	12	12"	W	WHITE
			15 LED 3500K	- 1	40°	12	18"		

^{*} TO MOUNT THIS HEAD ON HALO, JUNO OR LIGHTOLIER TRACK, SEE P. 304 HOLDS UP TO TWO ACCESSORIES, SOLD SEPARATELY: EGGCRATE LOUVER, GLASS LENS, OR UV FILTER (P. 593)





Versatile die cast aluminum head, pivots vertically 180°, rotates horizontally 350°. Features vertical and horizontal locking mechanisms and decorative lens ring.

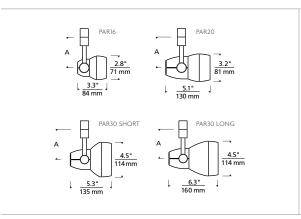

LINE-VOLTAGE

PAR16: 120 volt, GU10 base, up to 50 watts

PAR20: 120 volt, E26 medium base, up to 50 watts

PAR30: 120 volt, E26 medium base, up to 75 watts

SPECIFICATIONS


→ Mounts to PowerJack or T-TRAK only Holds up to (2) lenses or louvers (sold separately)

700	SYST	TEM OM	TYP	E	STEM LENGTH (A)	LENS RING	FINISH
	PJ TT	POWERJACK SINGLE-CIRCUIT T~TRAK	16 20	PAR16 PAR20	03 3" 06 6"	S SOLID	S SATIN NICKEL W WHITE
				PAR30 LONG	12 12"		

^{*} TO MOUNT THIS HEAD ON HALO, JUNO OR LIGHTOLIER TRACK, SEE P. 304 HOLDS UP TO TWO ACCESSORIES, SOLD SEPARATELY: EGGCRATE LOUVER, GLASS LENS, OR UV FILTER (P. 593)



Minimal head pivots vertically 180°, rotates horizontally 350°. Features horizontal locking mechanism.

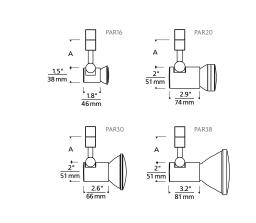

LINE-VOLTAGE

PAR16: 120 volt, GU10 base, up to 50 watts / Dimmable with a standard incandescent dimmer

PAR20: 120 volt, E26 medium base, up to 50 watts / Dimmable with a standard incandescent dimmer

PAR30: 120 volt, E26 medium base, up to 75 watts / Dimmable with a standard incandescent dimmer

PAR38: 120 volt, E26 medium base, up to 120 watts $\scriptstyle /$ Dimmable with a standard incandescent dimmer

SPECIFICATIONS

→ Mounts to PowerJack or T-TRAK only

May be accessorized with PAR Louver Lens Holder (sold separately)

700	SYSTEM		TWS TYPE		STEM LENGTH (A)	FINISH		
	PJ TT	POWERJACK SINGLE-CIRCUIT	T~TRAK	16 PAR16 20 PAR20	03 2.5" 06 6"	S SATIN NICKEL W WHITE		
				30 PAR30 38 PAR38	12 12"			

PAR LOUVER LENS HOLDER


PAR16 size holds one lens or louver; PAR20, PAR30, PAR38 sizes hold up to two lenses or louvers (P. 593). Order separately.



700PARLL	TYPE	FINISH
	16 PAR16	S SATIN NICKE
	20 PAR20	W WHITE
	30 PAR30	
	20 DAD20	



Minimal, stylish head, pivots vertically 180°, rotates horizontally 350°. Features vertical and horizontal locking mechanisms.

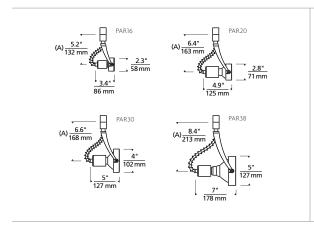

LINE-VOLTAGE

PAR16: 120 volt, GU10 base, up to 50 watts

PAR20: 120 volt, E26 medium base, up to 50 watts

PAR30: 120 volt, E26 medium base, up to 75 watts

PAR38: 120 volt, E26 medium base, up to 120 watts

SPECIFICATIONS

→ Mounts to PowerJack or T-TRAK only


700	SYSTEM		SS TYPE		STEM LENGTH (A)	FINISH
	PJ	POWERJACK		16 PAR16	08 SEE LINE ART	S SATIN NICKEL
	TT	SINGLE-CIRCU	IIT T~TRAK	20 PAR20	12 11.1"	W WHITE
				30 PAR30		
				38 PAR38		

^{*} TO MOUNT THIS HEAD ON HALO, JUNO OR LIGHTOLIER TRACK, SEE P. 304





Classic die cast aluminum head, pivots vertically 180°, rotates horizontally 350°. Features vertical and horizontal locking mechanisms.



LINE-VOLTAGE

PAR20: 120 volt, E26 medium base, up to 50 watts PAR30: 120 volt, E26 medium base, up to 75 watts

SPECIFICATIONS

Mounts to PowerJack or T-TRAK only Holds up to (2) lenses or louvers (sold separately)

700	O SYSTEM		SPT	TYPE		STEM LENGTH (A)		FINISH	
	PJ	POWERJACK SINGLE-CIRCUIT	T TDAV	20	PAR20 PAR30 SHORT	08 SEE LINE ART 12 11.1"	_	SATIN NICKEL	

HOLDS UP TO TWO ACCESSORIES, SOLD SEPARATELY: EGGCRATE LOUVER, GLASS LENS, OR UV FILTER (P. 593)





Helps to cover gaps created by miscut holes in ceiling drywall. 5.5" in diameter. Works with all low-voltage and line-voltage Tech Lighting canopies that are less than 5.5" in diameter.

700CNPGR FINISH

S SATIN NICKEL



Industrial-inspired sloped ceiling adapter. For use with fixtures that utilize rigid stems. 45° maximum slope. Not compatible with fixtures that hang from cable.

600HNGST FINISH


- B ANTIQUE BRASS
- ANTIQUE BRONZE SATIN NICKEL
- INCANDESCENT -CF COMPACT FLUORESCENT


LINE-VOLTAGE

Use to change pendant's point of suspension to any point on the ceiling. Order one for each pendant.

Low-Voltage Swag Hook: Use with FreeJack Pendants

Line-Voltage Swag Hook: Use with Pendants that hang from a single cord





LOW-VOLTAGE

700FJSWG FINISH

Z ANTIQUE BRONZE S SATIN NICKEL

LINE-VOLTAGE

700TDSWG FINISH

Z ANTIQUE BRONZE S SATIN NICKEL W WHITE

589



Colorful translucent round glass. Integrated Louver Lens Holder in aluminum or antique bronze. Can hold up to two lenses or louvers. MR16 of up to 50 watts. Available for use on Aero, DJ-Archie, DJ-Telescope, DJ-Wally Lite, Helios*, Joshua Ceiling, K-Bye-Bye, K-Jane, K-Pivot, K-Telescope, MO-Pivot, Roto, Tele, Tilt, Torpedo Pendant, Wall Telescope (sold separately).



700MR16G COLOR

FINISH

A AMBER
B COBALT
F FROST

ALUMINUM **Z** ANTIQUE BRONZE



Colored frosted cone glass. Includes optional cone louver lens holder. Can hold up to two lenses or louvers. MR16 of up to 50 watts. Available for use on Aero, DJ-Archie, DJ-Telescope, DJ-Wally Lite, Helios*, Joshua Ceiling, K-Jane, K-Pivot, K-Telescope, MO-Pivot, Roto, Tele, Tilt, Torpedo Pendant, Wall Telescope (sold separately).

AM AMBER FROST



Natural onyx cone. Includes optional Snap Louver Lens Holder. Can hold one lens or louver. Low-voltage MR16 lamp of up to 50 watts. Available for use on Aero, Helios*, Roto, Tilt, Torpedo Pendant (sold separately).



700LICOHX





Cone shaped glass shade infused with bubbles. Includes Snap Louver Lens Holder. Can hold a single lens or louver. MR16 of up to 50 watts. Available for use on Aero, Tilt, Helios*, Roto, Torpedo Pendant (sold separately).



700SDA COLOR

A AMBER F FROST

Z ANTIQUE BRONZES SATIN NICKEL

<u>∐</u> (§) TILT P. 552

Ribbed glass. Includes Snap Louver Lens Holder. Can hold a single lens or louver. MR16 of up to 50 watts. Available for use on Aero, Helios*, Roto, Tilt, Torpedo Pendant (sold separately).



700PRISM COLOR CS CLEAR





Small Metal Shade with integral Louver Lens Holder. Can hold up to two lenses or louvers. Antique bronze, MR16 of up to 35 watts. Satin Nickel MR16 of up to 50 watts. Available for use on Aero, Helios*, Roto, Tilt, Torpedo Pendant (sold separately).

700TNKBELLV COLOR

ANTIQUE BRONZE SATIN NICKEL



SHOWS LAMP TYPE AND MAXIMUM WATTAGE



INCLUDES A LOUVER LENS HOLDER



INCLUDES A SNAP LOUVER LENS HOLDER



Large bell-shaped metal shade with plated finish.
Includes Eggcrate Louver. MR16 of up to 50 watts.
Available for use on Aero, Helios*, Roto, Tilt, Torpedo Pendant (sold separately).



700BELL COLOR

BZ ANTIQUE BRONZE SN SATIN NICKEL



Bell-shaped metal shade with plated or painted finish. Includes Eggcrate Louver. MR16 of up to 35 watts. Available for use on Aero, Helios*, Roto, Tilt, Torpedo Pendant (sold separately).



700AERBELL COLOR

BZ ANTIQUE BRONZE SN SATIN NICKEL



Decorative shade of white heat-resistant paper. MR16 of up to 50 watts. Available for use on CP1, DJ-Archie, DJ-Georgi, DJ-Telescope, DJ-Wally Lite, Joshua Ceiling, K-Jane, K-Pivot, K-Telescope, MO-Pivot, Tele, Wall Archie, Wall Georgi, Wall Telescope, Wally Lite (sold separately).



700FP TYPE WH
16 MR16



SHOWS LAMP TYPE AND MAXIMUM WATTAGE



INCLUDES A LOUVER LENS HOLDER



INCLUDES A SNAP LOUVER LENS HOLDER



Decorative metal shade. Includes Snap Louver Lens Holder. Can hold a single lens or louver. Silver and black for MR16 of up to 50 watts. Antique bronze for MR16 up to 20 watts only. Available for use on DJ-Archie, DJ-Telescope, DJ-Wally Lite, Joshua Ceiling, K-Pivot, K-Telescope, MO-Pivot, Tele, Wall Telescope (sold separately).

700LMPCO COLOR

- Z ANTIQUE BRONZEB BLACK
- S SILVER



Ribbed glass. Includes Snap Louver Lens Holder. Can hold a single lens or louver. MR16 of up to 50 watts. Available for use on Aero, Helios*, Roto, Tilt, Torpedo Pendant (sold separately).

700MR TYPE

165 MR16 SOLID 16M MR16 MESH FINISH

CH ALUMINUM BZ BK ANTIQUE BRONZE BLACK



Snaps on front of MR16 lamp to hold a single lens or louver. Available for use on DJ-Archie, DJ-Telescope, DJ-Wally Lite, Joshua Ceiling, K-Jane, K-Pivot, K-Telescope, MO-Pivot, Tele, Wall Telescope (sold separately).

) 2" 51 mm

700A06-CH



SHOWS LAMP TYPE AND MAXIMUM WATTAGE



INCLUDES A LOUVER LENS HOLDER



INCLUDES A SNAP LOUVER LENS HOLDER



Prevents side glare from MR16 lamp. Requires Louver Lens Holder (sold separately). Available for use on CP1, DJ-Archie, DJ-Georgi, DJ-Telescope, DJ-Wally Lite, Joshua Ceiling, K-Bye-Bye, K-Hello, K-Jane, K-Pivot, K-Telescope, MO-Pivot, Tele, Wall Archie, Wall Georgi, Wall Telescope, Wally Lite (sold separately).



700Snoot

FINISH

A ALUMINUM B BLACK



Secures to front of MR16 lamp to control light. Includes Louver Lens Holder. Can hold up to two lenses or louvers. Available for use on DJ-Archie, DJ-Telescope, DJ-Wally Lite, Joshua Ceiling, K-Jane, K-Pivot, K-Telescope, MO-Pivot, Tele, Wall Telescope (sold separately).



700A08-BK



Hexcell louver cuts glare from lamp.



700	SIZE		DIAMETER
	A02-BK	MR16 / PAR16	2.0" / 51 mm
	A03-20	PAR20	2.5" / 64 mm
	A03-30	PAR30	3.75" / 95 mm
	A02-36	AR111	4.0" / 102 mm
	A03-38	PAR38	4 75" / 121 mm



SHOWS LAMP TYPE AND MAXIMUM WATTAGE

(L) INCLUDES A LOUVER LENS HOLDER (5)

INCLUDES A SNAP LOUVER LENS HOLDER

The cleanest, easiest display lighting solution yet. Select a mounting option: 4" round canopy, 2" square canopy, connector ports, 4" round swivel canopy, or DJ Screw-on and install. Push the DisplayJack fixture's arms (P. 639) into the canopy or port. After the show, pull the Display Jack element out—the canopy or ports stay in place for next time. No need for an electrician.

4" ROUND CANOPY

Mounts to a standard 4" junction box with round plaster ring (provided by electrician). 12 volt, 75 watt electronic transformer (included) fits inside junction box.

700DJ4RF CANOPY

B BLACK C CHROME





2" SOUARE CANOPY

Mounts to our special 2" square, 6" deep junction box (included). 12 volt, 75 watt electronic transformer (included) fits inside junction box.

700DJ2SQ6 CANOPY

B BLACK

C CHROME





4" ROUND SWIVEL CANOPY

Mounts to a standard 4" junction box with round plaster ring (provided by electrician). 12 volt, 75 watt electronic transformer (included) fits inside junction box. Fixture pivots up and down at canopy.

700DJ4RS CANOPY

B BLACK C CHROME





Designed with a special screw-on bracket to fit lightweight portable booths. Leave two screws in or on top of wall for quick mounting of the keyhole bracket. Complete with 12 volt, 75 watt plug-in transformer and 10' cord. Chrome only.





CONNECTOR PORTS

Install these two receptacle ports through panel up to 4" thick. Access to back of panel required. 12 volt, 75 watt plug-in transformer with 10' cord plugs into a standard outlet. Chrome only.

800RAL5CWZ









DJ-ARCHIE

17.5" long, with a 10" high swooping curve. Pivots at head to direct beam. 12 volt, MR16 lamp of up to 75 watts (not included). Chrome finish.

700DJARCHC

WITH CONNECTOR PORTS

DJ-GEORGI

18" long with a 3" high gentle curve. Pivots at head to direct beam. 12 volt, MR16 lamp of up to 75 watts (not included). Chrome finish.

700DJGRGC



WITH CONNECTOR PORTS

DI-WALLY LITE

Available in two lengths. Pivots at head to direct beam. Field-cuttable. 12 volt, MR16 lamp of up to 75 watts (not included). Chrome finish.

700DJWALC

24" LONG **700DJWAL12C** 12" LONG WITH CONNECTOR PORTS

DI-TELESCOPE

Telescopes from 9" to 25". Pivots at head to direct beam 12 volt, MR16 lamp of up to 75 watts (not included). Chrome finish.

700DJGRGC



COMPATIBLE ACCESSORIES: Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Lil Wok, MR16 Snoot, Round Glass Shield or Snap Louver Lens Holder Accessory (sold separately P. 588-593)

DISPLAY JAC

Flexibility is the hallmark of all Compact Series (CP) display fixtures. The CP's arms telescope from 9" to 25" and angle up to 180°; the lamp rotates 330° and the CP holds steady however it's positioned. It automatically shuts itself off in case of short circuit (if arms cross), then turns on again when the short is corrected.

CP1 CLAMP-ON LIGHT

FreeJack canopy options

on P. 312-313

Lightweight and versatile, CP1 features a universal clamp that provides a secure grip on any surface shape—from 1/2" pipe to 4" wall. Complete with 12 volt plug-in transformer with in-line switch and 10' cord. Chrome arms with black or white clamp. Specify 50 or 75 watts. 12 volt, MR16 lamp not included.



CP CORD EXTENDER

Use to add an additional 8' of cord to CP1 and Display Jack connector ports (P. 594).

700CPEXT	CANOPY	
	B BLACK W WHITE	7

COMPATIBLE ACCESSORIES: Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Lil Wok, MR16 Snoot, Round Glass Shield or Snap Louver Lens Holder Accessory (sold separately P. 588-593)

Joshua comes in a range of lengths to bring the light right where you need it. Joshua pivots left to right and the lamp rotates 330°. Specify chrome arms with chrome or black canopy. May be dimmed with a standard incandescent dimmer. Custom lengths and bends available.

JOSHUA 2" CANOPY

2" square flush canopy mounts to our special 2" square, 6" deep junction box (included). Electronic transformer fits inside junction box. For ceiling only. 3" length: 12 volt, MR16 up to 50 watts. Other lengths: 12 volt, MR16 up to 75 watts. Lamp not included.

WITH BACKLIGHT SHIELD ACCESSORY

JOSHUA 4" ROUND FLUSH CANOPY

4" round flush canopy mounts to a standard 4" square junction box with round plaster ring (provided by electrician). Electronic transformer fits inside junction box. 3" to 24" versions for wall or ceiling mount, 36" to 72" versions for ceiling only. 3" length: 12 volt, MR16 up to 50 watts. Other lengths: 12 volt, MR16 up to 75 watts. Lamp not included.

700JSC	LENGTH		FII	FINISH	
	03	3"	В	BLACK	
	067	6"	C	CHROME	
	127	12"			
	367	36"			
	487	48"			
	607	60"			
	727	72"			



4" ROUND FLUSH CANOPY

COMPATIBLE ACCESSORIES: Backlight Shield, Barndoors, Cone Glass Shield, Eggcrate Louver, Flight Paper, Lil Wok, MR16 Snoot, Round Glass Shield or Snap Louver Lens Holder Accessory (sold separately P. 588-593)

OSHUA CEILING

LIL WONDER

Just 4" tall, Lil Wonder goes anywhere! The canopy can screw onto a wall or sit on the floor. Automatic shut-off if tipped over. Complete with 12 volt plug-in transformer with in-line switch and 10' cord and 35 watt MR11 lamp.



700F2- FINISH

BLK BLACK SN SATIN NICKEL WHT WHITE

JOSHUA AND MEG PICTURE LIGHTS

These elegant, unobtrusive picture lights are designed to properly illuminate your artwork and eliminate glare. Choose a lamp that will provide the proper beam spread. By changing lamps or adding a lens, you can light an area as small as four inches square or as large as four feet square!

Both Joshua and Meg are available to plug in or junction box mount. Plug-in version has 10' cord with in-line switch and plug-in transformer. Each includes 12 volt 60 watt transformer, matching Lil Wok accessory, lens holder clip and UV-protected MR16 lamp.

Joshua and Meg junction box are dimmable with a standard incandescent dimmer.

700	TYPE		MOUNTING	FI	FINISH	
	JOS	JOSHUA	CP J-BOX MOUNT	В	BLACK	
	MEG	MEG	PL PLUG-IN	C	CHROME	
				G	GOLD (BRASS)	

FIXTURE	LAMP	ALONE	WITH DIFFUSER LENS	WITH SPREAD LENS
JOSHUA	7° 20W	4" X 4"	20" X 24"	4"W X 36"H
	15° 50W	6" X 6"	24" X 30"	6"W X 36"H
	27° 20W	10" X 10"	30" X 36"	12"W X 36"H
	36° 20W	13" X 13"	29" X 30"	12"W X 36"H
	38° 50W*	20" X 32"	36" X 42"	12"W X 36"H
	60° 50W	30" X 45"	48" X 48"	12"W X 36"H
MEG	36° 20W	8" X 8"	16" X 20"	7"W X 24"H
	60° 50W*	14" X 14"	24" X 14"	10"W X 26"H

^{*} INCLUDED WITH PICTURE LIGHT

LIL BIG WONDER


A compact, powerful accent lamp with a plug-in transformer, 4.75" tall. The canopy can screw onto a wall or sit on the floor. Automatic shut-off if tipped over. Complete with 12 volt plug-in transformer with in-line switch and 10' cord and 50 watt MR16 lamp.




BLK BLACK SN SATIN NICKEL WHT WHITE






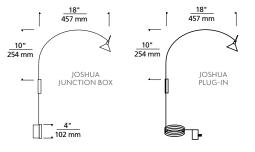





Specially designed for use in gallery applications, a high-powered LED module offers impressive output while maintaining high color reproduction qualities including 90+ CRI values. Most importantly, the LED light source eliminates harmful ultraviolet wavelengths common in standard halogen lamps.



LINE-VOLTAGE

- 7 watt, 460 delivered lumen, 2700k or 3500k LED moudule / J-box mount version dimmable with low-voltage electronic dimmer.

SPECIFICATIONS

→ Head pivots 330 degrees to easily direct the beam.
40° optic. 50" x 50" max recommended picture dimension.
Plug in version includes an integrated on / off switch and dimming control standard.

700DEMNLS	MOUNTING	FINISH	LAMP	
	CP J-BOX MOUNT	Z ANTIQUE / POLISHED BRONZE	-LED835 80 CRI 3500K 120V LED	





TECH LIGHTING®

EACH OF TECH LIGHTING'S FIVE COMPLETE LIGHTING SYSTEMS OFFERS UNIQUE FEATURES AND BENEFITS CAPABLE OF SOLVING EVEN THE MOST COMPLEX LIGHTING CHALLENGES.

THE FOLLOWING PAGES OFFER SEVERAL SPECIFIC CASE STUDIES WHICH DEMONSTRATE HOW EACH SPECIFIC SYSTEM CAN BE USED TO ACHIEVE SEVERAL HIGHLY FUNCTIONAL YET STILL BEAUTIFUL CONTEMPORARY LIGHTING SCHEMES.

Here, we share the basic steps to designing a Tech Lighting system:

1 ESTABLISH YOUR LIGHTING GOALS

Determine what lighting effect you are looking to achieve in your space. For example, do you need general illumination in a space with irregular ceilings? Do you need task lighting over a kitchen island or other work surface? Do you need to highlight artwork or architectural features? Are you seeking eye-catching accent lighting? Maybe you need to achieve two or more of these goals simultaneously? To select the lighting system that best suits your needs, please refer to the helpful case studies in the pages that follow which highlight ways to match the right system to meet your goals.

2 SELECT YOUR FIXTURES

Browse Tech Lighting's collection of hundreds of compatible pendants and spot heads to select the fixtures that will achieve your ideal lighting effect. Refer to this Full Line Catalog or go to www.techlighting.com to explore all the fixtures offered. Make sure every fixture you select is compatible with the lighting system you intend on using. Throughout our catalog and website, you will see the following system designations within the ordering grids of many pendants and spot heads. Please be sure the correct designation is noted in the fixture's item number to match your selected system:



3 CONFIGURE YOUR SYSTEM

As you determine the length and orientation (linear, curved) of your system, reference the separate Tech Lighting Systems Ordering Guide to select the components needed to achieve your goal. This guide is available in print from your local Tech Lighting Sales Rep or Authorized Showroom Retailer and online at www.techlighting.com/systems. To help automate the configuration step, you may also visit our Online System Configurator at http://configurator.techlighting.com for assistance with creating a list of required components.

4 PLACE YOUR ORDER

Go to www.techlighing.com/HowToBuy to find a local Tech Lighting Specification Sales Rep or Authorized Showroom Retailer near you to review your configuration and place your order.







MONORAIL

The ultimate combination of design-centric aesthetics and incredibly flexible capabilities, low-voltage MonoRail has been used by lighting designers for decades to solve complex lighting challenges while achieving impressively minimalist lighting schemes. Whether simply replacing a bland kitchen ceiling fixture with a beautiful system of decorative pendants, designing a dramatically curved system with alluring visual interest, configuring a system to complement a space's architecture as shown here, or anything in between; hand-bendable and field cuttable MonoRail can be configured in thousands of ways for a virtually limitless number of residential and commercial applications.




Provide general illumination and highlight the architecturally significant fireplace in a space with extremely tall vaulted ceilings and exposed wooden beams.

MONORAIL SOLUTION

Suspend dual runs of Monorail from the exposed wooden beams using Rigid Standoffs and utilize Square End Power Feeds and 150w Remote Transformers to provide power via an interior wall where wiring is readily accessible. Next, install two Tilt Heads over the living space to provide general illumination and another three Tilt Heads near the wall to accent the stone fireplace.

MONORAIL COMPONENTS

- (x6) **96" MonoRail** #700MOAS
- (x2) 2" Square Direct-End Power Feed #700MOP2CDS
- (x2) 150W Remote Trandformer #700AT152EL
- (x8) 2" Rigid Standoff #700MOS02S
- (x5) 12" Tilt Head #700MOTLT12S

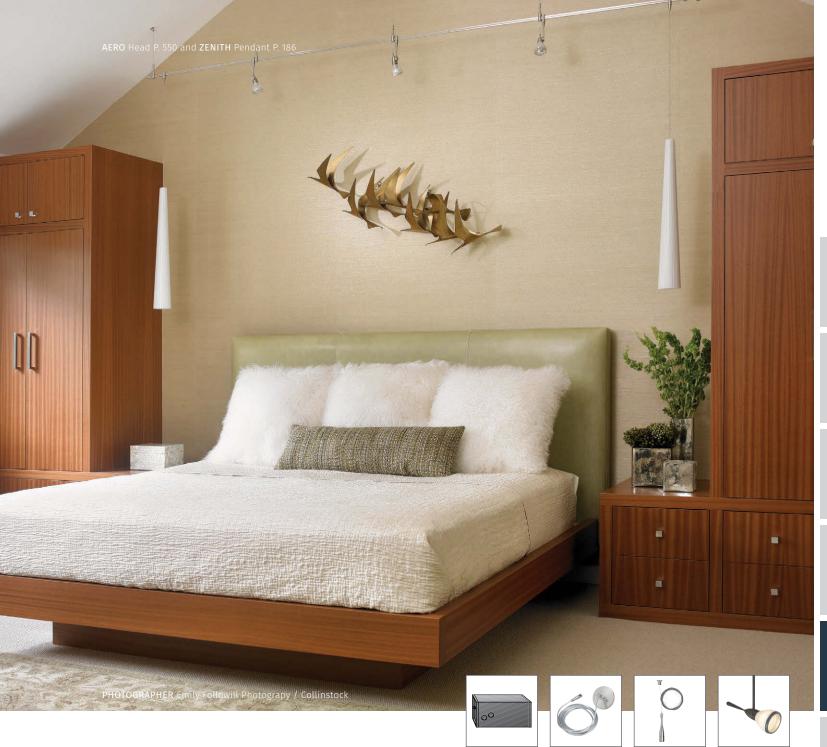


Provide a sleek accent lighting solution which reinforces the warmth of a contemporary bedroom while mitigating the complication of a steeply vaulted ceiling.

MONORAIL SOLUTION

The ability to combine accent and ambient illumination on a single system simplifies the task at hand while offering an uniquely attractive alternative to standard recessed lighting and table lamps. Here, a simple MonoRail System is used to traverse the steeply sloped ceiling, enabling accent lighting to be applied to the textural artwork above the headboard while beautiful white glass Zenith pendants function as lamp shades over the integrated nightstands.

MONORAIL COMPONENTS

- (x1) 96" MonoRail #700MOAS
- (x1) 300W Remote Transformer #700AT302EL
- (x1) Center Power Feed #700MOPCENS
- (x3) Adjustable Standoff #700MOSADJS
- (x3) 3" Aero Head #700MOAE3S
- (x3) Round Glass Shield #700MR16GF
- (x2) Zenith Large Pendant #700MOZENLWS

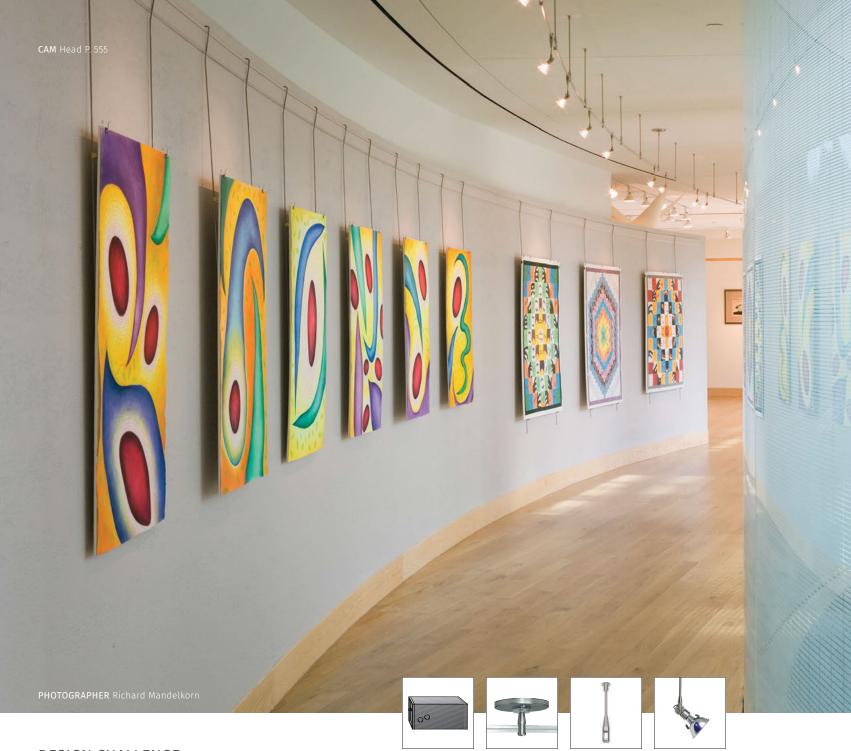

Highlight individual art pieces along a long, curving corporate office corridor with a lighting solution that complements the space's architecture.

MONORAIL SOLUTION

MonoRail is hand-bendable, so creating a custom radius is easy. Simply mark where you want the MonoRail to curve by installing the Rigid Standoffs and Single Feed Canopy with Power Extender into the ceiling at evenly spaced intervals, then gently bend the rail to match the radius and attach it to the standoffs. Finally, install the Cam Heads directly in front of the art and aim as needed.

MONORAIL COMPONENTS

- (x4) 96" MonoRail #700MOAS
- (x2) 300W Remote Transformer #700AT302EL
- (x2) 4" Round Single Feed Canopy #700MOP4C02S
- (x1) 12" Power Extender #700MOP12S
- (x12) 12" Rigid Standoff #700MOS125
- (x10) 3" Cam Head #700MOCAM03S



Create an alluring ceiling light installation that not only complements, but contributes to the elegant sweeping design elements present in the space.

MONORAIL SOLUTION

With the hand-bendable nature of MonoRail, creating an elaborate-looking ceiling installation is easier than it seems. Start by designing the flowing lines you want the MonoRail to create, then hand-bend the rail on a work surface and dry fit the sections together to until you achieve your design vision. Next, begin attaching the Rigid Standoffs to the ceiling where appropriate and complete the installation of your custom system.

- (x6) 96" MonoRail #700MOAS
- (x2) 150W Remote Transformer #700AT152EL
- (x2) 2" Square Single Feed Canopy #700MOP2C02S
- (x15) 2" Rigid Standoff #700MOS02S
- (x4) 3" Spot Head #700MOSPT604S





TWO-CIRCUIT MONORAIL

Combine the unmatched versatility of MonoRail with the ability to independently control power and dimming on two separate circuits, and the result is Two-Circuit Monorail. Some of the best lighting designs call for the use of a combination of decorative accent lighting, task-oriented lighting and layers of general illumination all within the same space. With Two-Circuit MonoRail, any two of these elements can easily be combined onto the same low-voltage lighting system for further flexibility while maintaining a minimal system profile under 1" in height. In the application shown here, it is easy to imagine certain times of the day which you would like to control the general illumination spot heads in the center of the room totally separately from the accent-oriented heads that flank each side of this impressive space.



Provide general illumination throughout and task lighting on the island without damaging the structural concrete ceiling of this urban kitchen.

TWO-CIRCUIT MONORAIL SOLUTION

Many urban apartments and condos have structural concrete construction that can quickly complicate retrofit and renovation projects. Here, Spot Heads are used in the open area while Piper Pendants put a punch of light onto the task surface. With Two-Circuit MonoRail, both subsystems can be powered on/off and dimmed independently with a single, design centric solution.

TWO-CIRCUIT MONORAIL COMPONENTS

- (x6) 3" Spot Head #700MO2SPT604S / P. 560
- (x3) Piper Pendant #700MO2PPRSS / P. 178

- (x4) **96**" Two-Circuit MonoRail #700MO2A96S / P. 32
- (x1) 2 x 250W Surface Transformer # 700MO2SRT50DS / P. 36
- (x12) 3" Rigid Standoff #700MO2S03S / P. 34



Independently illuminate artwork on large interior wall, as well as a kitchen island in need of task lighting in a space with ultra-open architecture.

TWO-CIRCUIT MONORAIL SOLUTION

Two-Circuit MonoRail can be configured with hundreds of parts and accessories to accommodate nearly any application. Above, the system has been dropped from the tall ceilings of an urban loft apartment using longer Rigid Standoffs, and a satellite arm extends into the kitchen using a T-Connector where the John Heads be controlled independently from those highlighting the artwork along the wall.

TWO-CIRCUIT MONORAIL COMPONENTS

(x7) 12" John Head #700MO2JON12S / P. 556

- (x5) **96**" Two-Circuit MonoRail #700MO2A96S / P. 32
- (x1) T-Connector #700MO2CTTS / P. 38
- (x1) 2 x 250W Surface Transformer #700MO2SRT50DS / P. 36
- (x1) **48" Power Extender** #700MO2P48S / P. 36
- (x4) 48" Rigid Standoff #700MO2S48S / P. 34
- (x3) 6" Rigid Standoff #700MO2S06S / P. 34



Illuminate a space void of recessed downlights with layers of general and accent lighting while complementing its contemporary design scheme.

TWO-CIRCUIT MONORAIL SOLUTION


Due to its inherently slim profile and highly configurable nature, Two-Circuit MonoRail can be used as a design tool as well as a means of illuminating a space. Here, Spot Heads are populated on separate circuits – one highlighting the decorative wood panels and the other providing general illumination – while the system itself mimics other rectangular design elements used throughout the space.

TWO-CIRCUIT MONORAIL COMPONENTS

(x1) 4" Spot Head #700MO2SPT604S / P. 560 (x10) John Head #700MO2JON03S / P. 556

- (x9) 96" Two-Circuit MonoRail #700MO2A96S / P. 32
- (x4) T-Connector #700MO2CTTS / P. 38
- (x2) Flexible Horizontal Connector #700MO2CFXHS / P. 38
- (x2) 2 x 250W Surface Transformer #700MO2SRT50DS / P. 36
- (x2) 4" Round Single Power Feed Canopy #700MO2P4C02S / P. 36
- (x20) 6" Rigid Standoff #700MO2S06S / P. 34



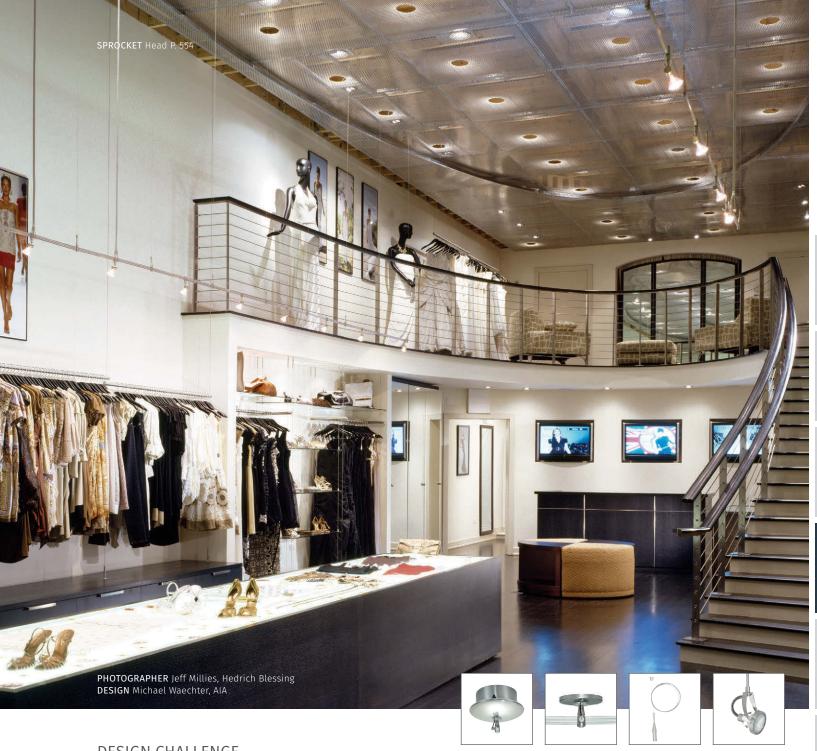

Create layers of light in a retail space that are easily reconfigured, re-aimed and controlled independently as merchandising needs change over time.

TWO-CIRCUIT MONORAIL SOLUTION

Two-Circuit MonoRail is a great solution for lighting dynamic retail environments due to its long-term flexibility and zonal control capabilities. Retail spaces commonly undergo merchandising resets where new products or displays may need to be highlighted. Not only can spot heads quickly be relocated and re-aimed, but they can be controlled on two separate dimming lines for ultimate lighting control.

TWO-CIRCUIT MONORAIL COMPONENTS

(x16) 4" Sprocket Head #700MO2SP6S / P. 554


- (x6) **96**" **Two-Circuit MonoRail** #700MO2A96S / P. 32
- (x2) 2 x 250W Surface Transformer #700MO2SRT50DS / P. 36
- (x2) 4" Round Single Feed Canopy #700MO2P4C02S / P. 36
- (x1) **96" Power Extender** #700MO2P96S / P. 32
- (x14) 144" Adjustable Standoff #700MO2SADJS / P. 34





WALL MONORAIL

For specialized applications where standard MonoRail or other track systems aren't totally feasible, low-voltage Wall MonoRail offers a truly ingenious solution. Mounted directly to the vertical surface of a wall, this system allows lighting designers to highlight artwork, illuminate architectural features and put light in hard to reach places with ease. In addition to our extensive offering of spot heads, several purpose-built display heads such as those shown here are also available to creatively solve lighting challenges in the home or office with a contemporary twist.

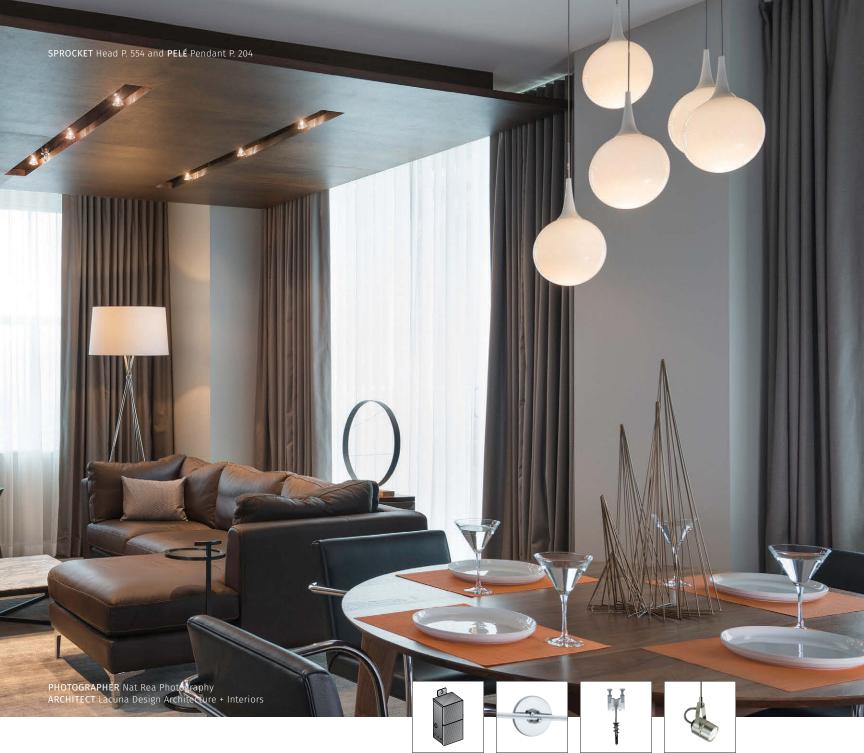

Light a contemporary space with a creative and visually interesting approach to general illumination while drawing attention to a modern wood ceiling.

WALL MONORAIL SOLUTION

Here, the designer and architect collaborated to create a truly special space. A beautiful modern hardwood drop ceiling was purposely interrupted with three sleek linear recessed channels then Wall MonoRail was discreetly used to provide overhead illumination from the sides without the clutter of visible system hardware. Evenly spaced Spot heads with wide angle lamps provide an evenly distributed, fully dimmable general illumination over the sitting area.

WALL MONORAIL COMPONENTS

(x9) 4" Sprocket Head #700WMOSP6S / P. 554

- (x3) 96" Wall MonoRail #700MOA96S / P. 50
- (x3) 150W Remote Transformer #700AT152EL / P. 54
- (x3) 4" Power Feed Canopy #700WMOP4RS / P. 55
- (x9) Wall MonoRail Standoff #700WMOS01S / P. 53



Highlight the well documented historical renovation of a notable public building for its visitors without interrupting the new open, contemporary design.


WALL MONORAIL SOLUTION

To avoid having to suspend conventional track lighting from the ceiling which would disrupt the open, airy feel of this newly renovated atrium, the designer smartly chose to employ Wall MonoRail to effectively highlight the historical story boards and images with light. Wall MonoRail nearly disappears into the architecture as Wall Archie heads gracefully extend from the system to provide visitors with a well-illuminated trip down memory lane.

WALL MONORAIL COMPONENTS

(x5) Wall Archie Head #700WMARCHS / P. 578

- (x1) **96**" **Wall MonoRail** #700MOA96S / P. 50
- (x1) 48" Wall MonoRail #700MOA48S / P. 50
- (x2) 150W Remote Transformer #700AT152EL / P. 54
- (x2) 4" Power Feed Canopy #700WMOP4RS / P. 55
- (x6) Wall MonoRail Standoff #700WMOS01S / P. 53

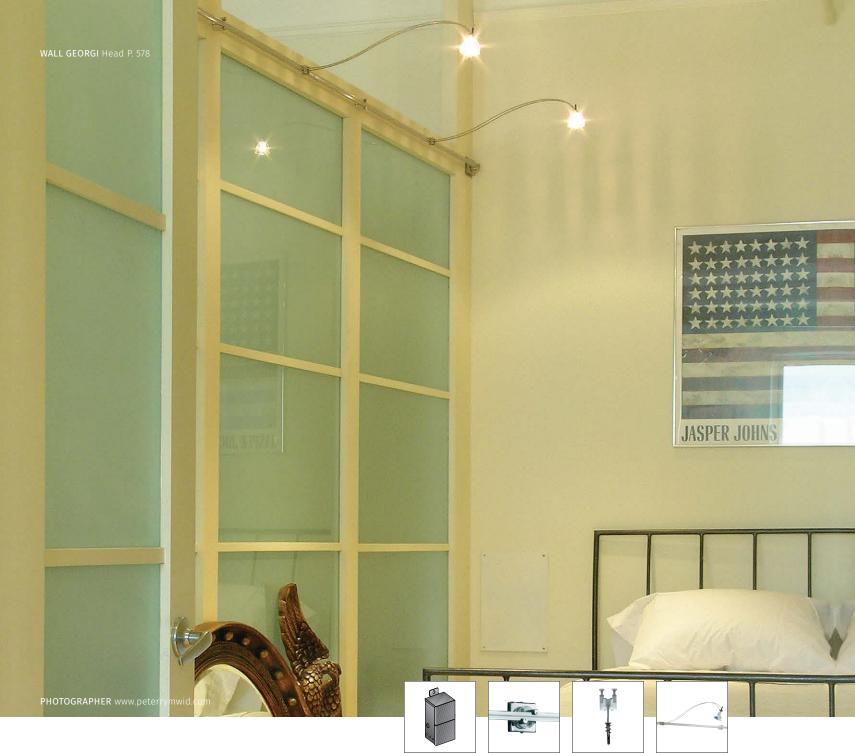

Bring light to an ultra-small urban loft apartment with partitioned walls, high irregular ceilings and no overhead electrical access.


WALL MONORAIL SOLUTION

Complicated electrical access and tight quarters led this designer down the path of using Wall MonoRail to illuminate the partitioned bedroom area of this urban loft. Since every square inch counts in a space like this, a tiny 2" Power Feed was used to provide power from an interior wall while Wall MonoRail is discretely tucked into a thin section at the top of the wall. Wall Georgie heads are used to extend the light sources away from the wall while maximizing overhead clearance and light distribution.

WALL MONORAIL COMPONENTS

(x3) Wall Georgie Head #700WMGRGS / P. 578

- (x1) 48" Wall MonoRail #700MOA48S / P. 50
- (x1) 150W Remote Transformer #700AT152EL / P. 54
- (x1) 2" Square Power Feed Canopy #700WMOP2SQS / P. 55
- (x2) Wall MonoRail Standoff #700WMOS01S / P. 53

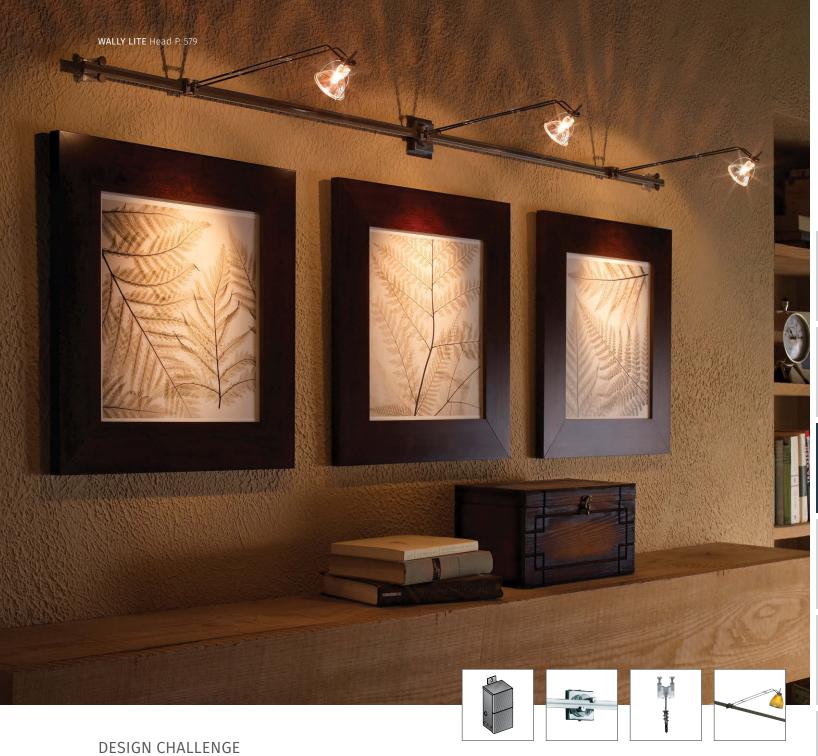

Reinforce the warm, transitional aesthetic present in a family room by cleanly highlighting rich, organic artwork hung above the rustic fireplace mantle.

WALL MONORAIL SOLUTION

In addition to the popular satin nickel finish commonly specified for contemporary spaces, Wall MonoRail is also available in a warm antique bronze finish, extending the versatility story of Wall MonoRail into transitional spaces alike. Here, the deep antique bronze finish of the system complements the warm wood tones and textures present in the space while the special 2" Square Power Feed nearly disappears. Using 12" Wally Lite heads, the designer was able to provide just the right amount of well controlled, fully dimmable light to achieve the design objective.

WALL MONORAIL COMPONENTS

(x3) 12" Wally Lite Head #700WMWAL12Z / P. 579

- (x1) 48" Wall MonoRail #700MOA48Z / P. 50
- (x1) 150W Remote Transformer #700AT152EL / P. 54
- (x1) 2" Square Power Feed Canopy #700WMOP2SQZ / P. 55
- (x2) Wall MonoRail Standoff #700WMOS01Z / P. 53





KABLE LITE

Some of the most incredible contemporary architecture can create real challenges for lighting designers to overcome. Take the amazingly open space here for example - enormous exposed beam construction, beautiful tongue and groove wood decking, plus a 15° sloped ceiling. Scenarios like this make employing traditional lighting sources such as recessed fixtures, ceiling flush mounts, even track or MonoRail nearly impossible without causing major damage or undertaking a major construction project. Kable Lite, however utilizes a system of tightly suspended low-voltage cables to effectively provide lighting across large, open spans without damaging precious architectural elements and without incurring additional construction costs.



Provide decorative accent and task lighting above a kitchen island within a newly renovated industrial building without damaging the historic bricks and beams.

KABLE LITE SOLUTION

With the ability to omit power and susapension points from above, Kable Lite can be used to solve many lighting challenges where lighting is desired within spaces with open architecture. Here, the designer smartly suspended two parallel runs of Kable Lite by attaching the systems directly to the wooden cabinetry where power access is readily available, then attaching beautiful Kiev pendants and task-oriented K-Bye-Bye heads to provide the well-balanced light within this impressive kitchen. This solution allowed the owners to avoid drilling holes into the antique walls or overhead beams, thus preserving the structure for years to come.


KABLE LITE COMPONENTS

- (x4) K-Bye-Bye Head #700KBYENC / P. 575
- (x3) Kiev Pendant #700KLKIEWCS / P. 140

TECH LIGHTING SYSTEMS ORDERING GUIDE

(x40) Insulated Cable #700KLAINSCL / P. 66

- (x2) 150W Remote Transformer #700AT152EL / P. 71
- (x2) Power Feed Turnbuckles #700PRC14S / P. 74
- (x2) Slimline Anchors #700PRTTOS / P. 68

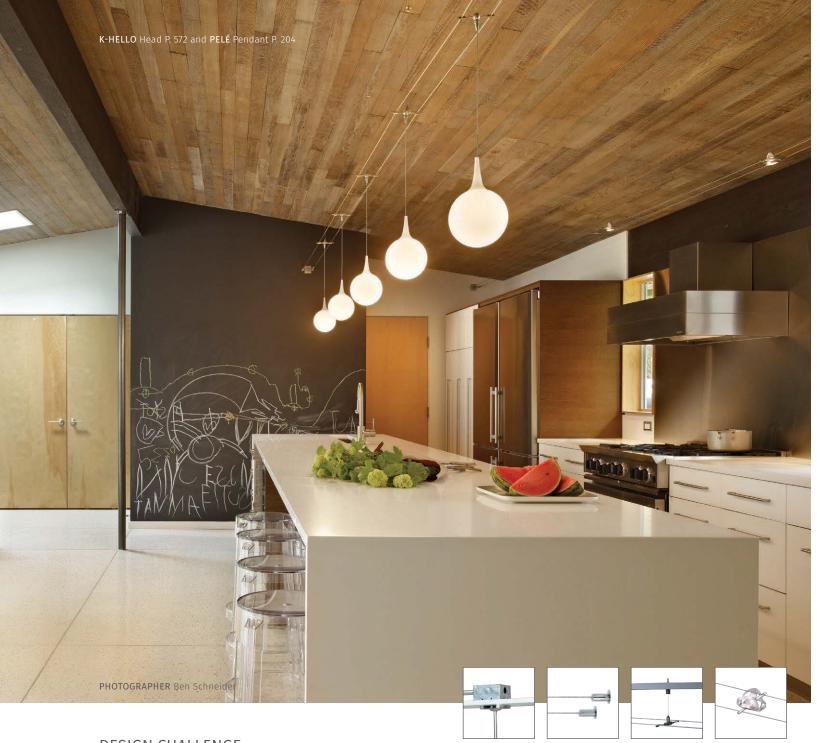

Suspend decorative pendant lighting above an elongated kitchen island without disrupting the open, airy feeling of a mid-century modern home.


KABLE LITE SOLUTION

When working on the lighting design for this beautiful mid-century modern renovation, it was imperative to maintain the integrity of the two major design elements within the space: the open, gently vaulted ceiling & the beautiful hardwood ceiling. Kable Lite is the perfect solution to both areas of concern. First, its ultra-slim wire profile is nearly invisible as it floats above the kitchen; second, even with this expansive run and five relatively heavy glass pendants suspended, only a single tiny hole was drilled into the ceiling to support the system at its center. To complete the look, retro-inspired Pelé pendants were selected to complete the look.

KABLE LITE COMPONENTS

- (x2) K-Hello Head #700KHELLO5 / P. 572
- (x5) Pelé Pendant #700KLPELWS / P. 204

- (x40) Insulated Cable #700KLAINSCL / P. 66
- (x2) 300W Remote Transformer #700AT302EL / P. 71 (x2) 4" Round Single Feed Canopy #700KP4C24S / P. 72
- (x2) Slimline Turnbuckles #700PRTT1S / P. 68
- (x1) Adjustable Standoff #700PRTD3S / P. 70

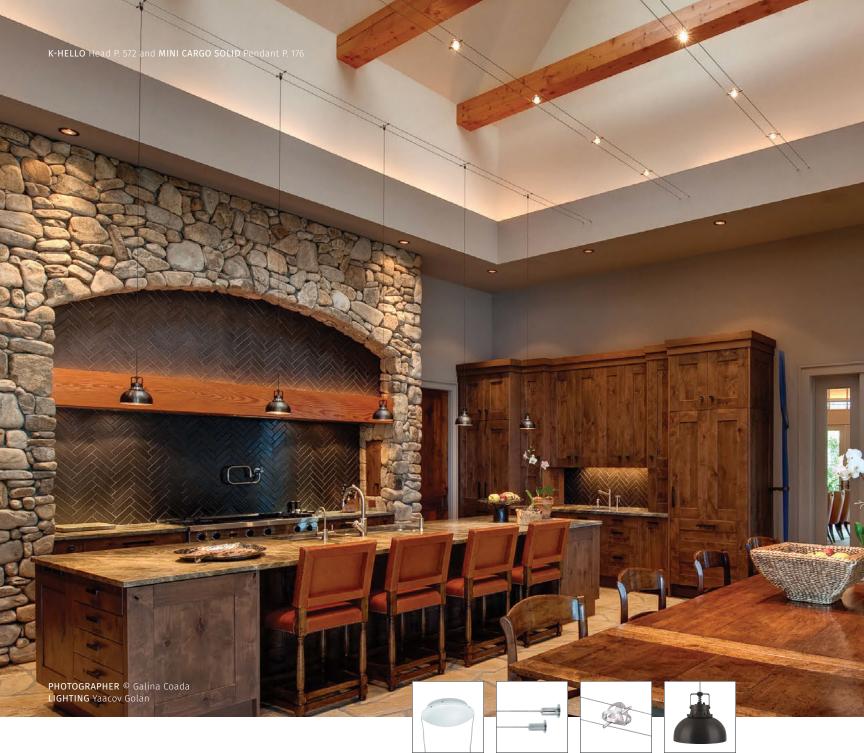

Devise a method of providing evening illumination to an expansive kitchen which receives it daytime light from multiple skylights within a steeply vaulted ceiling.

KABLE LITE SOLUTION

By its very nature, Kable Lite can solve lighting challenges in simpler, easier and more cost effective ways than traditional lighting systems. Here, the designer took advantage of Kable Lite's slim, floating form factor to quickly resolve the issue at hand. Two cable runs powering low-profile K-Hello heads are suspended at even increments at the opening of the vaulted ceiling to provide uninterrupted general illumination while a third cable run supports five handsome Mini Cargo pendants which provide ample task lighting on the elongated island surface below.

KABLE LITE COMPONENTS

(x10) K-Hello Head #700KHELLO5 / P. 572

(x5) Mini Cargo Pendant #600KLMCRGSZ / P. 176


TECH LIGHTING SYSTEMS ORDERING GUIDE

(x60) Insulated Cable #700KLAINSCL / P. 66

(x3) 300W Remote Transformer #700AT302EL / P. 71

(x3) 4" Round Single Feed Line Turnbuckles #700PRTT1S \angle P. 68



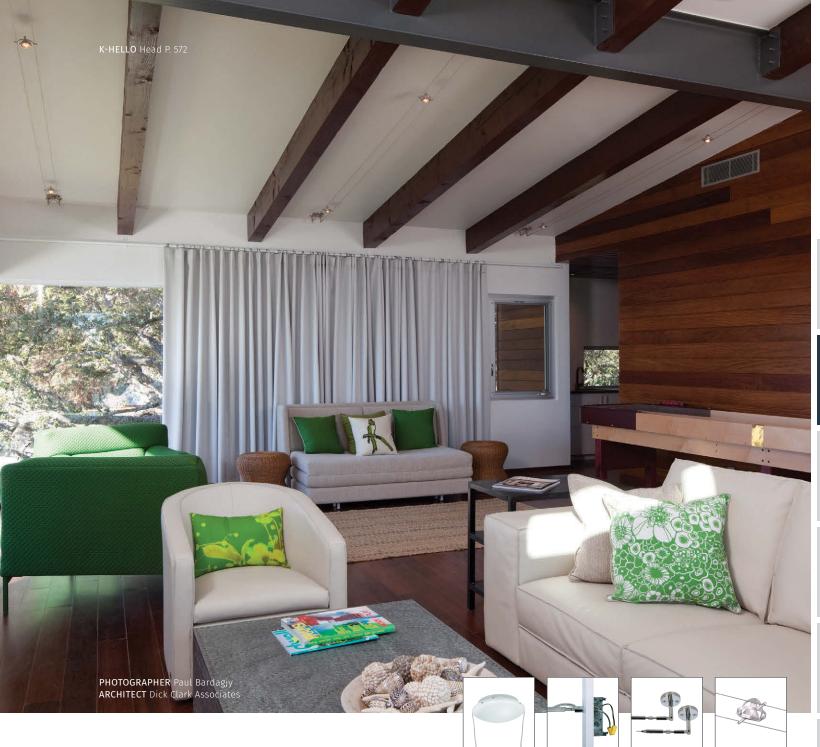

Retrofit this mid-century modern living space's vaulted ceiling with a solution to provide general illumination while echoing the linear nature of the wooden beams.

KABLE LITE SOLUTION

To mimic the linear nature of the architectural wooden beams while preserving their historic nature, three parallel Kable Lite systems were recessed between the beams as not to obstruct the open flow of the vaulted space. To keep the style and spacial impact to a minimum, ultra-sleek K-Hello heads were installed to provide highly-functional general illumination throughout the various areas of this special room.

KABLE LITE COMPONENTS

(x6) K-Hello Head #700KHELLO5 / P. 572

TECH LIGHTING SYSTEMS ORDERING GUIDE (x45) Insulated Cable #700KLAINSCL / P. 66

- (x3) 150W Remote Transformer #700AT302EL / P. 71
- (x3) Power Feed Turnbuckles #700PRC14S / P. 74
- (x3) Universal Turnbuckles #700PARTTS / P. 68





T-TRAK

When seeking a clean, contemporary alternative to traditional 120v track systems, look no further than the T-TRAK lighting system. This hand-bendable and field cuttable line-voltage rail system allows lighting designers to create customized runs using a standard 120v, 20 amp circuit without having to use transformers as required by low-voltage systems. This makes T-TRAK particularly well suited for commercial applications as seen here, where simpler wiring and the ability to create longer runs are typically preferred. In addition to several powerful spot head options, T-TRAK also offers the option of adding many of our larger-scale pendants to the lighting system.



Provide highly functional accent lighting throughout a retail space within a historic industrial building that is both attractive and reconfigurable.

T-TRAK SOLUTION

With the hand-bendable nature of T-TRAK, creating an elaborate, curved system is easier than it seems. Start by designing the illuminated path you need to weave through your space, then hand-bend the T-TRAK on a work surface and dry fit the sections together to until you achieve your design vision. Next, begin attaching the Rigid Standoffs to the ceiling where appropriate and complete the installation of your custom system. Here, powerful Sportster PAR2O heads are used to aim light exactly where its needed.

T-TRAK COMPONENTS

(x12) Sportster PAR20 Head #700TTSS2008S / P. 584

- (x4) **96" T-TRAK** #700TTA96S / P. 84
- (x3) 36" Rigid Standoff With Connector #700TTSCC36S / P. 86
- (x6) 36" Rigid Standoff #700TTS36S / P. 86
- (x2) 4" Round Single Feed Canopy #700TTP4C36S-8 / P. 87



Illuminate the sign for the information desk within a public library while simultaneously providing task lighting on the work surfaces below.

T-TRAK SOLUTION

Not only is T-TRAK field bendable for custom applications, it is also available from the factory in pre-bent radiuses to accommodate quick and easy curved track system design. Here, four sections of Pre-Bent T-TRAK were combined using various standoffs to instantly create a ten foot diameter circle that is as functional as it is design-centric. Powerful Om PAR20 heads are installed at even intervals and precisely aimed to provide accent lighting for the signage while providing task lighting on the information desk surface.

T-TRAK COMPONENTS

(x10) Om Par20 Head #700TTOM2006SS / P. 582

- (x4) Pre-Bent 90° Curve T-TRAK #700TTBH9060S / P. 85
- (x3) Adjustable Standoff With Connector #700TTSCCADJS / P. 90
- (x3) Adjustable Standoff #700TTSADJS / P. 90
- (x1) Flexible Power Feed Canopy #700TTP4CCENS-8 / P. 88



Provide sleek, contemporary and scalable accent lighting within the reception area of a major hospitality chain that is easy to install and offers long-term reliability.

T-TRAK SOLUTION

Without a doubt, this simple yet highly effective T-TRAK system adds to the upscale, contemporary vibe this hotel chain is rolling out to hundreds of locations nationwide. T-TRAK's simplicity of specification (only four item numbers required to configure this system) and simplicity of installation (can be installed in mere minutes), combined with its long-term reliability and flexibility (aiming and lamping can be quickly reconfigured) make it a great choice for commercial applications such as this.

T-TRAK COMPONENTS

(x4) Sportster Par20 Head #700TTSS2008S / P. 584

- (x1) **96" T-TRAK** #700TTA96S / P. 84
- (x2) 2" Rigid Standoff #700TTS2S / P. 86
- (x1) 4" Round Single Feed Canopy #700TTP4C2S-8 / P. 87



Illuminate a high end Victorian kitchen renovation with clean, contemporary solution that disappears into the architecture.

T-TRAK SOLUTION

In an incredible and historic space such as this, its not surprising that the renovation didn't include recessed downlights that could end up distracting from the ornate woodwork and other architectural features. Instead, white T-TRAK and Spot heads were employed to provide highly targeted illumination throughout he space while melting into the ultra-clean white palate present in this special space.

T-TRAK COMPONENTS

(x6) Spot Par20 Head #700TTSPT2008W / P. 586

- (x1) 96" T-TRAK #700TTA96W / P. 84
- (x2) 24" Rigid Standoff #700TTS24W / P. 86
- (x1) 24" Rigid Standoff With Connector #700TTSCC24W / P. 86
- (x1) 4" Round Single Feed Canopy #700TTP4C2W-8 / P. 87











UNILUME LED SLIMLINE

UNILUME LED DIRECT WIRE

Offers a class-leading combination of performance and aesthetics due to its powerful, uniform light output and diverse offering of fixture options. Ideal for undercabinet and under-shelf.

and under-shelf.

PRODUCT DEPTH 0.74"

PRODUCT WIDTH 2.80"

PRODUCT LENGTHS 7", 13", 19", 31"

WATTAGE 4.0, 8.5, 10.5, 18.0

LUMENS PER WATT 60, 62, 66, 68

LUMENS PER FOOT 527

COLOR TEMPERATURES 2700K, 3000K, 3500K

CRI OPTIONS 90+
POWER FACTOR 0.94
INPUT POWER 120V
DIMMER TYPE ELV

DIMMING RANGE To 5%-15% Depending

on Dimmer

UNIT TO UNIT CONNECTORS

Jumper Connectors

ON / OFF SWITCH Integrated

OCCUPANCY SENSOR N/A

FIELD-CUTTABLE N/A

MAXIMUM RUN LENGTH 70 feet

MOUNTING METHOD Wood Screws

MOUNTING METHOD Wood Screw

INSTALLABLE ANGLES Flush

HOUSING COLORS White, Black
REMOTE PHOSPHOR Yellow

COLOR IN OFF-STATE

WARRANTY 5 years

Unilume LED Direct Wire offers a class-leading combination of reliability and performance with its commercial-grade construction and powerful, consistent light output. Ideal for undercabinet and under-shelf.

PRODUCT DEPTH 1.25"
PRODUCT WIDTH 3.73"

PRODUCT LENGTHS 7", 13", 19", 30"

WATTAGE 4.0, 8.5, 10.5, 18.0

LUMENS PER WATT 60, 62, 66, 68

LUMENS PER FOOT 527

COLOR TEMPERATURES 2700K, 3000K, 3500K

CRI OPTIONS 90+
POWER FACTOR 0.94
INPUT POWER 120V
DIMMER TYPE ELV

DIMMING RANGE To 5%-15% Depending

on Dimmer

UNIT TO UNIT CONNECTORS Contractor Supplied

ON / OFF SWITCH Integrated

OCCUPANCY SENSOR Optional

FIELD-CUTTABLE N/A

MAXIMUM RUN LENGTH 70 feet

MOUNTING METHOD Wood Screws

INSTALLABLE ANGLES Flush
HOUSING COLORS White, Black

REMOTE PHOSPHOR Yellow

COLOR IN OFF-STATE

WARRANTY 5 years



UNILUME LED LIGHT BAR

UNILUME LED MICRO CHANNEL

Unilume LED Light Bar offers the best combination of compact size, performance and versatility. It's unique snap-together design allows for long runs of uninterrupted, uniform light. Ideal for display and cove.

 PRODUCT DEPTH
 0.68"

 PRODUCT WIDTH
 1.13"

 PRODUCT LENGTHS
 7", 13", 19"

 WATTAGE
 4.0, 7.0, 9.0

 LUMENS PER WATT
 76, 78, 81

 LUMENS PER FOOT
 549

COLOR TEMPERATURES 2700K, 3000K, 3500K

CRI OPTIONS 90+

POWER FACTOR 0.95

INPUT POWER 24V DC

DIMMER TYPE ELV

DIMMING RANGE To 5%-15% Depending

on Dimmer

White, Black

Yellow

UNIT TO UNIT CONNECTORS End-to-End or

Jumper Connectors

ON / OFF SWITCH

OCCUPANCY SENSOR

N/A

FIELD-CUTTABLE

MAXIMUM RUN LENGTH

MOUNTING METHOD

Wood Screws

INSTALLABLE ANGLES

Flush, 30°, 45°

REMOTE PHOSPHOR
COLOR IN OFF-STATE

HOUSING COLORS

WARRANTY 5 years

Unilume LED Micro Channel's compact size and superior light performance combine with onsite length customization for applications where custom length, end-to-end illumination are crucial. Ideal for cove, wall grazing and display.

 PRODUCT DEPTH
 0.85"

 PRODUCT WIDTH
 1.02"

 PRODUCT LENGTHS
 12". 24". 48"

WATTAGE 3.2, 6.4, 12.8 (300 lms / ft)

 $6.4, 12.8, 25.6 \ (600 \ lms \ / \ ft)$ LUMENS PER WATT 95

LUMENS PER FOOT 300, 600

COLOR TEMPERATURES 2400K, 3000K, 3500K, 4000K

CRI OPTIONS 80+, 90+

POWER FACTOR 0.95

INPUT POWER 24V DC

DIMMER TYPE ELV

DIMMING RANGE To 5%-15% Depending

on Dimmer

UNIT TO UNIT CONNECTORS Jumper Connectors

ON / OFF SWITCH N/A OCCUPANCY SENSOR N/A

FIELD-CUTTABLE 3" increments (end of run)

MAXIMUM RUN LENGTH 20 feet (600 lms / ft)

40 feet (300 lms / ft)

White

MOUNTING METHOD Wood Screws / Adhesive

INSTALLABLE ANGLES Flush, 30°, 45°, 90°
HOUSING COLORS Aluminum

REMOTE PHOSPHOR
COLOR IN OFF-STATE

WARRANTY 5 years

APPLICATIONS	UNILUME LED SLIMLINE	UNILUME LED DIRECT WIRE	UNILUME LED LIGHT BAR	UNILUME LED MICRO CHANNEL
Undercabinet / Shelves — Residential	• • •	• • •	• •	•
Undercabinet / Industrial / Shelves — Office	• •	• • •	• •	•
Undercabinet / Shelves — Cubicle	• • •	• • •	•	•
Cove			• •	• • •
Toe Kick			• •	• • •
Wall Graze			• • •	• •
Display — Retail / POP	•	•	• • •	• • •
Display — Signage ∕ Backlighting			• • •	• • •
















Museums / Galleries
Offices / Cubicles
Residential
Restaurants / Bars
Retail
Schools
Universities

Most white LEDs are actually blue LEDs with a phosphor coating. The phosphor absorbs the blue light and re-emits the photons at longer wavelengths which we perceive as white light. In most lighting applications, the phosphor is directly on the LED chip; and this is the right approach for many applications. However, by utilizing a remote phosphor solution — a linear phosphor lens that sits above the LEDs — we are able to achieve-performance levels and consistency not possible with traditional LED linear solutions.

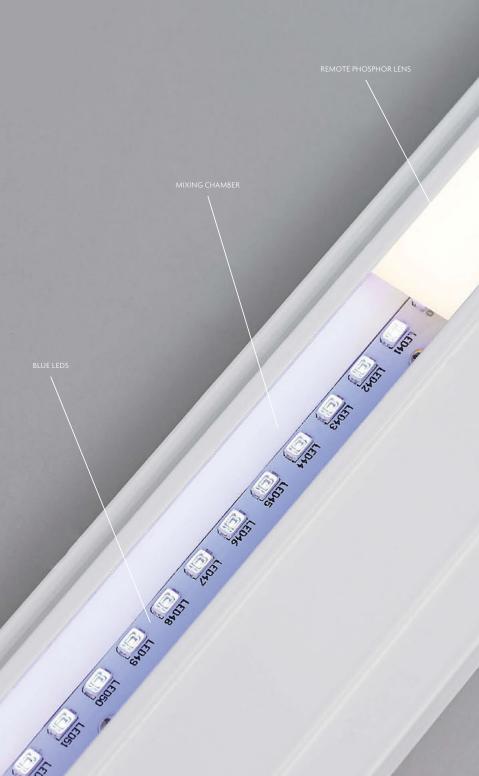

TECH LIGHTING UNILUME LED

VS.

TYPICAL LED SOLUTION

REMOTE PHOSPHOR SOLUTION

Because the entire remote phosphor lens illuminates we are able to achieve an extremely consistent and even wash of light. This is both attractive and easier on the eyes.

Discrete LEDs spaced several inches apart. Each LED appears extremely glary. Unattractive dots of light appear on any reflective surface.

ELIMINATES DISTRACTING 'MULTI-SHADOWS'

Because the entire remote phosphor lens is illuminated multiple shadows are not produced.

Each point source of light hits an object at a different angle and creates a shadow at that angle. For every LED, a unique shadow is created.

WIDE BEAM DISTRIBUTION

The entire phosphor lens is illuminated and sits at the surface of the housing creating a much wider beam distribution. This makes it possible to use fewer units spread at greater distances with more even output over the entire space.

LEDs are typically recessed into the housing or hidden behind a diffusing lens. This causes light cut-off at the edges

COLOR CONSISTENCY OVER TIME

The phosphor sits away from the LED and remains cooler over time. Therefore the phosphor does not experience the same level of degradation.

Overtime, LEDs can experience some level of color shift. This is caused in large part by the degradation of the phosphor that sits directly on the LED due to heat coming directly off the LED.

HIGH EFFICIENCY

With the remote phosphor lens, we do not need a secondary diffusing lens. This helps us achieve greater lumens per watt.

In order to minimize glare created by individual LEDs, most traditional products utilize a diffusing lens. This typically creates an efficiency loss of 15% to 35%. In fixtures without a diffusing lens, high efficiency is sometimes achieved at the cost of significant glare.



UNILUME GIVES CONSISTENT, EVEN ILLUMINATION



TYPICAL LED SYSTEMS




UNILUME ELIMINATES DISTRACTING 'MULTI-SHADOWS' IN RETAIL



TYPICAL LED SYSTEMS



UNILUME ELIMINATES DISTRACTING 'MULTI-SHADOWS' IN TASK

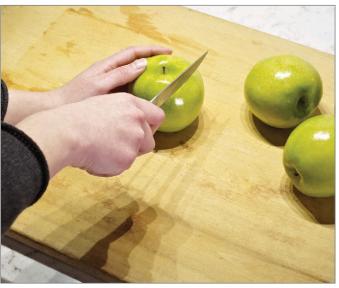


TYPICAL LED SYSTEMS

JUMPER CONNECTION PORTS
ARE LOCATED ON EACH END
OF THE HOUSING
(SHOWN WITHOUT FINISHING CAP)




AVAILABLE SIZES

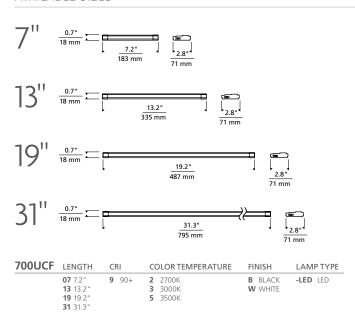

TECHNICAL SPECIFICATIONS

	7" LENGTH	13" LENGTH	19" LENGTH	31" LENGTH
SYSTEM POWER	4.0 watts	8.5 watts	10.5 watts	18.0 watts
SYSTEM EFFICACY	60 lms / watt	62 lms / watt	66 lms / watt	68 lms / watt
LUMENS	240	527	693	1224
COLOR TEMPERATURES	2700K, 3000K, 3500K	2700K, 3000K, 3500K	2700K, 3000K, 3500K	2700K, 3000K, 3500K
COLOR RENDERING INDEX	90+	90+	90+	90+
POWER FACTOR	0.94	0.94	0.94	0.94
INPUT POWER	120V	120V	120V	120V
DIMMING	To 5%-15% Depending on Dimmer			
WARRANTY	5 years	5 years	5 years	5 years

UNILUME LED SLIMLINE SYSTEM OVERVIEW

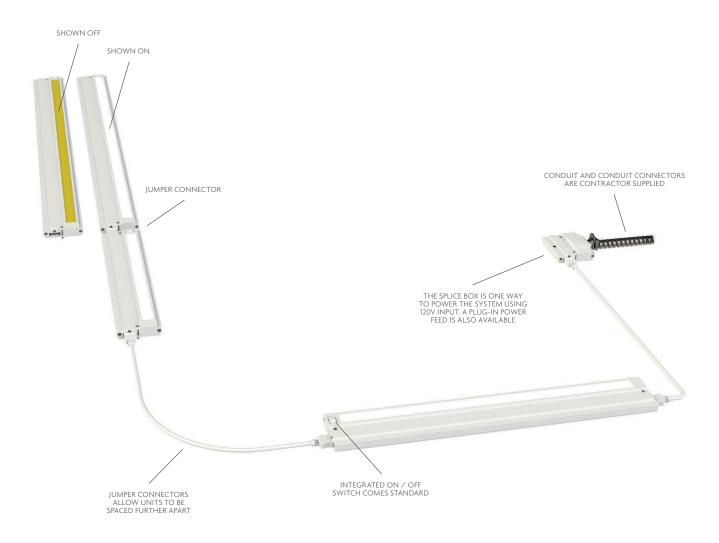







SLIMLINE DUAL SPLICE BOX

For use with Unilume Slimline in \nearrow out hardwire applications. The 1" Jumper Connector can be used for installation next to a Slimline Housing, while longer Jumper Connectors can be used to place the Splice Box in a more remote location. Includes (2) Romex 1/2 inch conduit connectors.





700UCSBE FINISH


B BLACK W WHITE

UNILUME LEDT SLIMLINE ACCESSORIES

SPLICE BOX

Required for hardwire applications. Conduit is fed into the back and Jumper Connector ports on each side can feed power to Unilume LED Slimline runs in two directions. The 1" Jumper Connector can be used to place the Splice Box next to the Undercabinet Housing. Longer Jumper Connectors can be used to place the Splice Box in a more convenient or remote location. Includes 3/8" conduit connector.





JUMPER CONNECTORS

Can be used to link one Unilume LED Slimline fixture to another or to a Splice Box. The maximum wattage for a single run is 600 watts. Use with the Female to Female Connector to create longer spaces between fixtures. Nominal length.

700UCJC	LENGTH	FINISH
	01 1.5"	B BLACK
	03 3.3"	W WHITE
	06 5.8"	
	12 12.0"	
	24 24 0"	



PLUG-IN POWER FEED

Can be used to plug one Unilume LED Slimline fixture directly into a wall power outlet. Use in combination with Jumper Connectors to extend power to a longer run. Nominal length.

700UCPL	LENGTH	FINISH
	24 24"	B BLACK W WHITE



T-CONNECTOR

Can be used to join three Unilume LED Slimline Jumper Connectors together to split an existing run into two additional directions.

700UCTC	FINISH		
	B BLACK W WHITE		



FEMALE TO FEMALE CONNECTOR


Can be used to join two Jumper Connectors together to create even longer spaces between Unilume LED Slimline fixtures.








UNILUME LED DIRECT WIRE SYSTEM OVERVIEW

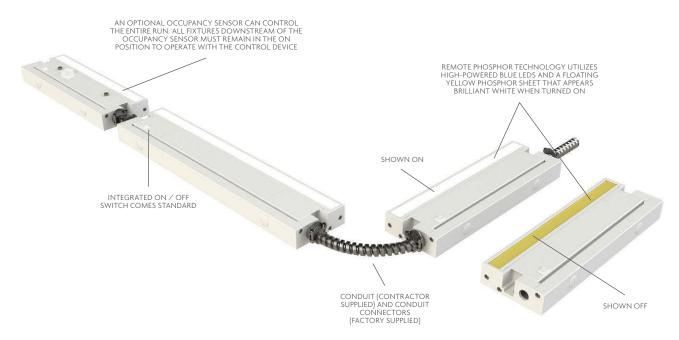





AVAILABLE SIZES

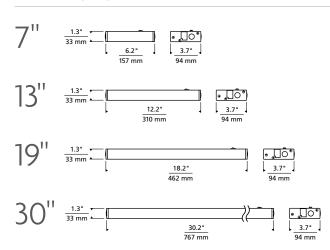

700UCFDW	LENGTH	CRI	COLOR TEMPERATURE	FINISH	LAMP TYPE	OCCUPANCY SENSOR
	07 6.2" 13 12.2" 19 18.2" 30 30.2"	9 90+	2 2700K 3 3000K 5 3500K	B BLACK W WHITE	-LED LED	NONE -OCS WITH OCCUPANCY SENSOR*

^{*} INTEGRATED OCCUPANCY SENSOR ONLY AVAILABLE ON 13", 19" AND 30"

TECHNICAL SPECIFICATIONS

	7" LENGTH	13" LENGTH	19" LENGTH	30" LENGTH
SYSTEM POWER	4.0 watts	8.5 watts	10.5 watts	18.0 watts
SYSTEM EFFICACY	60 lms / watt	62 lms / watt	66 lms / watt	68 lms / watt
LUMENS	240	527	693	1224
COLOR TEMPERATURES	2700K, 3000K, 3500K	2700K, 3000K, 3500K	2700K, 3000K, 3500K	2700K, 3000K, 3500K
COLOR RENDERING INDEX	90+	90+	90+	90+
POWER FACTOR	0.94	0.94	0.94	0.94
INPUT POWER	120V	120V	120V	120V
DIMMING	To 5%-15% Depending on Dimmer			
WARRANTY	5 years	5 years	5 years	5 years


For undercabinet, task, display and cove applications where space is limited but performance is crucial, Unilume LED Light Bar offers the best combination of compact size, performance and versatility. Unilume LED Light Bar's ultra slim housing design and unique snap-together connectors allow for twenty feet of uninterrupted, uniform light without the use of wire jumpers. With three convenient lengths, three color temperature options, two finish colors and several accessories; customizing a Unilume LED Light Bar for one-of-a-kind applications is easy.








AVAILABLE SIZES

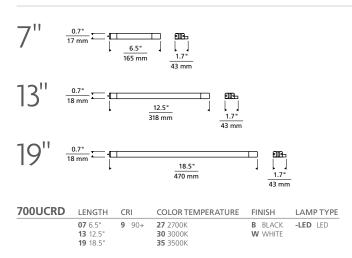

TECHNICAL SPECIFICATIONS

	7" LENGTH	13" LENGTH	19" LENGTH
SYSTEM POWER	4.0 watts	7.0 watts	9.0 watts
SYSTEM EFFICACY	76 lms / watt	78 lms / watt	81 lms / watt
LUMENS	307	549	729
COLOR TEMPERATURES	2700K, 3000K, 3500K	2700K, 3000K, 3500K	2700K, 3000K, 3500K
COLOR RENDERING INDEX	90+	90+	90+
POWER FACTOR	0.95	0.95	0.95
INPUT POWER	24V DC	24V DC	24V DC
DIMMING	To 5%-15% Depending on Dimmer	To 5%-15% Depending on Dimmer	To 5%-15% Depending on Dimmer
WARRANTY	5 years	5 years	5 years

UNILUME LED LIGHT BAR SYSTEM OVERVIEW

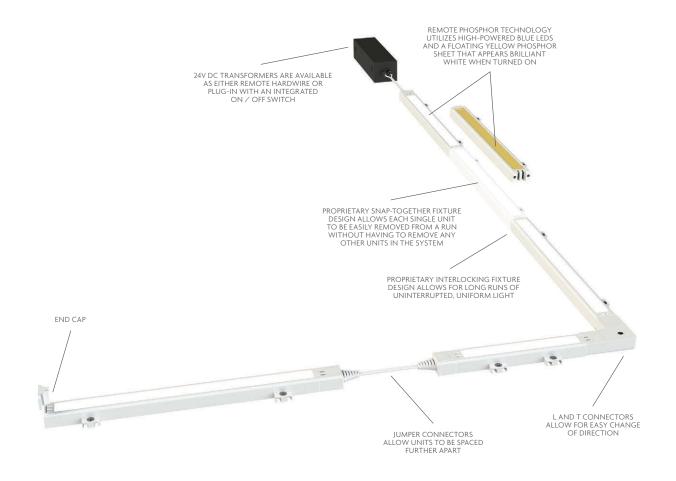

ANGLED MOUNTING BRACKETS

Mounting brackets available in 30° and 45° to direct the light exactly where you need it.



UNILUME LED LIGHT BAR SYSTEM OVERVIEW

Optional accessory designed to seamlessly integrate with any Unilume Light Bar system for complete dimming control. Controls all downstream Light Bar fixtures – install nearest to the remote transformer for total system control.

FINISH

700UCRDDIM

B BLACK
W WHITE

LIGHT BAR
IN-LINE DIMMER

LIGHT BAR IN-LINE SWITCH

Optional accessory designed to seamlessly integrate with any Unilume Light Bar system for complete on/off power control. Controls all downstream Light Bar fixtures — install nearest to the remote transformer for total system control.

700UCRDMSW

FINISH

B BLACK
W WHITE

LIGHT BAR
IN-LINE SWITCH

LIGHT BAR IN-LINE OCCUPANCY SENSOR

Optional accessory designed to seamlessly integrate with any Unilume Light Bar system for occupancy-based power control. Controls all downstream Light Bar fixtures – install nearest to the remote transformer for total system control.

700UCRDOCS FINISH

B BLACK W WHITE

LIGHT BAR IN-LINE OCCUPANCY SENSOR

UNILUME LED LIGHT BAR ACCESSORIES

REMOTE TRANSFORMERS

Whether hardwired to a junction box or plugged into a wall outlet, Unilume LED Light Bar offers a broad selection of remote transformers to power the system. At least one transformer is required to provide power to a system run.

TRANSFORMER	INPUT VOLTAGE OUTPUT VOLTAGE WATTAGE TYPE	ITEM NUMBER	COMPATIBLE DIMMER TYPE	MOUNTING TYPE	NOTES
2" 51 mm 1.7" 43 mm 1 8.1" 207 mm	1 X 120V 24V DC 1 X 60 WATTS NO LOAD ELECTRONIC DC	700AT0624EL	LOW-VOLTAGE ELECTRONIC 450 WATTS	REMOTE	
3.5° 89 mm 2" 50 mm 1 8.5° 216 mm	1 X 120V 24V DC 1 X 150 WATTS NO LOAD ELECTRONIC DC	700AT1524EL	LOW-VOLTAGE ELECTRONIC 600 WATTS	REMOTE	
1.9" 50 mm 2.2" 54.96 mm 1.4" 35.96 mm	1 X 120V 24V DC 1 X 30 WATTS NO LOAD ELECTRONIC DC PLUG-IN	BLACK: 700AT0324ELPB WHITE: 700AT0324ELPW	LOW-VOLTAGE ELECTRONIC 450 WATTS	WALL PLUG-IN	3 PRONG PLUG: INCLUDES THE TRANSFORMER 3' OF LEADS FOR CONNECTION ON / SWITCH
1.9" 50 mm 2.2" 54.96 mm 35.96 mm	1 X 120V 24V DC 1 X 60 WATTS NO LOAD ELECTRONIC DC PLUG-IN	BLACK: 700AT0624ELPB WHITE: 700AT0624ELPW	LOW-VOLTAGE ELECTRONIC 450 WATTS	WALL PLUG-IN	3 PRONG PLUG: INCLUDES THE TRANSFORMER 3' OF LEADS FOR CONNECTION ON / SWITCH

POWER FEED CABLE

Required to get power from the transformer to the Unilume LED Light Bar system. Compatible with all hardwire and plug-in transformers. Nominal length.





L CONNECTOR

Can be used to join two Unilume LED Light Bar fixtures or Jumper Connectors together while forming a 90 degree angle.

700UCRDLC	FINISH	
	B BLACK W WHITE	



JUMPER CONNECTORS

Can be used to link one Unilume LED Light Bar fixture to another when spacing between fixtures is needed. Nominal length.

W WHITE

700UCRDJC	LENGTH	FINISH
	06 6"	B BLACK
	12 12"	W WHITE
	24 24"	



T CONNECTOR


Can be used to join three Unilume LED Light Bar fixtures or Jumper Connectors together to split an existing run into two additional directions.

700UCRDTC	FIN	NISH
	_	BLACK WHITE



ANGLED MOUNTING BRACKETS


hardware to mount Unilume LED Light Bar fixtures at either 30 or 45 degree angles to create the desired lighting effect (set of two).



700UCRDJC	ANGLE	FI	NISH
	30 30° ANGLED	В	BLACK


MOUNTING BRACKETS W WHITE MOUNTING BRACKETS

Unilume LED Micro Channel was specifically developed for applications where custom length, end-to-end illumination is crucial. Combining on-site length customization with ultra slim housing design and superior light performance makes the Unilume Micro Channel one of the most uniqueLED products available. The special co-extruded remote phosphor mixing channel provides a sleek profile while providing impressive general illumination. As an added benefit, it also creates a clean, white look even when turned off. Available in 300 lumens per foot and 600 lumens per foot.

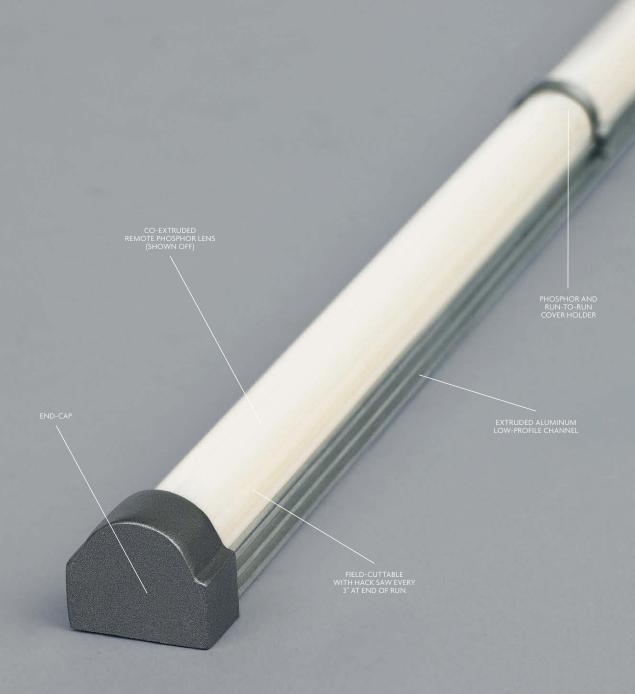




AVAILABLE SIZES

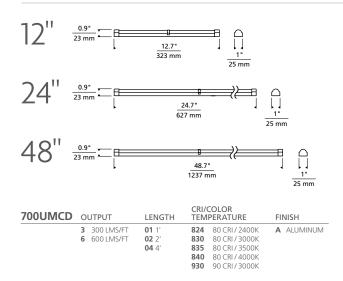

TECHNICAL SPECIFICATIONS

	12" LENGTH	24" LENGTH	48" LENGTH
SYSTEM POWER	3.2 watts (300 lms / ft) 6.4 watts (600 lms / ft)	6.4 watts (300 lms / ft) 12.8 watts (600 lms / ft)	12.8 watts (300 lms / ft) 25.6 watts (600 lms / ft)
SYSTEM EFFICACY	95 lms / watt	95 lms / watt	95 lms / watt
LUMENS	300 (300 lms / ft) 600 (600 lms / ft)	600 (300 lms / ft) 1,200 (600 lms / ft)	1,200 (300 lms / ft) 2,400 (600 lms / ft)
COLOR TEMPERATURES	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K
COLOR RENDERING INDEX	80+, 90+ (3000K only)	80+, 90+ (3000K only)	80+, 90+ (3000K only)
POWER FACTOR	0.95	0.95	0.95
INPUT POWER	24V DC	24V DC	24V DC
DIMMING	To 5%-15% Depending on Dimmer	To 5%-15% Depending on Dimmer	To 5%-15% Depending on Dimmer
WARRANTY	5 years	5 years	5 years

UNILUME LED MICRO CHANNEL SYSTEM OVERVIEW

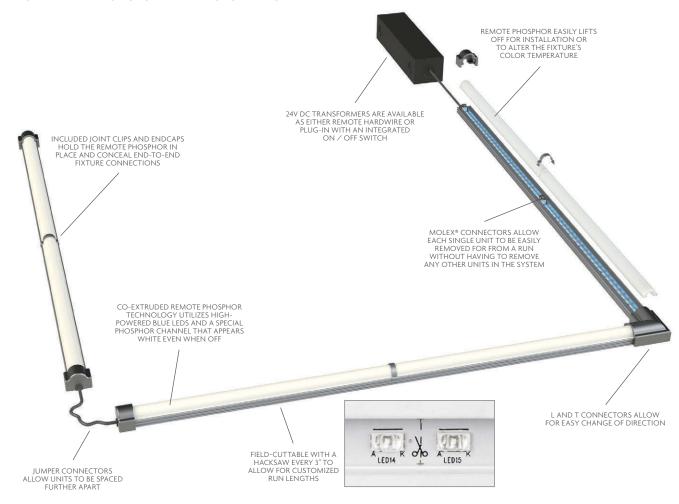




ANGLED MOUNTING BRACKETS



Can be used in place of provided mounting hardware to mount Unilume LED Micro Channel fixtures at either 30, 45 or 90 degree angles to create the desired lighting effect. Come in a set of 4 brackets to be used every 2' in a system run.

700UMCMB	ANGLE	FINISH			
	30 30° ANGLED MOUNTING BRACKETS 45 45° ANGLED MOUNTING BRACKETS	A	ALUMINUM		
	90 90° ANGLED MOUNTING BRACKETS				

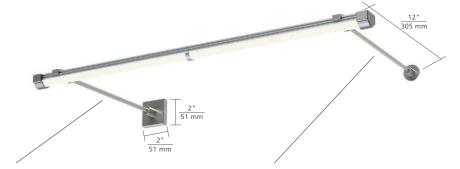

CANTILEVER POWERFEED

For display, wall graze and general illumination applications, this accessory is used to provide power from a remote transformer (sold separately) to a Unilume LED Micro Channel system while being mounted directly to an existing J-Box (4" Canopy) or available with factory supplied 2" Square Canopy and J-Box. The 12" stem is field-cuttable for custom installations and must be used in combination with cantilever standoffs at 2' increments. Mounting hardware included.

700UMCP	C	ANOPY	MOUNTING FINISH		NISH	
	2	2" CANOPY AND J-BOX	ORG12	CANTILEVER 12"	Α	ALUMINUM
	4	4" CANOPY				

CANTILEVER STANDOFF

For use in display, wall graze and general illumination applications. The 12" stem extends Micro Channel off the wall and is field-cuttable for custom installations and must be used every 2' in a run for proper system support. Mounting hardware included.

700UMCS	MOUNT	ING	FINISH		
	ORG12	CANTILEVER	Α	ALUMINUN	

UNILUME LED MICRO CHANNEL ACCESSORIES

REMOTE TRANSFORMERS

Whether hardwired to a junction box or plugged into a wall outlet, Unilume LED Micro Channel offers a broad selection of remote transformers to power the system. At least one transformer is required to provide power to a system run.

Transformer	INPUT VOLTAGE OUTPUT VOLTAGE WATTAGE TYPE	ITEM NUMBER	COMPATIBLE DIMMER TYPE	MOUNTING TYPE	NOTES
2" 51 mm 1.7" 43 mm 1.8.1" 207 mm	1 X 120V 24V DC 1 X 60 WATTS NO LOAD ELECTRONIC DC	700AT0624EL	LOW-VOLTAGE ELECTRONIC 450 WATTS	REMOTE	
3.5° 89 mm 2" 50 mm 1 8.5° 216 mm	1 X 120V 24V DC 1 X 150 WATTS NO LOAD ELECTRONIC DC	700AT1524EL	LOW-VOLTAGE ELECTRONIC 600 WATTS	REMOTE	
1.9" 50 mm 2.2" 54.96 mm 1.4" 35.96 mm	1 X 120V 24V DC 1 X 30 WATTS NO LOAD ELECTRONIC DC PLUG-IN	BLACK: 700AT0324ELPB WHITE: 700AT0324ELPW	LOW-VOLTAGE ELECTRONIC 450 WATTS	WALL PLUG-IN	3 PRONG PLUG: INCLUDES THE TRANSFORMER 3' OF LEADS FOR CONNECTION ON / SWITCH
1.9" 50 mm 2.2" 54.96 mm 1.4" 35.96 mm	1 X 120V 24V DC 1 X 60 WATTS NO LOAD ELECTRONIC DC PLUG-IN	BLACK: 700AT0624ELPB WHITE: 700AT0624ELPW	LOW-VOLTAGE ELECTRONIC 450 WATTS	WALL PLUG-IN	3 PRONG PLUG: INCLUDES THE TRANSFORMER 3' OF LEADS FOR CONNECTION ON / SWITCH

POWER FEED CABLE

Required to get power from the transformer to the Unilume LED Micro Channel system. Nominal length.



700UMCPF	LENGTH	FINISH
	06 6'	A ALUMINUM

L CONNECTOR

Can be used to join two Unilume LED Micro Channel fixtures or Jumper Connectors together while forming a 90 degree angle.




700UMCLC	
	A ALUMINUM

JUMPER CONNECTORS

Can be used to link one Unilume LED Micro Channel fixture to another to extend runs or change directions. Use 1" Jumper Connector to connect fixtures end-to-end. 3"-24" Jumper Connectors include additional power feed endcap. Use with the Female to Female Connector to create even longer spaces between fixtures or contact our Quotes Department for custom lengths. Nominal length.

> 03 3" **12** 12"



A ALUMINUM

T CONNECTOR

Can be used to join three Unilume LED Micro Channel fixtures or Jumper Connectors together to split an existing run into two additional directions.



700UMCTC	FINISH
	Δ ΔΙΙΙΜΙΝΙΙΙΜ

FEMALE TO FEMALE CONNECTOR Can be used to join two Jumper Connectors 700UMCJC LENGTH FINISH

together to create longer spaces between Unilume LED Micro Channel fixtures.





ACCENT & TASK







	ITEM #	description	VOLTS	WATTS	LAMP SHAPE	BASE TYPE	BEAM SPREAD	COLOR TEMP (K)	CRI	CENTER BEAM CANDLE POWER	INITIAL LUMENS	RATED AVG LIFE
) LT INCA alogen Bi-Pin	NDESCENT LAMPS										
=	300BLV034	12v Hal T3 G4 20w Bi-pin CL	12	20	Т3	G4	N/A	3000	100	N/A	320	2,000
	300BLV026	12v Hal T4 GY6.35 35w Bi-pin CL	12	35	T4	GY6.35	N/A	3000	100	N/A	600	2,000
	300BLV035	12v Hal T3 GY6.35 50w Bi-pin CL	12	50	T4	GY6.35	N/A	3000	100	N/A	930	2,000
	300BLV037	12v Hal T3 GY6.35 50w Bi-pin FR	12	50	T4	GY6.35	N/A	3000	100	N/A	930	2,000
12 Volt X	enon Bi-Pin									,		
=	300BLV030	12v Xenon T3 G4 5w Bi-pin	12	5	Т3	G4	N/A	2800	100	N/A	60	10,000
	300BLV032	12v Xenon T3 G4 10w Bi-pin	12	10	T3	G4	N/A	2800	100	N/A	125	10,000
	300BLV031	12V Xenon T3 G4 15w Bi-pin	12	15	T3	G4	N/A	2800	100	N/A	180	10,000
	300BLV025	12v Xenon T3 G4 20w Bi-pin	12	20	Т3	G4	N/A	2800	100	N/A	250	10,000
	300BLV359	12v Xenon T4 GY6.35 35w Bi-pin	12	35	T4	GY6.35	N/A	2900	100	N/A	525	10,000
	300BLV461	12v Xenon T4 GY6.35 50w Bi-pin	12	50	T4	GY6.35	N/A	2900	100	N/A	750	10,000
	300BLV462	12v Xenon T4 GY6.35 50w Bi-pin Frs	12	50	T4	GY6.35	N/A	2900	100	N/A	750	10,000
12 Volt M	IR16											
=1	300BLV129	12v Hal MR16 GU5.3 12° 20w	12	20	MR16	GU5.3	12	2950	100	3,500	N/A	5,000
	300BLV128	12v Hal MR16 GU5.3 36° 20w	12	20	MR16	GU5.3	36	2950	100	600	N/A	5,000
	300BLV102	12v Hal MR16 GU5.3 24° 35w	12	35	MR16	GU5.3	24	2950	100	2,300	N/A	5,000
	300BLV105	12v Hal MR16 GU5.3 36° 35w	12	35	MR16	GU5.3	36	2950	100	1,300	N/A	5,000
	300BLV132	12v Hal MR16 GU5.3 12° 50w	12	50	MR16	GU5.3	12	3000	100	11,000	N/A	5,000
	300BLV133	12v Hal MR16 GU5.3 24° 50w	12	50	MR16	GU5.3	24	3000	100	3,600	N/A	5,000
	300BLV131	12v Hal MR16 GU5.3 36° 50w	12	50	MR16	GU5.3	36	3000	100	2,000	N/A	5,000
	300BLV110	12v Hal MR16 GU5.3 60° 50w	12	50	MR16	GU5.3	60	3000	100	850	N/A	5,000
	300BLV112	12v Hal MR16 GU5.3 12° 75w	12	75	MR16	GU5.3	12	3000	100	13,000	N/A	5,000
	300BLV115	12v Hal MR16 GU5.3 24° 75w	12	75	MR16	GU5.3	24	3000	100	4,800	N/A	5,000
	300BLV116	12v Hal MR16 GU5.3 36° 75w	12	75	MR16	GU5.3	36	3000	100	2,700	N/A	5,000
12 Volt M	IR16 GE Consta	nt Color										
	300BLV129	12v Hal MR16 GU5.3 12° 20w	12	20	MR16	GU5.3	12	2950	100	3,500	N/A	5,000
4	300BLV128	12v Hal MR16 GU5.3 36° 20w	12	20	MR16	GU5.3	36	2950	100	600	N/A	5,000
	300BLV102	12v Hal MR16 GU5.3 24° 35w	12	35	MR16	GU5.3	24	2950	100	2,300	N/A	5,000
	300BLV105	12v Hal MR16 GU5.3 36° 35w	12	35	MR16	GU5.3	36	2950	100	1,300	N/A	5,000
	300BLV132	12v Hal MR16 GU5.3 12° 50w	12	50	MR16	GU5.3	12	3000	100	11,000	N/A	6,000
	300BLV133	12v Hal MR16 GU5.3 24° 50w	12	50	MR16	GU5.3	24	3000	100	3,600	N/A	6,000
	300BLV131	12v Hal MR16 GU5.3 36° 50w	12	50	MR16	GU5.3	36	3000	100	2,000	N/A	6,000
	300BLV110	12v Hal MR16 GU5.3 60° 50w	12	50	MR16	GU5.3	60	3000	100	850	N/A	6,000
	300BLV112	12v Hal MR16 GU5.3 12° 75w	12	75	MR16	GU5.3	12	3000	100	13,000	N/A	4,000
12 Volt M	MR16 IR											
/	300BLV254	12v IR MR16 GU5.3 10° 37w	12	37	MR16	GU5.3	10	3000	100	12,500	N/A	5,000
=	300BLV255	12v IR MR16 GU5.3 25° 37w	12	37	MR16	GU5.3	25	3000	100	4,400	N/A	5,000
	300BLV256	12v IR MR16 GU5.3 35° 37w	12	37	MR16	GU5.3	35	3000	100	2,200	N/A	5,000
12 Volt M	1R16 10,000 Hou	ur										
	300BLV411	12v MR16 GU5.3 24° 50w	12	50	MR16	GU5.3	24	3100	100	2,700	N/A	10,000
#	300BLV410	12v MR16 GU5.3 36° 50w	12	50	MR16	GU5.3	36	3100	100	1,500	N/A	10,000
12 Volt M	IR16 Aluminized											
	300BLV412	12v Sld Bk MR16 GU5.3 12° 50w alu	12	50	MR16	GU5.3	12	3000	100	11,000	N/A	3,500
	300BLV413	12v Sld Bk MR16 GU5.3 24° 50w alu	12	50	MR16	GU5.3	24	3000	100	3,600	N/A	3,500
	300BLV414	12v Sld Bk MR16 GU5.3 36° 50w alu	12	50	MR16	GU5.3	36	3000	100	2,000	N/A	3,500
		1 222 20 30 4 44				1 - 5.5				,		.,

	ITEM #	description	VOLTS	WATTS	LAMP SHAPE	BASE TYPE	BEAM SPREAD	COLOR TEMP (K)	CRI	CENTER BEAM CANDLE POWER	INITIAL LUMENS	RATED AVG LIFE
		NDESCENT LAMPS (CON	tinued)									
12 Volt N	AR16 Solid Back 300BLV144	12v Sld Bk MR16 GU5.3 24° 50w blk	12	50	MR16	GU5.3	24	3000	100	3,000	N/A	3,500
=	300BLV144	12v Sld Bk MR16 GU5.3 36° 50w blk	12	50	MR16	GU5.3	36	3000	100	1,580	N/A	3,500
•	300BLV146	12v Sld Bk MR16 GU5.3 24° 50w sil	12	50	MR16	GU5.3	24	3000	100	3,000	N/A	3,500
	300BLV147	12v Sld Bk MR16 GU5.3 36° 50w sil	12	50	MR16	GU5.3	36	3000	100	1,580	N/A	3,500
12 Vol+ F	rost Line									,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		.,
12 VO((1 1 1	300BLV415	12v Frostline MR16 GU5.3 20w	12	20	MR16	GU5.3	N/A	2900	100	N/A	N/A	4,000
24 Volt I	Halogen Bi-Pin	NDESCENT LAMPS										
	300BLV350	24v Hal T3 G4 20w Bi-pin	24	20	T3	G4	N/A	N/A	100	N/A	N/A	2,000
	300BLV351	24v Hal T4 GY6.35 35w Bi-pin	24	35	T4	GY6.35	N/A	N/A	100	N/A	N/A	2,000
	300BLV352	24v Hal T4 GY6.35 50w Bi-pin	24	50	T4	GY6.35	N/A	N/A	100	N/A	N/A	2,000
	Kenon Bi-Pin	T	1			1						I
	300BLV356	24v Xenon T3 G4 5w Bi-pin	24	5	T3	G4	N/A	2800	100	N/A	55	10,000
	300BLV357	24v Xenon T3 G4 10w Bi-pin	24	10	T3	G4	N/A	2800	100	N/A	125	10,000
	300BLV358	24v Xenon T3 G4 20w Bi-pin	24	20	T3	G4	N/A	2800	100	N/A	250	10,000
	300BLV360	24v Xenon T4 G4 35w Bi-pin	24	35	T4	GY6.35	N/A	2900	100	N/A	525	10,000
	300BLV463	24v Xenon T4 G4 50w Bi-pin	24	50	T4	GY6.35	N/A	2900	100	N/A	750	10,000
24 Volt I		I									1	
	300BLV301	24v Hal MR16 GU5.3 12° 50w	24	50	MR16	GU5.3	12	2950	100	7,000	N/A	4,000
\triangleleft	300BLV302	24v Hal MR16 GU5.3 24° 50w	24	50	MR16	GU5.3	24	2950	100	2,900	N/A	4,000
	300BLV303	24v Hal MR16 GU5.3 36° 50w	24	50	MR16	GU5.3	36	2950	100	1,600	N/A	4,000
4 Volt I	MR16 GE Consta											1
	300BLV306	24v GE CC. Hal MR16 GU5.3 40° 35w	24	35	MR16	GU5.3	40	2950	100	920	N/A	4,000
\neg	300BLV307	24v GE CC. Hal MR16 GU5.3 15° 50w	24	50	MR16	GU5.3	15	2950	100	8,400	N/A	4,000
	300BLV308	24v GE CC. Hal MR16 GU5.3 40° 50w	24	50	MR16	GU5.3	40	2950	100	1,570	N/A	4,000
\sim	A-Lamp Incande		1									1
	300BHV478	24v A19 E26 Med 60w Cl.	24	60	A19	E26 Med	N/A	2700	100	N/A	790	2,500
	OLT INC	ANDESCENT LAMPS										
	300BHV392	120v A21 E26 Med 150w Wh.	120	150	A21	E26 Med	N/A	2700	100	N/A	2,780	750
A-Lamp	Halogen											
	300BHV505	120v A19 E26 Med 43w Wh.	120	43	A19	E26 Med	N/A	2900	100	N/A	620	1,000
\sim	300BHV502	120v A19 E26 Med 43w Cl.	120	43	A19	E26 Med	N/A	2900	100	N/A	800	1,000
	300BHV500	120v A19 E26 Med 53w Wh.	120	53	A19	E26 Med	N/A	2950	100	N/A	1,050	1,000
	300BHV509	120v A19 E26 Med 53w Cl.	120	53	A19	E26 Med	N/A	2950	100	N/A	1,050	1,000
	300BHV486	120v A19 E26 Med 72w Wh.	120	72	A19	E26 Med	N/A	3000	100	N/A	1,270	1,000
3T15 Lan	np Halogen											
	300BHV504	120v BT15 E26 Med 43w WH	120	43	BT15	E26 Med	N/A	2900	100	N/A	750	1,000

	ITEM #	DESCRIPTION	VOLTS	WATTS	LAMP SHAPE	BASE TYPE	BEAM SPREAD	COLOR TEMP (K)	CRI	CENTER BEAM CANDLE POWER	INITIAL LUMENS	RATED AVG LIFE
		ANDESCENT LAMPS (CONTI	nued)									
	300BHV389	120v EDISON A19 E26 Med 40w Cl.	120	40	A19 EDISON	E26 Med	N/A	2700	N/A	N/A	118	3,000
	300BHV466	120v EDISON A19 E26 Med 60w Cl.	120	60	A19 EDISON	E26 Med	N/A	2700	N/A	N/A	500	2,500
Classic E	dison Style Saui	irrel Cage Incandescent										
	300BHV480	120v Squirrel Cage S21 E26 Med 60w Cl. 120	120	60	S21 Sqrl Cage	E26 Med	N/A	2700	N/A	N/A	100	3,000
	300BHV508	120v Squirrel Cage S21 E26 Med 60w Sm. 120	120	60	S21 Sqrl Cage	E26 Med	N/A	2700	N/A	N/A	200	3,000
Classic E	dison Style T9 I	ncandescent										
	300BHV473	120v Edison T9 E26 Med 30w Cl.	120	30	T9 EDISON	E26 Med	N/A	2700	N/A	N/A	N/A	3,000
Medium	Globe Incandes	scent										
	300BHV487	120v G40 E26 Med 60w Cl.	120	60	G40	E26 Med	N/A	2700	100	N/A	565	2,500
	300BHV485	120v G40 E26 Med 60w Half Chrome	120	60	G40	E26 Med	N/A	2700	100	N/A	565	1,500
	300BHV507	120v G25 E26 Med 40w Half Gold	120	40	G25	E26 Med	N/A	2700	100	N/A	565	1,500
	300BHV122	120v G40 E26 Med 150w WH	120	150	G40	E26 Med	N/A	2700	100	N/A	1,770	2,500
Medium	T8 Incandescen	nt										
	300BHV126	120v T8 E26 Med 75w Fr.	120	60	Т8	E26 Med	N/A	2700	100	N/A	874	2,000
Medium	9 Incandescent											
	300BHV127	120v T9 E26 Med 40w Fr.	120	40	T10	E26 Med	N/A	2850	100	N/A	325	2,500
	300BHV128	120v T9 E26 Med 60w Fr.	120	60	T10	E26 Med	N/A	2850	100	N/A	600	1,000
Mini-Can	delabra Krypto	n / Halogen										
	300BHV153	120v T3 E11 Mini-can. 40w Cl. Kry	120	40	T3	E11 Mini- Cand.	N/A	2800	100	N/A	560	2,000
	300BHV439	120v T3 E11 Mini-can. 60w Cl. Kry	120	60	T3	E11 Mini- Cand.	N/A	2800	100	N/A	960	2,000
	300BHV150	120v T4 E11 Mini-can. 75w Cl. Hal	120	75	T4	E11 Mini- Cand.	N/A	2850	100	N/A	1,125	1,000
	300BHV151	120v T4 E11 Mini-can. 100w Cl. Hal	120	100	T4	Ell Mini- Cand. Ell Mini-	N/A	2850	100	N/A	1,600	1,000
	300BHV152	120v T4 E11 Mini-can. 150w Cl. Hal	120	150	T4	Cand.	N/A	2900	100	N/A	2,800	2,000
Double-E	Inded Halogen						1				1	
	300BHV443	120v T3 R7S 100w 118 mm	120	100	Т3	RS7	N/A	2950	100	N/A	1,650	2,000
	Halogen											
\Longrightarrow	300BHV361	120v Hal G9 bi-pin T4 40w Fr.	120	40	T4	G9 Bi-Pin	N/A	2900	100	N/A	480	2,000
	300BHV364	120v Hal G9 bi-pin T4 60w Fr.	120	60	T4	G9 Bi-Pin	N/A	2900	100	N/A	790	2,000
_	J10 Halogen										1	
	300BHV411	120v Hal PAR16 GU10 40° 50w	120	50	PAR16	GU10	40	2950	100	400	640	2,000
PAR20 H		700 11 101000 50711 170000	12.0	20			10	2050	100	3.700	475	1500
	300BHV495	120v Hal PAR20 E26 Med 10° 39w	120	39	PAR20	E26 Med	10	2850	100	3,700	475	1,500
	300BHV496	120v Hal PAR20 E26 Med 30° 39w	120	39	PAR20	E26 Med	30	2850	100	1,000	475	1,500
PAR30 Sl	nort Halogen	T										
	300BHV418	120v Hal PAR30 E26 Med 9° 50w	120	50	PAR30	E26 Med	9	2950	100	8,800	660	2,500
4	300BHV419	120v Hal PAR30 E26 Med 25° 50w	120	50	PAR30	E26 Med	25	2950	100	2,300	660	2,500
	300BHV420	120v Hal PAR30 E26 Med 40° 50w	120	50	PAR30	E26 Med	40	2950	100	1,300	660	2,500
- 4	ong Halogen	T			I						1	
	300BHV424	120v Hal PAR30L E26 Med 9° 50w	120	50	PAR30LN	E26 Med	9	2950	100	8,800	660	2,500
v	300BHV425	120v Hal PAR30L E26 Med 25° 50w	120	50	PAR30LN	E26 Med	25	2950	100	2,300	660	2,500
	300BHV503	120v Hal PAR30L/IR E26 Med 50° 50w	120	50	PAR30LN	E26 Med	50	2850	100	1,000	850	3,000
	300BHV499	120v Hal PAR30L/IR E26 Med 10° 60w	120	60	PAR30LN	E26 Med	10	2850	100	12,300	1,100	3,000

	ITEM #	description	VOLTS	WATTS	LAMP SHAPE	BASE TYPE	BEAM SPREAD	COLOR TEMP (K)	CRI	CENTER BEAM CANDLE POWER	INITIAL LUMENS	RATED AVG LIFE
	120 VOLT INCANDESCENT LAMPS (CONTINUED) PAR38 Halogen											
	300BHV430	120v Hal PAR38 E26 Med 9° 60w	120	60	PAR38	E26 Med	9	2950	100	16,000	850	3,000
	300BHV431	120v Hal PAR38 E26 Med 30° 60w	120	60	PAR38	E26 Med	30	2950	100	2,500	850	3,000
	300BHV432	120v Hal PAR38 E26 Med 9° 90w	120	90	PAR38	E26 Med	9	2950	100	19,000	1,310	2,500
	300BHV433	120v Hal PAR38 E26 Med 30° 90w	120	90	PAR38	E26 Med	30	2950	100	3,500	1,310	2,500
	300BHV434	120v Hal PAR38 E26 Med 50° 90w	120	90	PAR38	E26 Med	50	2950	100	1,600	1,310	2,500
	300BHV435	120v Hal PAR38 E26 Med 10° 120w	120	120	PAR38	E26 Med	10	2950	100	22,500	1,800	3,000
	300BHV436	120v Hal PAR38 E26 Med 30° 120w	120	120	PAR38	E26 Med	30	2950	100	4,600	1,800	3,000
	300BHV437	120v Hal PAR38 E26 Med 55° 120w	120	120	PAR38	E26 Med	55	2950	100	2,000	1,800	3,000
	RESCEN											
	300BHV388	Flr 2G7 Twin Tube 7w	N/A	7	CFL Twin	2G7	N/A	2700	82	N/A	400	10,000
	300BHV454	Flr 2G7 Twin Tube 9w	N/A	9	CFL Twin	2G7	N/A	2700	82	N/A	580	10,000
	300BHV367	Flr 2GX7 Twin Tube 13w	N/A	13	CFL Twin	2GX7	N/A	2700	82	N/A	800	10,000
	300BHV387	Flr 2G11 Twin Tube 18w	N/A	18	CFL Twin	2G11	N/A	3000	82	N/A	1,200	12,000
	300BHV381	Flr 2G11 Twin Tube 36w	N/A	36	CFL Twin	2G11	N/A	3000	82	N/A	2,900	12,000
Compac	Fluorescent Tr	iple Tube										
4	300BHV370	Flr GX24Q-1 Triple Tube 13w	N/A	13	CFL Triple	GX24Q-1	N/A	2700	82	N/A	900	12,000
	300BHV371	Flr GX24Q-2 Triple Tube 18w	N/A	18	CFL Triple	GX24Q-2	N/A	2700	82	N/A	1,200	12,000
	300BHV378	Flr GX24Q-3 Triple Tube 26w	N/A	26	CFL Triple	GX24Q-3	N/A	2700	82	N/A	1,800	12,000
	300BHV386	Flr GX24Q-3 Triple Tube 32w	N/A	32	CFL Triple	GX24Q-3	N/A	2700	82	N/A	2,328	12,000
Linear Fl	uorescent											
	300BHV369	Flr T5 Mini Bi-Pin 14w 22"	N/A	14	T5	Mini Bi-Pin	N/A	3000	82	N/A	1,350	20,000

300BHV382

300BHV467

300BHV468

Flr T5HO Mini Bi-Pin 24w 22"

Flr T5HO Mini-Bi-Pin 39w 34"

Flr T5HO Mini-Bi-Pin 54w 46"

N/A

N/A

N/A

24

39

54

T5 HO

T5 HO

Т5 НО

Mini Bi-Pin

Mini Bi-Pin

Mini Bi-Pin N/A

N/A

N/A

3000

3000

3000

82

85

N/A

N/A

N/A

2,000

3,100


4,450

20,000

20,000

25,000

	ITEM #	description	VOLTS	WATTS	LAMP SHAPE	BASE TYPE	BEAM SPREAD	COLOR TEMP (K)	CRI	CENTER BEAM CANDLE POWER	INITIAL LUMENS	RATED AVG LIFE
<u>1</u> 120 √	OLT LED F	REPLACEMENT LAMPS	S									
~	Replacement				ı					ı		
	300BHV512	120v Philips Warm Glow LED A19 11w	120	11	LED A19	E26 Med	N/A	2700- 2200	80	N/A	800	25,000
T24	300BHV531	120v MaxLite LED A19 9.5w	120	9.5	LED A19	E26 Med	N/A	2700	90	N/A	800	25,000
_	Replacement											
	300BHV501	120v Philips LED A21 19w	120	19	LED A21	E26 Med	N/A	2700	80	N/A	1680	25,000
T24	300BHV525	120v MaxLite LED A21 17w	120	17	LED A21	E26 Med	N/A	2700	80	N/A	1680	25,000
1	Replacement											
	300BHV489	120v Philips LED PAR20 8w 25°	120	8	LED PAR20	E26 Med	25°	3000	85	2,400	470	45,000
T24	300BHV526	120v SORAA LED PAR20 11w 25°	120	11	LED PAR20	E26 Med	25°	3000	95	N/A	550	25,000
	300BHV492	120v Philips LED PAR30L 25°	120	12	LED PAR30L	E26 Med	25°	3000	80	5,300	900	50,000
LED T14 I	Radio Replacemen	t										
	300BHV519	120v Archipelago LED T14 Vintage Radio 3.5w	120	3.5	LED T14	E26 Med	N/A	2200	90	N/A	300	25,000
T24	300BHV520	120v Archipelago LED T14 Vintage Radio 3.5w	120	3.5	LED T14	E26 Med	N/A	2700	90	N/A	350	25,000
LED T6 T	ubular Replaceme	nt										
	300BHV521	120v Archipelago LED T6 V intage Tubular 2w	120	2	LED T6	E12	N/A	2200	90	N/A	160	25,000
T24	300BHV522	120v Archipelago LED T6 Vintage Tubular 2w	120	2	LED T6	E12	N/A	2700	90	N/A	200	25,000
LED S21 S	Squirrel Cage Repla	acement										
	300BHV523	120v Archipelago LED S21 Vintage Squirrel Cage 3.5w	120	3.5	LED ST19	E26 Med	N/A	2200	90	N/A	300	25,000
T24	300BHV524	120v Archipelago LED S21 Vintage Squirrel Cage 3.5w	120	3.5	LED ST19	E26 Med	N/A	2700	90	N/A	350	25,000
LED Glob	oe Replacement											
	300BHV515	120v MaxLite LED G40 14w	120	14	LED G40	E26 Med	N/A	3000	82	N/A	1300	25,000
LED BT15	Replacement											
	300BHV530	120v SATCO LED BT15 6.5w	120	14	LED G40	E26 Med	N/A	3000	82	N/A	1300	25,000
	OLT LED LA ED Bi-Pin Replacen	MPS AND MODULES										
12 YUIL L	351LEDBIPN927	12v SORAA LED Bi-Pin Module 8w 2700K	12	8	LED Bi-Pin	GU5.3 Bi-Pin	N/A	2700	95	N/A	375	35,000
	351LEDBIPN930	12v SORAA LED Bi-Pin Module 8w 3000K	12	8	LED Bi-Pin	GU5.3 Bi-Pin	N/A	3000	95	N/A	500	35,000
12 Volt I	ED MR16 Replacen			l .	I	1	I		I	I	1	1
T24	300BLV451	12v SORAA LED MR16 6w 2700K 25°	12	6	LED MR16	GU5.3 Bi-Pin	25°	2700	95	1600	290	25,000
T24	300BLV453	12v SORAA LED MR16 6w 3000K 25°	12	6	LED MR16	GU5.3 Bi-Pin	25°	2700	95	1710	310	25,000
T24	300BLV454	12v SORAA LED MR16 6w 3000K 36°	12	6	LED MR16	GU5.3 Bi-Pin	36°	3000	95	1810	310	25,000
	300BLV455	12v Lighting Science Difinity LED MR16 8w 2700K 25°	12	8	LED MR16	GU5.3 Bi-Pin	25°	2700	83	2323	470	25,000
	300BLV456	12v Lighting Science Difinity LED MR16 8w 3000K 25°	12	8	LED MR16	GU5.3 Bi-Pin	25°	3000	83	2323	500	25,000
	300BLV457	12v Lighting Science Difinity LED MR16 8w 2700K 40°	12	8	LED MR16	GU5.3 Bi-Pin	40°	2700	83	1147	470	25,000
	300BLV458	12v Lighting Science Difinity LED MR16 8w 3000K 40°	12	8	LED MR16	GU5.3 Bi-Pin	40°	3000	83	1147	500	25,000

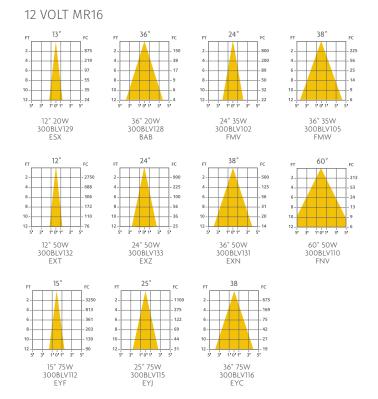

A Aiming angle of fixture, measured from 0° DH Vertical distance from fixture to

horizontal surface

DW Distance from fixture to wall

FC Footcandles at beam center X Vertical distance from beam center to ceiling

L Length of beamW Width of beamCBCP Centerbeam Candlepower



0° Horizontal









				0°	Н	ORIZO	NTAL :	SURFAC 30°	ES		0°					VERTIC 30°	CAL SU	JRFAC	ES	60°			
FIXTURE	LAMP TYPE /	BEAM SPREAD	СВСР	DH	FC	L	W			١٨/	DW	FC	X	,	W			١,	W	FC		Ι.	W
USAGE	PART NUMBER	DEAM SPREAD	СВСР	νп	FC	L	٧٧	FC	L	W	DVV	FC	^	L	VV	FC	X	L	VV	rC	X	L	l vv
INCAN	DESCENT PAR	LAMPS																					
Om Sportster	PAR16 GU10	40°	800	8	13	5.8	5.8	8	8.1	6.7	4	6			5.8	18	4.0	6.7	4.1	32	2.3		
Tweak	300BHV411			10	8	7.3	7.3	5	10.2	8.4	6	3	10.4			8	6.0	10.1	6.2	14	3.5	6.1	_
	Ä			12	6	10.2	10.2	3	12.2	10.0	10	2		38.7 48.3		3	8.0	13.4	10.3	5	4.6 5.8	10.2	
				16	3	11.6	11.6	2	16.2	13.4	12	1	20.8			2	12.0			4	6.9	12.2	_
Om	PAR30 SHORT	9°	8,800	8	138	1.3	1.3	89	1.7	1.5	4	69	6.9	2.6	1.3	194	4.0	1.3	0.9	357	2.3	0.8	0.7
Sportster Spot	50w 9° 300BHV418			10	88	1.6	1.6	57	2.1	1.8	6	31	10.4	3.8	1.9	86	6.0	1.9	1.3	159	3.5	1.3	1.1
Tweak	A			12	61	1.9	1.9	40	2.5	2.2	8	17	13.9	5.1	2.5	49	8.0	2.5	1.8	89	4.6	1.7	
	\hookrightarrow			14	45	2.2	2.2	29	2.9	2.5	10	11	17.3	6.4	3.1	31	10.0	_	2.2	57	5.8	2.1	_
				16	34		2.5	22	3.4	2.9	12	8	20.8		3.8	22	12.0		2.7	40	6.9	2.5	_
	PAR30 SHORT 50w 25°	25°	2,300	8	36	3.5	3.5	23	4.8	4.0	4	18	6.9	8.3		51	4.0		2.5	93	2.3	2.4	
	300BHV419			10	23 16	5.3	5.3	15	7.2	5.1 6.1	8	8	10.4	12.5		13	8.0	7.5	5.0	23	3.5 4.6	3.6 4.8	_
				14	12	6.2	6.2	8	8.4	7.2	10	3		20.8		8	10.0		6.3	15	5.8	6.0	
				16	9	7.1	7.1	6	9.6	8.2	12	2			10.6	6	12.0	_	7.5	10	6.9	7.2	_
	PAR30 SHORT	40°	1,300	10	20	5.8	5.8	13	8.1	6.7	4	10	6.9	19.3	5.8	29	4.0	6.7	4.1	53	2.3	4.1	3.4
	50w 40°	<u> </u>		12	13	7.3	7.3	8	10.2	8.4	6	5	10.4	29.0	8.7	13	6.0	10.1	6.2	23	3.5	6.1	5.0
	300BHV420			14	9	8.7	8.7	6	12.2	10.0	8	3	13.9	38.7	11.6	7	8.0	13.4	8.2	13	4.6	8.1	6.7
				16	7	10.2	10.2	4	14.2	11.8	10	2	17.3	48.3	14.6	5	10.0	16.8	10.3	8	5.8	10.2	8.4
				18	5	11.6	11.6	3	16.2	13.4	12	1	20.8	58.0	17.5	3	12.0	20.1	12.4	6	6.9	12.2	10.1
	PAR30 LONG	9°	0.000	Τ,	120	1.2	1.2	00	1.7	1.5	4	(0	(0	2.6	12	10.4	140	1.2		257	2.2		0.7
Om Sportster		9	8,800	10	138	1.3	1.3	89 57	2.1	1.5	6	69 31	6.9	3.8	1.3	194	4.0	1.3	0.9	357 159	2.3	0.8	
Tweak	300BHV424			12	61	1.9	1.9	40	2.5	2.2	8	17	13.9	5.1	2.5	49	8.0	_	1.8	89	4.6	1.7	_
	Ā			14	45	2.2	2.2	29	2.9	2.5	10	11	17.3	6.4	3.1	31	10.0	3.2	2.2	57	5.8	2.1	1.8
		_		16	34	2.5	2.5	22	3.4	2.9	12	8	20.8	7.7	3.8	22	12.0	3.8	2.7	40	6.9	2.5	2.2
	PAR30 LONG	25°	2,300	8	36	3.5	3.5	23	4.8	4.0	4	18	6.9	8.3	3.5	51	4.0	3.7	2.5	93	2.3	2.4	2.0
	50w 25° 300BHV425	<u> </u>		10	23	4.4	4.4	15	6.0	5.1	6	8	10.4	12.5	5.3	23	6.0	5.6	3.8	41	3.5	3.6	3.1
	A			12	16	5.3	5.3	10	7.2	6.1	8	4		16.6		13	8.0	7.5	5.0	23	4.6	4.8	
	\triangle			14	12	6.2	6.2	8	8.4	7.2	10	2		20.8		8	10.0	_	6.3	15	5.8	6.0	_
				16	9	7.1	7.1	6	9.6	8.2	12		20.8	25.0	10.6	6	12.0	11.2	7.5	10	6.9	7.2	6.1
Sportster	PAR38 60w 9°	9°	16,000	8	250	1.3	1.3	162	1.7	1.5	4	125	6.9	2.6	1.3	354	4.0	1.3	0.9	650	2.3	0.8	0.7
Tweak	300BHV430		.,	10	160		1.6	104		1.6	6	56	10.4			157		1.9	1.3		3.5		
	A			12	111	1.9	1.9	72	2.5	1.9	8	31	13.9	5.1	2.5	88	8.0	2.5	1.8	162	4.6	1.7	1.5
				14	82	2.2	2.2	53	2.9	2.2	10	20	17.3			57	_	3.2	2.2		5.8		_
				16	63	2.5	2.5	41	3.4	2.5	12	14	20.8	7.7	3.8	39	12.0	3.8	2.7	72	6.9	2.5	2.2
	PAR38 60w 30°	30°	2,500	8	39	4.3	4.3	25	5.9	5.0	4	20		10.9		55	_	4.6	3.0	101		2.9	
	300BHV431 且			10	25	5.4	5.4	16	7.3	6.2	6	9	10.4			25	_	6.9	4.5	45	3.5		_
	A			12	17	6.4	6.4	11	8.8	7.4	8	5	13.9	21.9	8.6	14	8.0	9.2	6.1	25	4.6	5.9	5.0
				14	13	7.5	7.5	8	10.2	8.7	10	3	17.3	27.3	10.7	9	10.0	11.5	7.6	16	5.8	7.3	6.2

Aiming angle of fixture, measured from 0° Vertical distance from fixture to horizontal surface Distance from fixture to wall Footcandles at beam center Vertical distance from beam center to ceiling A DH

DW FC X

L W Length of beam Width of beam Centerbeam Candlepower CBCP











				HORIZONTAL SURFACES			VERTICAL SURFACES															
				0°				30°			0°					30°			60°			
FIXTURE USAGE	LAMP TYPE / PART NUMBER	BEAM SPREAD	СВСР	DH	FC	L	W	FC	L	W	DW	FC	х	L	W	FC	х	L W	FC	Х	L	W
INCAN	DESCENT PAR	LAMPS (CONTI	nued)																			
	PAR38 90w 9°	9°	22,000	8	347	1.3	1.3	225	1.7	1.5	4	173	6.9	2.6	1.3	491	4.0	1.3 0.9	901	2.3	0.8	0.7
Tweak	300BHV432 ■			10	222		1.6	144	2.1	1.8	6	77	10.4	3.8	1.9	218		1.9 1.3	401	3.5	1.3	1.1
	A			12	154		1.9	100		2.2	8	43	13.9	5.1	2.5	123		2.5 1.8	225		1.7	1.5
				14	113 87		2.2	74 56	3.4	2.5	10	28 19	17.3 20.8	6.4 7.7	3.1	78 55	10.0		144	5.8 6.9		1.8
				10	07	2.3	2.3	30	3.4	2.7	12	17			3.0	33	12.0	3.0 2.7] [100	_		
	PAR38 90w 30° 300BHV433	30°	3,500	8	55		4.3	36	5.9	5.0	4	27	6.9	10.9	4.3	77	4.0	4.6 3.0	142	2.3	2.9	2.5
	300BHV433			10	35		5.4	23	7.3	6.2	6	12	10.4	16.4	6.4	34	6.0	6.9 4.5	63	3.5	4.4	3.7
	A			12	24		6.4	16	8.8	7.4	8	7	13.9	21.9	8.6	19	8.0	9.2 6.1	36	4.6		
				14	18		7.5 8.6	12	10.2	9.9	10	3	17.3 20.8		10.7	12		11.5 7.6 13.9 9.1	16	5.8 6.9	7.3	7.4
				10	14	0.0	0.0	2	11.7	7.7	12)	20.0	32.0	12.7	2	12.0	13.7 7.1		0.7	0.0	7.4
	PAR38 90w 50° 300BHV434	50°	1,600	8	25		7.5	16	-	8.7	4	13	6.9	42.9	7.5	35	4.0	9.5 5.3	65	2.3	5.4	
	300BHV434			10	16		9.3	10	-	10.7	6	6	10.4		11.2	16		14.3 7.9	29	3.5	8.0	
	A			12	11		11.2	7		12.9	8	3			14.9	9		19.1 10.6	16	4.6	10.7	
				14	8		13.1	5		15.1	10	2		107.3		6	10.0		10	5.8	13.4	
				16	6	14.9 1	4.9	4	21.5	17.2	12	1	20.8	128.8	22.4	4	12.0	28.6 15.8		6.9	16.1	12.9
	PAR38 120w 10°	10°	22,500	8	352		1.4	228	1.9	1.6	4	176	6.9	2.9	1.4	497		1.4 1.0	913	2.3	0.9	0.8
	300BHV435			10	225		1.7	146		2.0	6	78	10.4	4.3	2.1	221		2.1 1.5		3.5	1.4	1.2
	A			12	156		2.1	101		2.4	8	44	13.9	5.7	2.8	124		2.8 2.0	228			1.6
				14	115		2.4	75	3.3	2.8	10	28	17.3	7.2	3.5	80	10.0		146	5.8	2.3	2.0
				16	88	2.8	2.8	57	3.7	3.2	12	20	20.8	8.6	4.2	55	12.0	4.2 3.0	101	6.9	2.8	2.4
	PAR38 120w 30°	25°	4,600	8	72	4.3	4.3	47	5.9	5.0	4	36	6.9	10.9	4.3	102	4.0	4.6 3.0	187	2.3	2.9	2.5
	300BHV436			10	46	5.4	5.4	30		6.2	6	16	10.4	16.4	6.4	45	6.0	6.9 4.5	83	3.5	_	3.7
	A			12	32		6.4	21	8.8	7.4	8	9	13.9	21.9	8.6	25	8.0	9.2 6.1	47	4.6		5.0
				14	23		7.5	15		8.7	10	6	17.3		10.7	16		11.5 7.6	30	5.8	_	6.2
				16	18	8.6	8.6	12	11.7	9.9	12	4	20.8	32.8	12.9		12.0	13.9 9.1	21	6.9	8.8	7.4
	PAR38 120w 55°	40°	2,000	8	31	8.3	8.3	20	12.2	9.6	4	16	6.9	89.1	8.3	44	4.0	11.4 5.9	81	2.3	6.1	4.8
	300BHV437			10	20	10.4 1	0.4	13	15.3	12.0	6	7	10.4	133.6	12.5	20	6.0	17.1 8.8	36	3.5	9.2	7.2
	Ā			12	14		2.5	9		14.4	8	4			16.7	11		22.9 11.8	20	4.6		
	\hookrightarrow			14	10		4.6	7		16.9	10	3		222.7		7		28.6 14.7	13	5.8		12.0
				16	8	16.7 1	6.7	5	24.4	19.3	12	2	20.8	267.2	25.0	5	12.0	34.3 17.7	9	6.9	18.3	14.4











FIXTURE	PAGE	SECTION	FIXTURE	PAGE	SECTION
90	379	Ceiling	Bristol	115	Pendants
360	379	Ceiling	Brummel	44	Pendants
2" Square Canopy	594	Heads & Display	Brummel Grande	46	Pendants
2" Square Flush Canopy	312	Chandeliers	Burk	542	Heads & Display
3 And 5-Port Canopies	304	Chandeliers	Cabo	252	Pendants
3 And 5-Port Round Canopies	305	Chandeliers	Café	404	Wall & Bath
· · · · · · · · · · · · · · · · · · ·		Chandeliers			
3-Port Linear Canopy	305		Cam	555	Heads & Display
4" Round Canopy	594	Heads & Display	Canopy Goof Ring	304	Chandeliers
4" Round Flush Canopy	312	Chandeliers	Canopy Goof Ring	588	Heads & Display
4" Round Swivel Canopy	594	Heads & Display	Casen Drum	362	Ceiling
4" Square Flush Canopy	312	Chandeliers	Caspian Grande	164	Pendants
4-Port Round Canopy	305	Chandeliers	Centric	358	Ceiling
4-Port Square Canopy	305	Chandeliers	Chambers	382	Ceiling
Adera	435	Wall & Bath	Cheers	202	Pendants
Admiral Simple	506	Wall & Bath	Chelsea	521	Wall & Bath
Aero	550	Heads & Display	Circulet	82	Pendants
Akimbo	324	Linear Suspension	Circulet Grande	82	Pendants
Akova	402	Wall & Bath	Cirque	372	Ceiling
Akova	89	Pendants	Cirque	457	Wall & Bath
Akova	360	Ceiling	Clark	387	Ceiling
Alden	480	Wall & Bath	Clark	249	Pendants
Alina	124	Pendants	Cleo	158	Pendants
Alina Grande	126	Pendants	Clifton	502	Wall & Bath
Alva	105	Pendants	Coda	100	Pendants
Alva Multi-Port	264	Chandeliers	Cone	247	Pendants
Ambist	381	Ceiling	Cone Glass Shield	589	Heads & Display
Amira	96	Pendants	Cone Onyx Shield	589	Heads & Display
	286	Chandeliers	Connector Ports	594	
Aragon			Coronado		Heads & Display
Arris	432	Wall & Bath		518	Wall & Bath
Artic	150	Pendants	Corum	172	Pendants
Artic Grande	152	Pendants	Corva Bath	482	Wall & Bath
Artic Grande	280	Chandeliers	Corva	481	Wall & Bath
Audra	84	Pendants	Cosmo	462	Wall & Bath
Audra Grande	86	Pendants	Cosmo 12/18	460	Outdoor
Ava	122	Pendants	CP Cord Extender	595	Heads & Display
Avery	123	Pendants	CP1 Clamp-On Light	595	Heads & Display
Backlight Shield	592	Heads & Display	Crescendo	294	Chandeliers
Barndoors	593	Heads & Display	Crossroads	322	Linear Suspension
Basis	434	Wall & Bath	Crossroads	182	Pendants
Baxter	386	Ceiling	Crossroads	485	Wall & Bath
Beacon	212	Pendants	Cube	250	Pendants
Bell	591	Heads & Display	Cube	496	Wall & Bath
Belladonna	591	Heads & Display	Devin	74	Pendants
Bespin	368	Ceiling	Dillon	244	Pendants
Billow	130	Pendants	Diz	254	Pendants
Biz	255	Pendants	DJ Screw-on	594	Heads & Display
Biza	336	Linear Suspension	DJ-Archie	594	Heads & Display
Biza Mechanical Connector	336	Linear Suspension	DJ-Georgi	594	Heads & Display
Blok	54	Pendants	DJ Screw-on	594	Heads & Display
Bodiam	284	Chandeliers	DJ-Telescope	594	Heads & Display
Boreal	232	Pendants	DJ-Vally Lite	594	Heads & Display
			,		
Boreal	522	Wall & Bath	Dobson	60	Pendants
Borrego	224	Pendants	Dobson	318	Linear Suspension
Bowman 4	426	Wall & Bath	Dobson	403	Wall & Bath
Bowman 6	426	Wall & Bath	Dobson Grande	62	Pendants
Boxie	374	Ceiling	Ebb	420	Wall & Bath
Boxie	1	Wall & Bath	Echo	208	Pendants
DOME	458	VVall & Datii			
Boxie Ceiling	458 458	Ceiling	Echo	514	Wall & Bath
				514 210	Wall & Bath Pendants

FIXTURE	PAGE	SECTION	FIXTURE	PAGE	SECTION
Eggcrate Louver	593	Heads & Display	Inner Fire	218	Pendants
Elton	558	Heads & Display	Inner World	160	Pendants
Ensu	498	Wall & Bath	Iridium	96	Pendants
Envision	580	Heads & Display	Isella	120	Pendants
Eros Line-Voltage	113	Pendants	ISO	548	Heads & Display
Eros Low-Voltage	113	Pendants	Istra	489	Wall & Bath
Escher	354	Ceiling	Jaxon Bath	497	Wall & Bath
Essex	230	Pendants	Jaxon	510	Wall & Bath
Essex	520	Wall & Bath	Jayden	495	Wall & Bath
Ехо	52	Pendants	Jayden Grande	198	Pendants
Ехо	344	Ceiling	John	556	Heads & Display
Exo Dual	346	Ceiling	Jorn	340	Linear Suspension
Fab	242	Pendants	Joshua & Meg Picture Lights	596	Heads & Display
Fett	396	Wall & Bath	Joshua 2" Canopy	595	Heads & Display
Fett	36	Pendants	Joshua 4" Round Flush Canopy	595	Heads & Display
Fett	359	Ceiling	Kable Lite Adapter	313	Chandeliers
Fiama	277	Chandeliers	KableLite	618-623	
Fiama Candle Accessory	277	Chandeliers	Kalido	367	Ceiling
Finch	370	Ceiling	Karam	380	Ceiling
Finch Float	371	Ceiling	Karam	66	Pendants
Finn	468	Wall & Bath	Kata	349	Ceiling
Finn 24/36	470	Wall & Bath	K-Bye-Bye	575	Heads & Display
Fino Large	189	Pendants	K-Corum	573	Heads & Display
Fino Small	188	Pendants	K-Hello	572	Heads & Display
Fire	214	Pendants	Kiev	140	Pendants
Fire Grande	216	Pendants		140	Pendants
	220	Pendants	Kiev Large	509	Wall & Bath
Firebird			Kisdon		
Firefrit	221	Pendants	K-Jane	576	Heads & Display
Firefrost	219	Pendants	K-Lev	538	Heads & Display
Flight paper	591	Heads & Display	Knox	332	Linear Suspension
Fluid Round	376	Ceiling	Knox Mechanical Connector	332	Linear Suspension
Fluid Square	378	Ceiling	Konial 17	430	Outdoor
Fokis	537	Heads & Display	Konial 5	428	Outdoor
Folium	169	Pendants	Konos	42	Pendants
FreeJack Hardware	310-313	Chandeliers	K-Pivot	574	Heads & Display
Fuse	476	Wall & Bath	K-Rae	570	Heads & Display
Gage 8/15/20	410	Outdoor	K-Telescope	577	Heads & Display
Gambit	258	Chandeliers	Lance	352	Ceiling
Gambit Multi-Port	260	Chandeliers	Larkspur	516	Wall & Bath
Gambit Single	400	Wall & Bath	Leev	417	Outdoor
Gambit Triple	400	Wall & Bath	Lev	539	Heads & Display
Gatica	316	Linear Suspension	Lexington	240	Pendants
Gia	338	Linear Suspension	Lexington	519	Wall & Bath
Gia Bath Bar	450	Wall & Bath	Lil Big Wonder	596	Heads & Display
Gia Mirror Kit	525	Wall & Bath	Lil Wok Shade	592	Heads & Display
Gia Vanity Kit	527	Wall & Bath	Lil Wonder	596	Heads & Display
Gunnar	40	Pendants	Line-Voltage Pendant Track Adapters	304	Chandeliers
Halo	442	Wall & Bath	Line-Voltage Port Alone	304	Chandeliers
Harper	118	Pendants	Line-Voltage Swag Hook	588	Heads & Display
Helios	566	Heads & Display	Line-Voltage Swag Hook	304	Chandeliers
Henley	72	Pendants	Liza	192	Pendants
Henrik	144	Pendants	Liza Grande	194	Pendants
Henrik Grande	145	Pendants	Locus Accessory	108	Pendants
Hudson	225	Pendants	Locus Accessory	266	Chandeliers
Hudson	508	Wall & Bath	Low- & Line-Voltage 11-Port Round Canopy	306	Chandeliers
Hutch	38	Pendants	Low- & Line-Voltage 3-Port Linear Canopy	306	Chandeliers
Hutch	347	Ceiling	Low- & Line-Voltage 7-Port Rectangular Canopy	306	Chandeliers
	114	Pendants	Low-Voltage Swag Hook	305	Chandeliers
Hybris					
Hybris IBISS	546	Heads & Display	Luna	478	Wall & Bath

FIXTURE	PAGE	SECTION	FIXTURE	PAGE	SECTION
1, 6, 12, 70	442	Outdoor	Professional de	121	Don donte
Lyft 12/18	443	Outdoor	Parfum Grande	121	Pendants
Lynn	472	Wall & Bath	Patrona	290	Chandeliers
Mali	163	Pendants	Pelé	204	Pendants
Manchon	200	Pendants	Peyton	226	Pendants
Manette	361	Ceiling	Pinnacle	183	Pendants
Manette	136	Pendants	Piper	178	Pendants
Manette Grande	137	Pendants	Piper Grande	178	Pendants
Mara	94	Pendants	Pitch	422	Wall & Bath
Mara	272	Chandeliers	Playa Line-Voltage	228	Pendants
Mara Grande	270	Chandeliers	Playa Low-Voltage	228	Pendants
Masque	170	Pendants	Playa	512	Wall & Bath
Masque Grande	171	Pendants	Playa Flush	512	Wall & Bath
Matan	397	Wall & Bath	Port Alone	312	Chandeliers
Matan	348	Ceiling	Port With Canopy	312	Chandeliers
Matan Grande	56	Pendants	Powell Street	156	Pendants
Matan	56	Pendants	Prescott	119	Pendants
Meeka	201	Pendants	Prism Glass Shield	590	Heads & Display
Megan	351	Ceiling	Projekt	174	Pendants
Melrose II Line-Voltage	133	Pendants	Quinton	116	Pendants
Melrose II Low-Voltage	132	Pendants	Rae	571	Heads & Display
Melrose II Grande	134	Pendants	Rae	337	Linear Suspension
Mercer	300	Chandeliers	Rae Bath Bar	448	Wall & Bath
Metro	464	Wall & Bath	Rae Mirror Kit	525	Wall & Bath
				-	Wall & Bath
Metro Long	466	Wall & Bath	Rae Vanity Kit	527	
Mina	104	Pendants	Recessed Can Adapter	313	Chandeliers
Mina Multi-Port	262	Chandeliers	Reece	88	Pendants
Mini Cargo Solid	176	Pendants	Reflection Mirror	530	Wall & Bath
Mini Crescendo	295	Chandeliers	Refuge Round	394	Wall & Bath
Mini Dillon	243	Pendants	Refuge Square	395	Wall & Bath
Mini Echo	206	Pendants	Render	536	Heads & Display
Mini Ella	92	Pendants	Revel	320	Linear Suspension
Mini Hudson	225	Pendants	Revel	180	Pendants
Mini Larkspur	253	Pendants	Revel	487	Wall & Bath
Mini Larkspur	516	Wall & Bath	Revel Linear	486	Wall & Bath
Mini Melrose II	132	Pendants	Revere	138	Pendants
Mini Mulberry	234	Pendants	Rhonan	68	Pendants
Mini Om	564	Heads & Display	Rhonan	356	Ceiling
Mini Ryker	146	Pendants	Rhonan Grande	70	Pendants
Mona Lisa Picture Light	597	Heads & Display	Roto	544	Heads & Display
MonoRail	600-605		Round Glass Shield	589	Heads & Display
MonoRail FreeJack Connector	313	Chandeliers	Ryker	147	Pendants
MO-Pivot	568	Heads & Display	Sage	452	Wall & Bath
Morrison	490	Wall & Bath	Sara	196	Pendants
Moxy	112	Pendants	Sara	494	Wall & Bath
MR16 Snoot	593	Heads & Display	Sara Double	492	Wall & Bath
Mulberry	382		Sara Grande	196	Pendants
		Ceiling		_	
Mulberry	236	Pendants	Scania	562	Heads & Display
Multi-port Chandeliers	302-313	Chandeliers	Sedona	90	Pendants
Mura	445	Wall & Bath	Sedona	399	Wall & Bath
Nebbia	222	Pendants	Sedona	268	Chandeliers
Oak Park	248	Pendants	Sedona Grande	91	Pendants
OM Incandescent PAR	582	Heads & Display	Sedona	269	Chandeliers
Otto	246	Pendants	Selina	128	Pendants
Palestra	80	Pendants	Siber Mirror	528	Wall & Bath
Palona	78	Pendants	Siena	500	Wall & Bath
PAR Louver Lens Holder	583	Heads & Display	Snap Louver Lens Holder	592	Heads & Display
Parallax	330	Linear Suspension	SoCo	106-107	Pendants
T WI WI WA					
Paravo	34	Pendants	Soda	223	Pendants

FIXTURE	PAGE	SECTION
Solace	474	Wall & Bath
Soleil	166	Pendants
Soleil Grande	167	Pendants
Solitude	251	Pendants
Span	446	Wall & Bath
Sportster	561	Heads & Display
Sportster Incandescent PAR	584	Heads & Display
Spot	560	Heads & Display
Spot Incandescent PAR	586	Heads & Display
Sprocket	554	Heads & Display
'	95	Pendants
Spur		
Spur	273	Chandeliers
Spur Grande	274	Chandeliers
Staccato	296	Chandeliers
Stealth	545	Heads & Display
Stratos	398	Wall & Bath
Stratos	282	Chandeliers
Stratton	76	Pendants
Summit	184	Pendants
Summit Grande	184	Pendants
Surface Canopy	312	Chandeliers
Surge	326	Linear Suspension
Surge L Connector	326	Linear Suspension
	326	
Surge Linear Connector		Linear Suspension
Syrma	48	Pendants
Syrma Grande	50	Pendants
Syrma Grande	278	Chandeliers
T~TRAK FreeJack Connector	313	Chandeliers
Taag 10	416	Outdoor
Taag 6	414	Outdoor
Talisma	98	Pendants
Tegan	350	Ceiling
Tegel 12/18	412	Outdoor
Tele	569	Heads & Display
Tellium	548	Heads & Display
Tetra	205	Pendants
Tibor	168	Pendants
Tirfin	436	Wall & Bath
Tigris Mirror Oval	530	Wall & Bath
Tigris Mirror Round	532	Wall & Bath
Tilt	552	Heads & Display
Tinkerbell Shade With Integrated Lens Holder	590	Heads & Display
Торо	384	Ceiling
Topo Line-Voltage	238	Pendants
Topo Low-Voltage	238	Pendants
Torpedo	255	Pendants
Trace	298	Chandeliers
Trace	388	Ceiling
Trace Semi-Flushmount	388	Ceiling
	313	Chandeliers
Track Adapter		
T-Trak		Systems
Turbo	392	Outdoor
Tweak Incandescent PAR	583	Heads & Display
Two-Circuit MonoRail	606-611	Systems
Two-Circuit MonoRail FreeJack Connector	313	Chandeliers
Unilume LED Light Bar In-Line Dimmer	646	Accent & Task
Unilume LED Direct Wire	642-643	Accent & Task
Unilume LED Light Bar		Accent & Task
	3017	

FIXTURE	PAGE	SECTION
Unilume LED Light Bar In-Line Switch	646	Accent & Task
Unilume LED Light Bar Jumper Connector	647	Accent & Task
Unilume LED Light Bar L Connector	647	Accent & Task
Unilume LED Light Bar Power Feed Cable	647	Accent & Task
Unilume LED Light Bar T Connector	647	Accent & Task
Unilume LED Micro Channel	648-651	Accent & Task
Unilume LED Micro Channel Angled Mounting Bracket	650	Accent & Task
Unilume LED Micro Channel Cantilever Power Feed	650	Accent & Task
Unilume LED Micro Channel Cantilever Standoff	650	Accent & Task
Unilume LED Micro Channel Female To Female Connector	651	Accent & Task
Unilume LED Micro Channel Jumper Connector	651	Accent & Task
Unilume LED Micro Channel L Connector	651	Accent & Task
Unilume LED Micro Channel Power Feed Cable	651	Accent & Task
Unilume LED Micro Channel T Connector	651	Accent & Task
Unilume LED Slimline	638-641	Accent & Task
Unilume LED Slimline Dual Splice Box	640	Accent & Task
Unilume LED Slimline Female To Female Connector	641	Accent & Task
Unilume LED Slimline Jumper Connectors	641	Accent & Task
Unilume LED Slimline Plug-In Power Feed	641	Accent & Task
Unilume LED Slimline Splice Box	641	Accent & Task
Unilume LED Slimline T Connector	641	Accent & Task
Unison	341	Linear Suspension
Unison Mechanical Connector	341	Linear Suspension
Vance	353	Ceiling
Vandor	323	Linear Suspension
Vandor Mechanical Connector	323	Linear Suspension
Vane	58	Pendants
Vane Grande	59	Pendants
Veil	227	Pendants
Ventana	488	Wall & Bath
Voss	438	Wall & Bath
Voto	406	Wall & Bath
Voto 6	407	Outdoor
Voto 8	408	Outdoor
Wall MonoRail	612-617	
Wall Archie	578	Heads & Display
Wall Georgi	578	Heads & Display
Wall MonoRail FreeJack Connector	313	Chandeliers
Wall Telescope	579	Heads & Display
Wally Lite	579	Heads & Display
Windrush	444	Wall & Bath
Windsor Line-Voltage	64	Pendants
Windsor Low-Voltage	65	Pendants
World	162	Pendants
Wynter Linear	454	Wall & Bath
Wynter Linear	366	Ceiling
Wynter Round	364	Ceiling
Wynter Round	456	Wall & Bath
Wynter Square	365	Ceiling
Wynter Square	455	Wall & Bath
Yukon	440	Wall & Bath
Zenith	186	Pendants
Zhane	334	Linear Suspension
Zhane Trio	285	Chandeliers
Zone	484	Wall & Bath
LOTIC	404	TTAIL & DALII



7400 Linder Ave. Skokie. IL 60077

Γ 847 410 4400 ⁻ 847 410 4500 W techlighting.com

921TLFLCAT17 GENERATION BRANDS